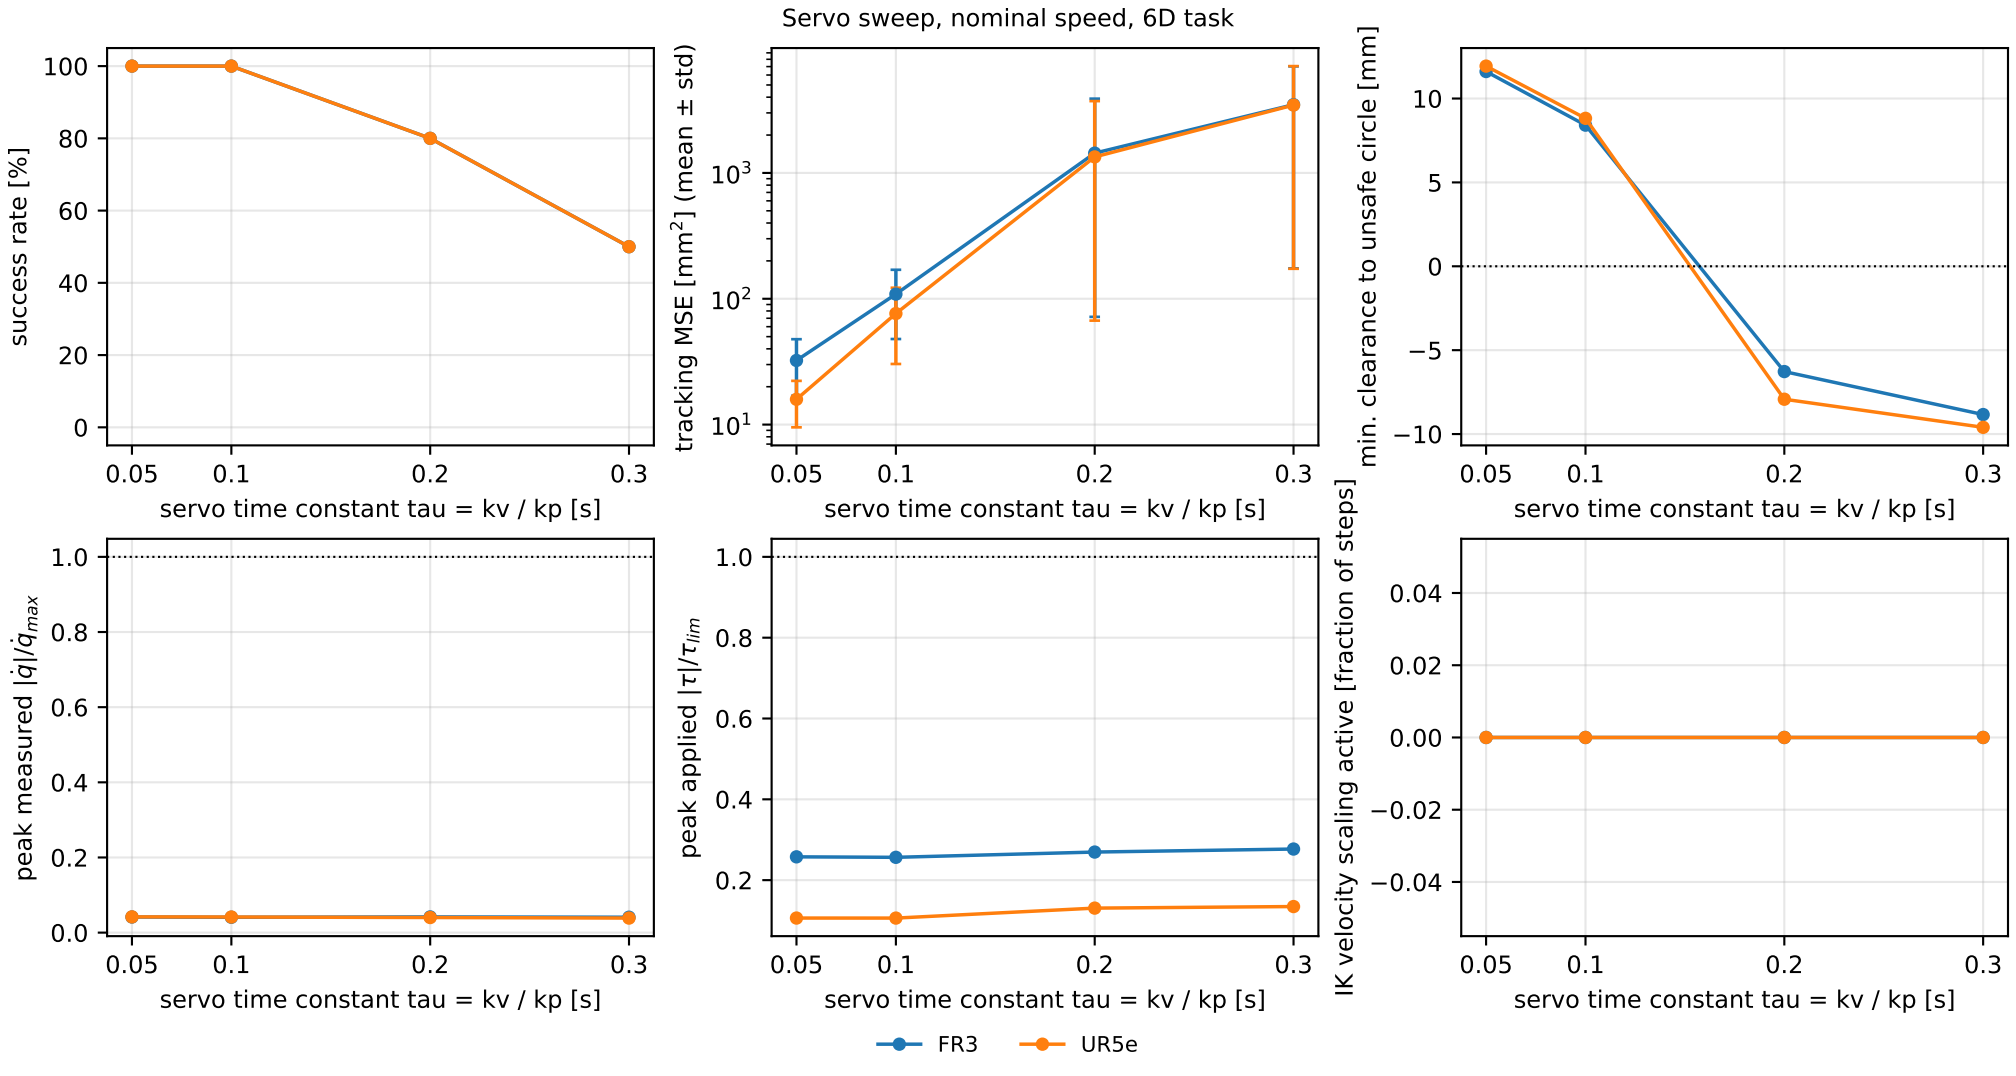
Servo sweep, nominal speed, 6D task
success rate [%]
tracking MSE [mm²] (mean ± std)
min. clearance to unsafe circle [mm]
peak measured |q̇|/q̇max
peak applied |τ|/τlim
IK velocity scaling active [fraction of steps]
servo time constant tau = kv / kp [s]
FR3
UR5e