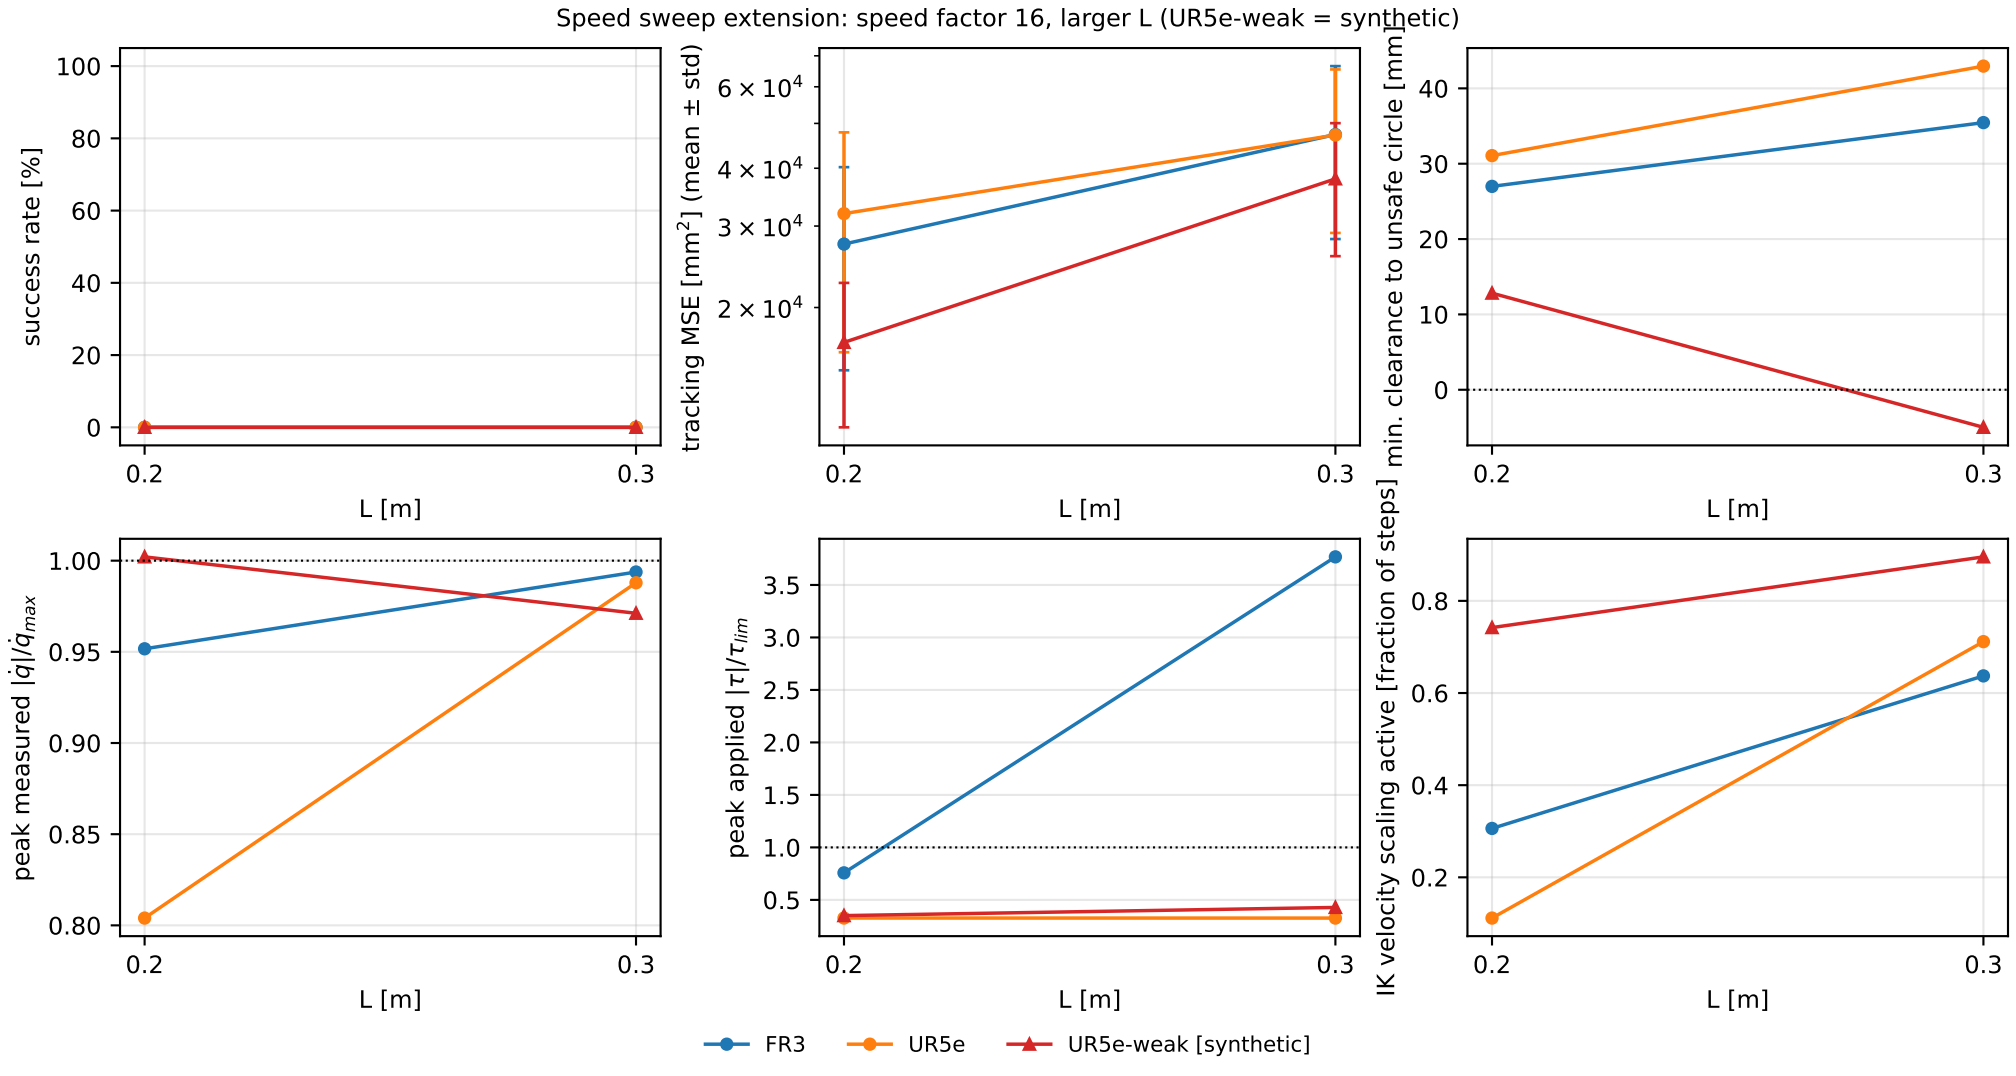
Speed sweep extension: speed factor 16, larger L (UR5e-weak = synthetic)
success rate [%]
tracking MSE [mm²] (mean ± std)
min. clearance to unsafe circle [mm]
peak measured |q̇|/q̇max
peak applied |τ|/τlim
IK velocity scaling active [fraction of steps]
L [m]
FR3
UR5e
UR5e-weak [synthetic]