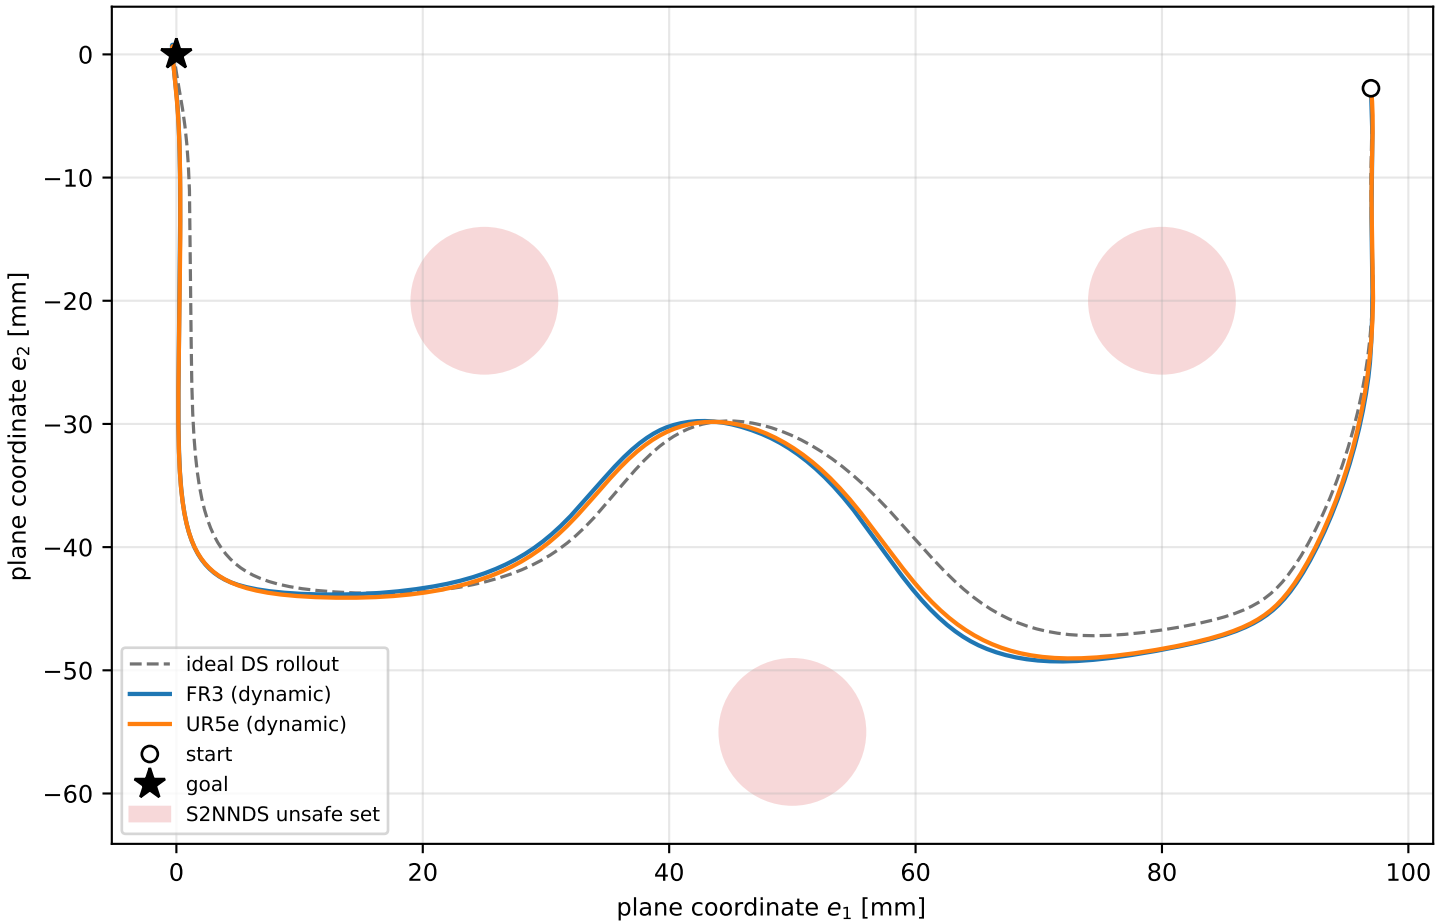

	FR3	UR5e
status	ok	ok
success (final err < 1 % L)	yes	yes
final goal error [mm]	1.03e-05	1.38e-11
RMSE (time-sync.) [mm]	6.65	5.36
max geom. deviation [mm]	3.1	2.54
min unsafe clearance [mm]	8.97	9.47
left training domain	no	no
peak |qd|/qd_max (measured)	0.030	0.019
peak |tau|/tau_lim (applied)	0.362	0.275
IK vel. scaling [% steps]	0.00	0.00
first limit event	none	none

FR3 torque ratio vs. documented limits 87/12 Nm (not enforced by the model).
ONNX and PTH differ (max 0.054); model used: pth.