3D_Shapes/Cshape_bottom (3D, model_f.pth), start 2 = (+0.145, +0.134, -0.915), task full6, L = 0.10 m
speed x1, T = 10 s, servo tau FR3 0.10 s, UR5e 0.10 s, null space off, spatial embedding

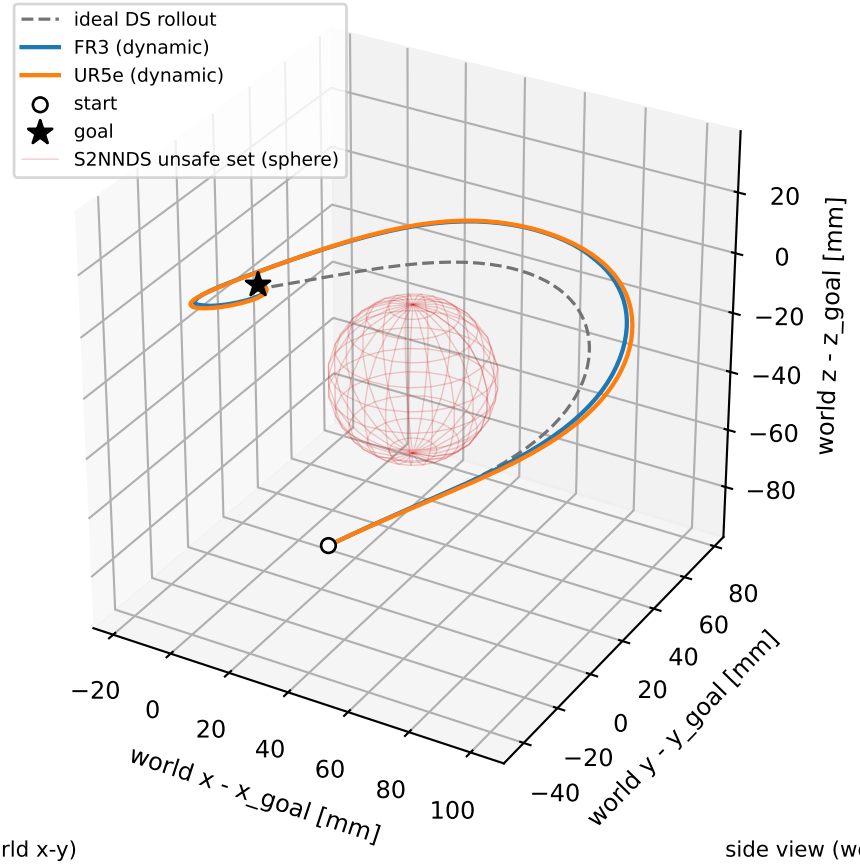


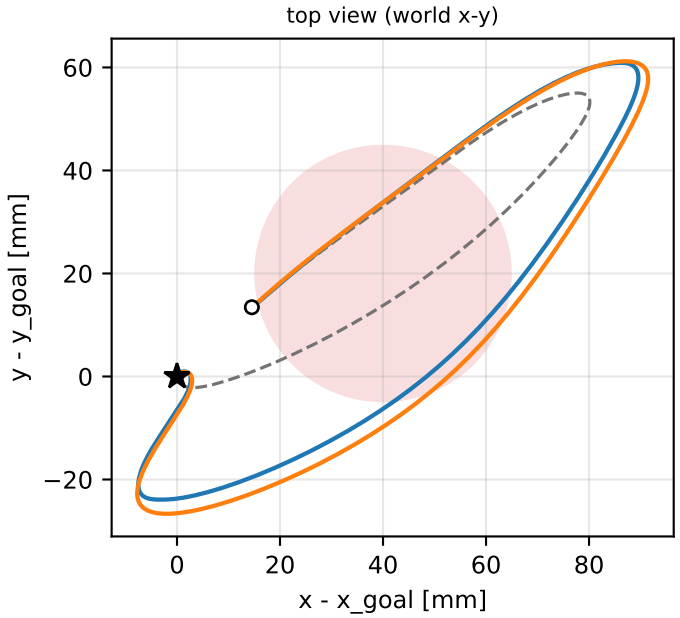


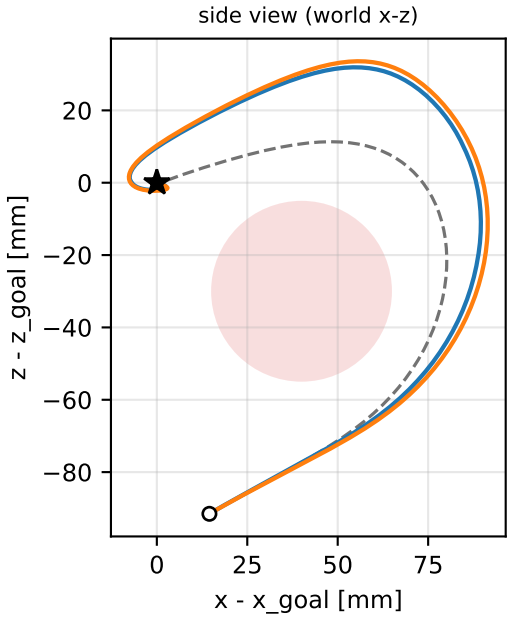


| | FR3 | UR5e |
|---|---|---|
| status | ok | ok |
| success (final err < 1 % L) | yes | yes |
| final goal error [mm] | 0.021 | 0.000295 |
| RMSE (time-sync.) [mm] | 19.8 | 21.6 |
| max geom. deviation [mm] | 26.3 | 29.4 |
| min unsafe clearance [mm] | 22.9 | 23.4 |
| entered unsafe set | no | no |
| left training domain | no | no |
| peak \|qd\|/qd_max (measured) | 0.138 | 0.109 |
| peak \|tau\|/tau_lim (applied) | 0.364 | 0.277 |
| IK vel. scaling [% steps] | 0.00 | 0.00 |
| first limit event | none | none |

FR3 torque ratio vs. documented limits 87/12 Nm (not enforced by the model).