


DG300-5.0

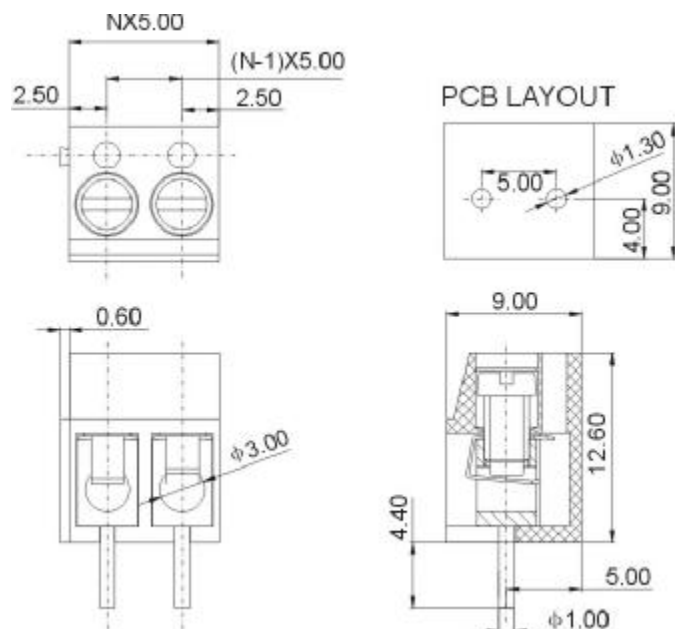

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

250V

10A

24A

22-14AWG

2.5mm²

AC2000V/1Min

Mechanical

Torque

Ambient temperature

Strip length

Dimensions

Pitch

Poles

0.5Nm(4.4Lb-In)

-30°C ~ +120 °C

5-6mm

5.0mm(.197")

2P,3P-24P

Material

Housing

Screws

Pin header

Wire guard

PBT,UL94V-0

M3,steel, Cr³⁺ Zn-plated

Brass,Tin plated

Stainless steel

HOW TO ORDER :

DG300-5.0

P

Customer Request



Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



DEGSON ELECTRONICS CO., LTD.

NAME

DG300-5.0