


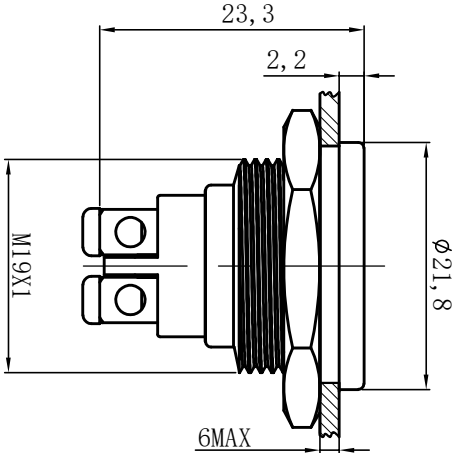



UNIT: mm (毫米)



灯珠等效电路:
Lamp bead equivalent circuit:



安装孔尺寸:
Mounting hole size:



技术要求:

Technical requirements:

1. 表面光洁, 平整无毛刺;

Smooth surface, smooth and without burr;

2. 参数/批次字迹清晰, 无错位;

The handwriting of the parameters/batch is clear and there is no dislocation;

3. 连接形式: 接插件/导线;

Connection form: connectors/wires;

4. 外观材料:

外壳: 黄铜/不锈钢

底座: PBT

Appearance materials:

Case: brass/stainless steel

Base: PBT,

5. 未标注公差按照GB/T 1804-m;

The unmarked tolerance is in accordance with GB/T 1804-m;

6. 灯参数: 额定电压: 3V/6V/12V/24V/36V; 110V/220V;

额定电流: $\leq 20\text{mA}$;

Lamp parameters: rated voltage :3V/6V/12V/24V/36V; 110V/220V;

Rated current: $\leq 20\text{mA}$;

7. 灯珠颜色: 红/绿/黄/橙/蓝/白;

Color of lamp beads: red/green/yellow/orange/blue/white;

8. 灯珠寿命: 50000小时;

Lamp bead life: 50000 hours;

9. 防护等级: IP67; IK09。

Protection grade: IP67; IK09.

YUEJING DAME ELECTRICAL CO.,LTD.		乐清市大和电气有限公司	
图号	图号	图号	图号
制图	审核	会签	日期
倪力晓	陈秋霞	2019.12.9	
单重	页码	第1页 共1页 (1/1)	
名称 (TITLE):		M19 金属防水指示灯	
图号 (DWG NO.):		HBDGQ19T-D/L	