

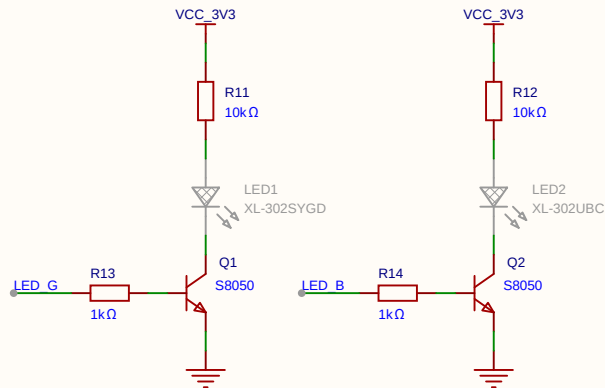


TYPE-C

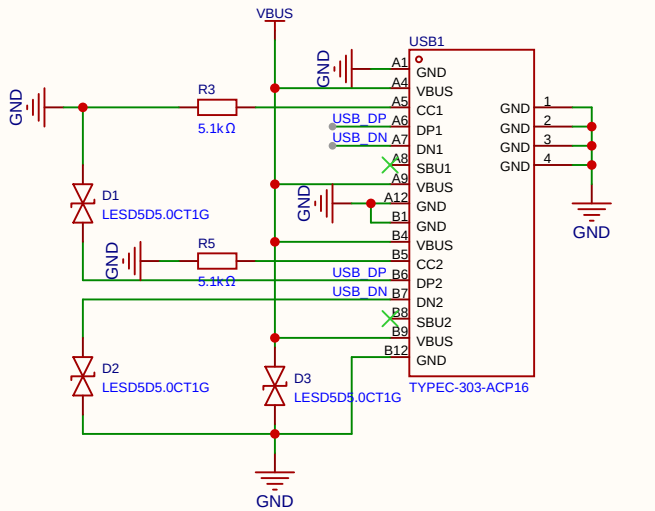


ESP32-S3

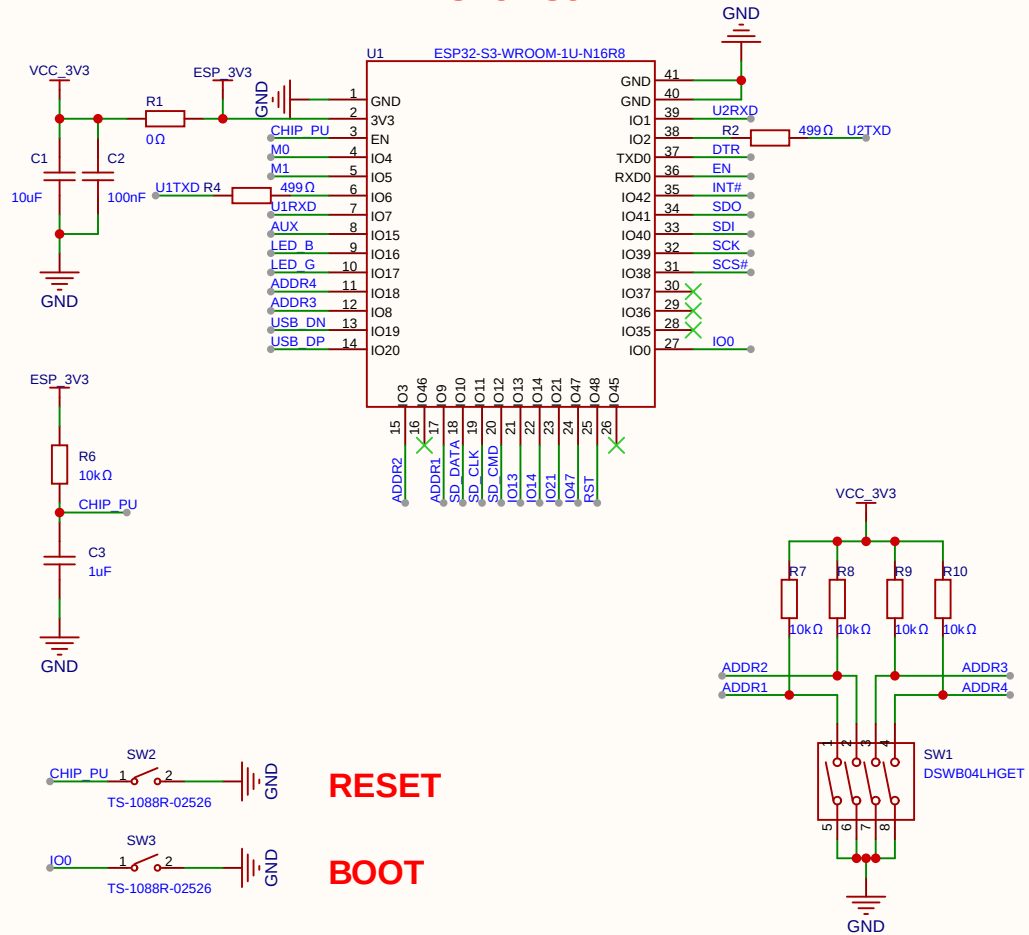



1.In module variants that have embedded OSPI PSRAM, i.e., that embed ESP32-S3R8, pins IO35, IO36, and IO37 connect to the OSPI PSRAM and are not available for other uses.
2.IO0 and IO46 control boot mode, IO46 can not be connected to the pull-up, otherwise it will not be able to enter the download mode.
IO45 is to control the VDD voltage, external use do not connect up and down.

原理图	ESP32_Adapter_V2		更新日期	2026-04-25
			创建日期	2026-01-30
图页	ESP32		物料编码	
绘制	ESP32_Adapter_V2			
审阅				
	版本	尺寸	页	1 共 7
嘉立创EDA		V1.0	A4	phoenix

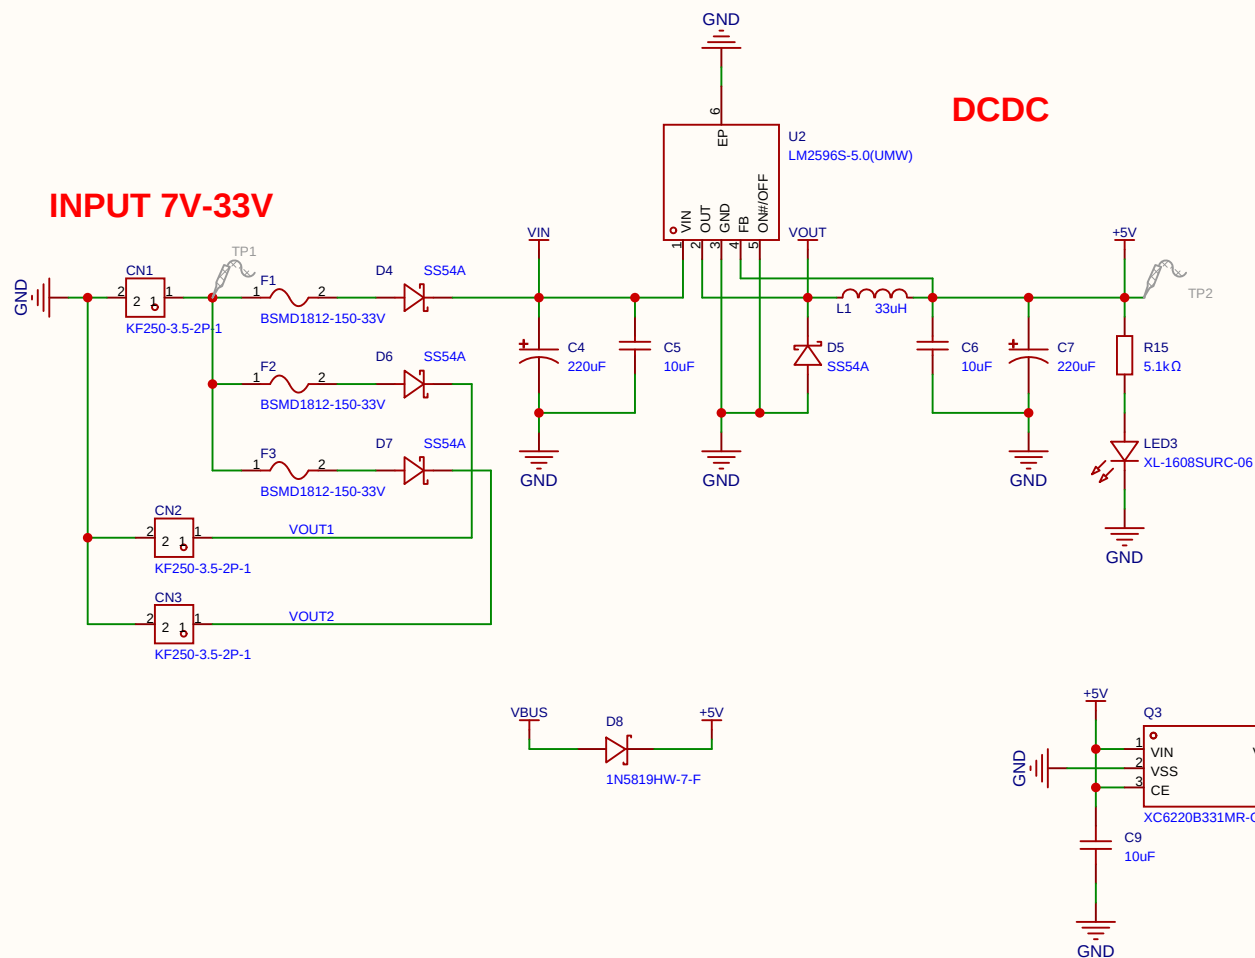





原理图	ESP32_Adapter_V2		更新日期	2026-01-30
			创建日期	2026-01-30
图页	POWER		物料编码	
绘制		ESP32_Adapter_V2		
审阅				
		版本	尺寸	页 2 共 7
嘉立创EDA		V1.0	A4	phoenix

RS232




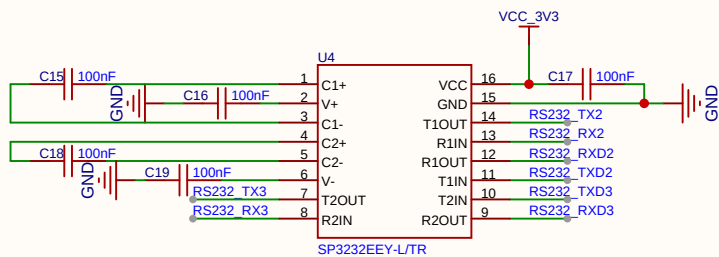
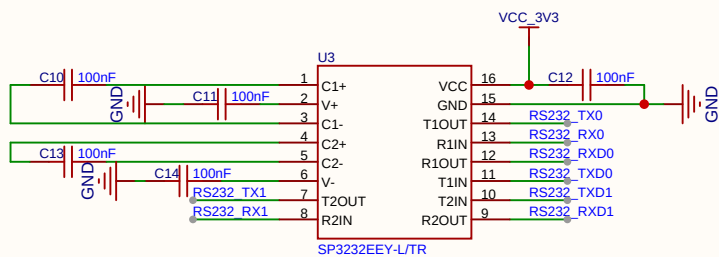


原理图	ESP32_Adapter_V2		更新日期	2026-01-30
			创建日期	2026-01-26
图页	RS232		物料编码	
绘制		ESP32_Adapter_V2		
审阅				
		版本	尺寸	页 3 共 7
嘉立创EDA		V1.0	A4	phoenix




RS485

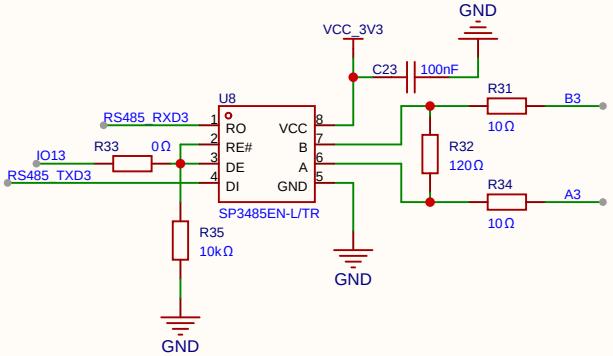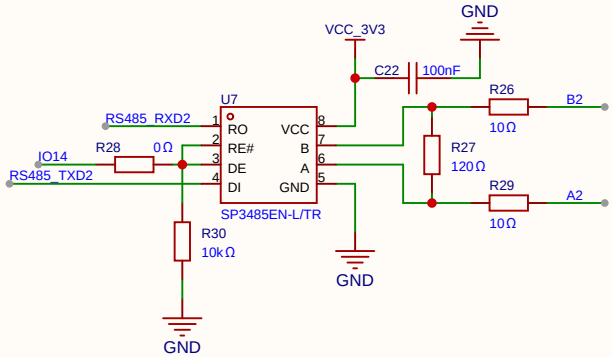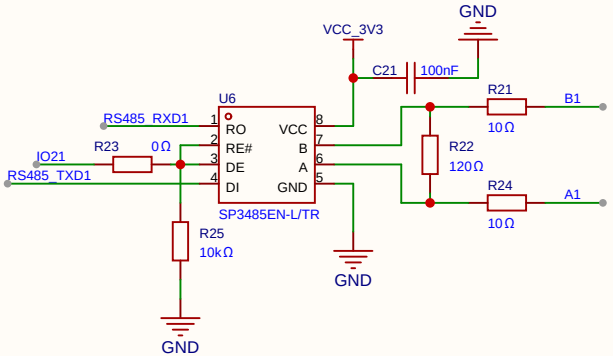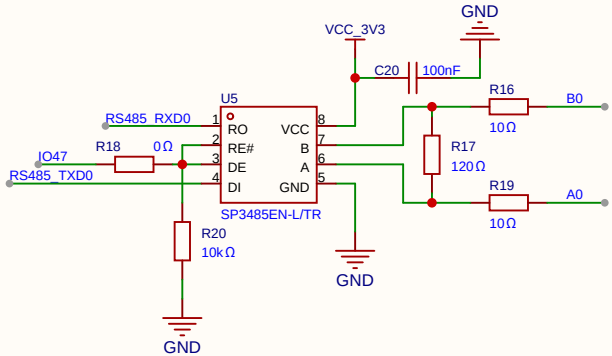

原理图	ESP32_Adapter_V2		更新日期	2026-01-30
			创建日期	2026-01-30
图页	RS485		物料编码	
绘制		ESP32_Adapter_V2		
审阅				
		版本	尺寸	页 4 共 7
嘉立创EDA		V1.0	A4	phoenix

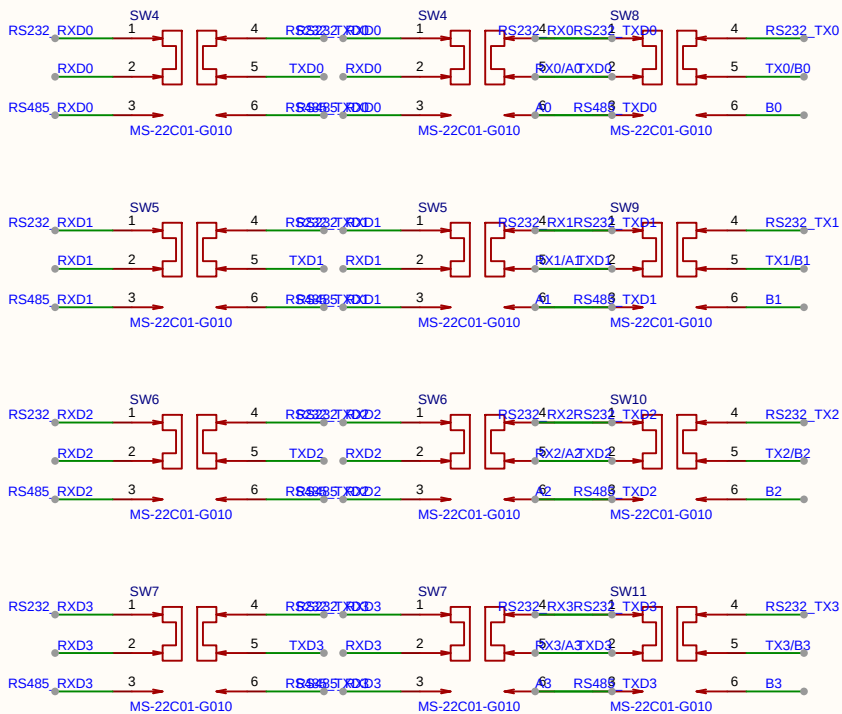

原理图	ESP32_Adapter_V2			更新日期	2026-01-30
				创建日期	2026-01-26
图页	SW			物料编码	
绘制		ESP32_Adapter_V2			
审阅					
		版本	尺寸	页 5 共 7	
嘉立创EDA		V1.0	A4	phoenix	

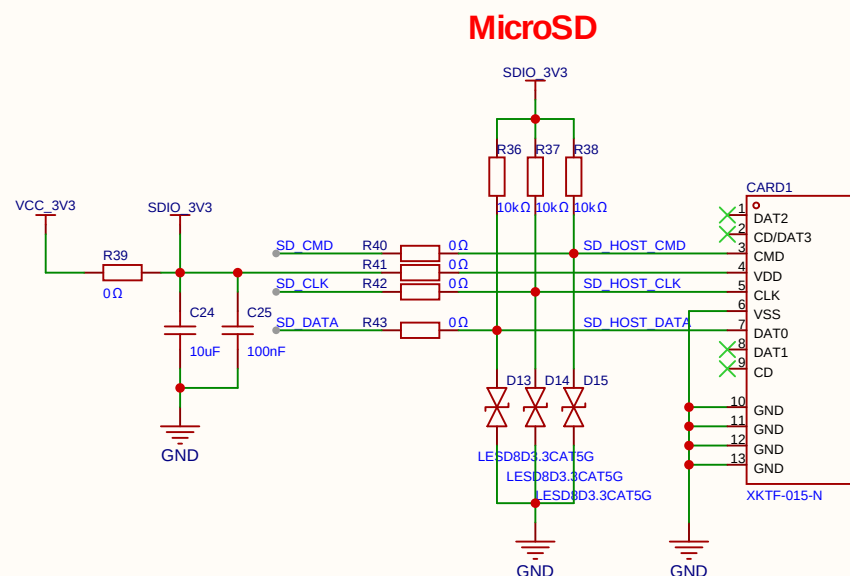

原理图	ESP32_Adapter_V2		更新日期	2026-01-30
			创建日期	2026-01-30
图页	RF/4G/SDCARD		物料编码	
绘制		ESP32_Adapter_V2		
审阅				
		版本	尺寸	页 6 共 7
嘉立创EDA		V1.0	A4	phoenix

