

## 24 V power supply for hatbrick and LED drivers (Mean Well LDD 700, 500, 350 mA)

### 12 V power supply for PWM 1 and PWM 2 Ports


PWM Pins: 1(-) 2(+) 3(not connected) 4(PWM in)

Power 24 V 6 A DC


Pi Fan Connection 12 V

Power 12 V 5 A DC

The setup can be bridged to be powered by using just the 12 V power supply



Led-Driver 700mA (4 times)  
Led Driver 500mA (1 times)  
Led Driver 350mA (1 times)

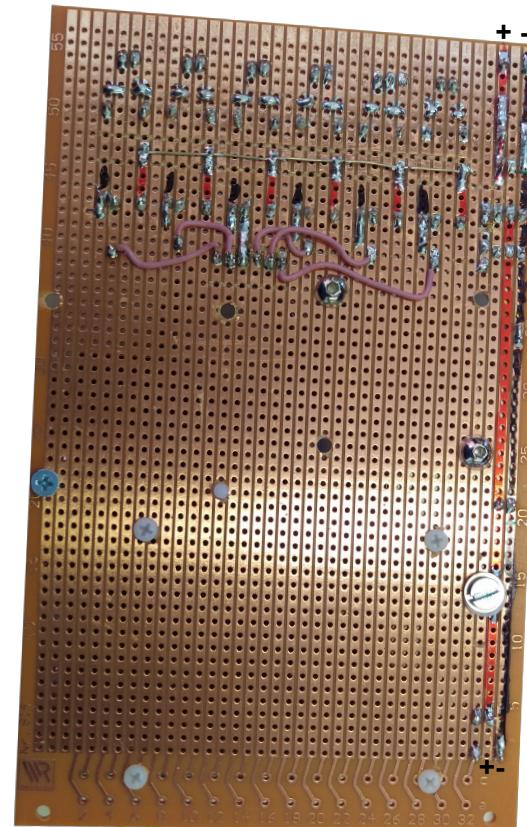

Stripboard Rademacher WR 914-HP

160x100mm 2.54mm Contact Spacing