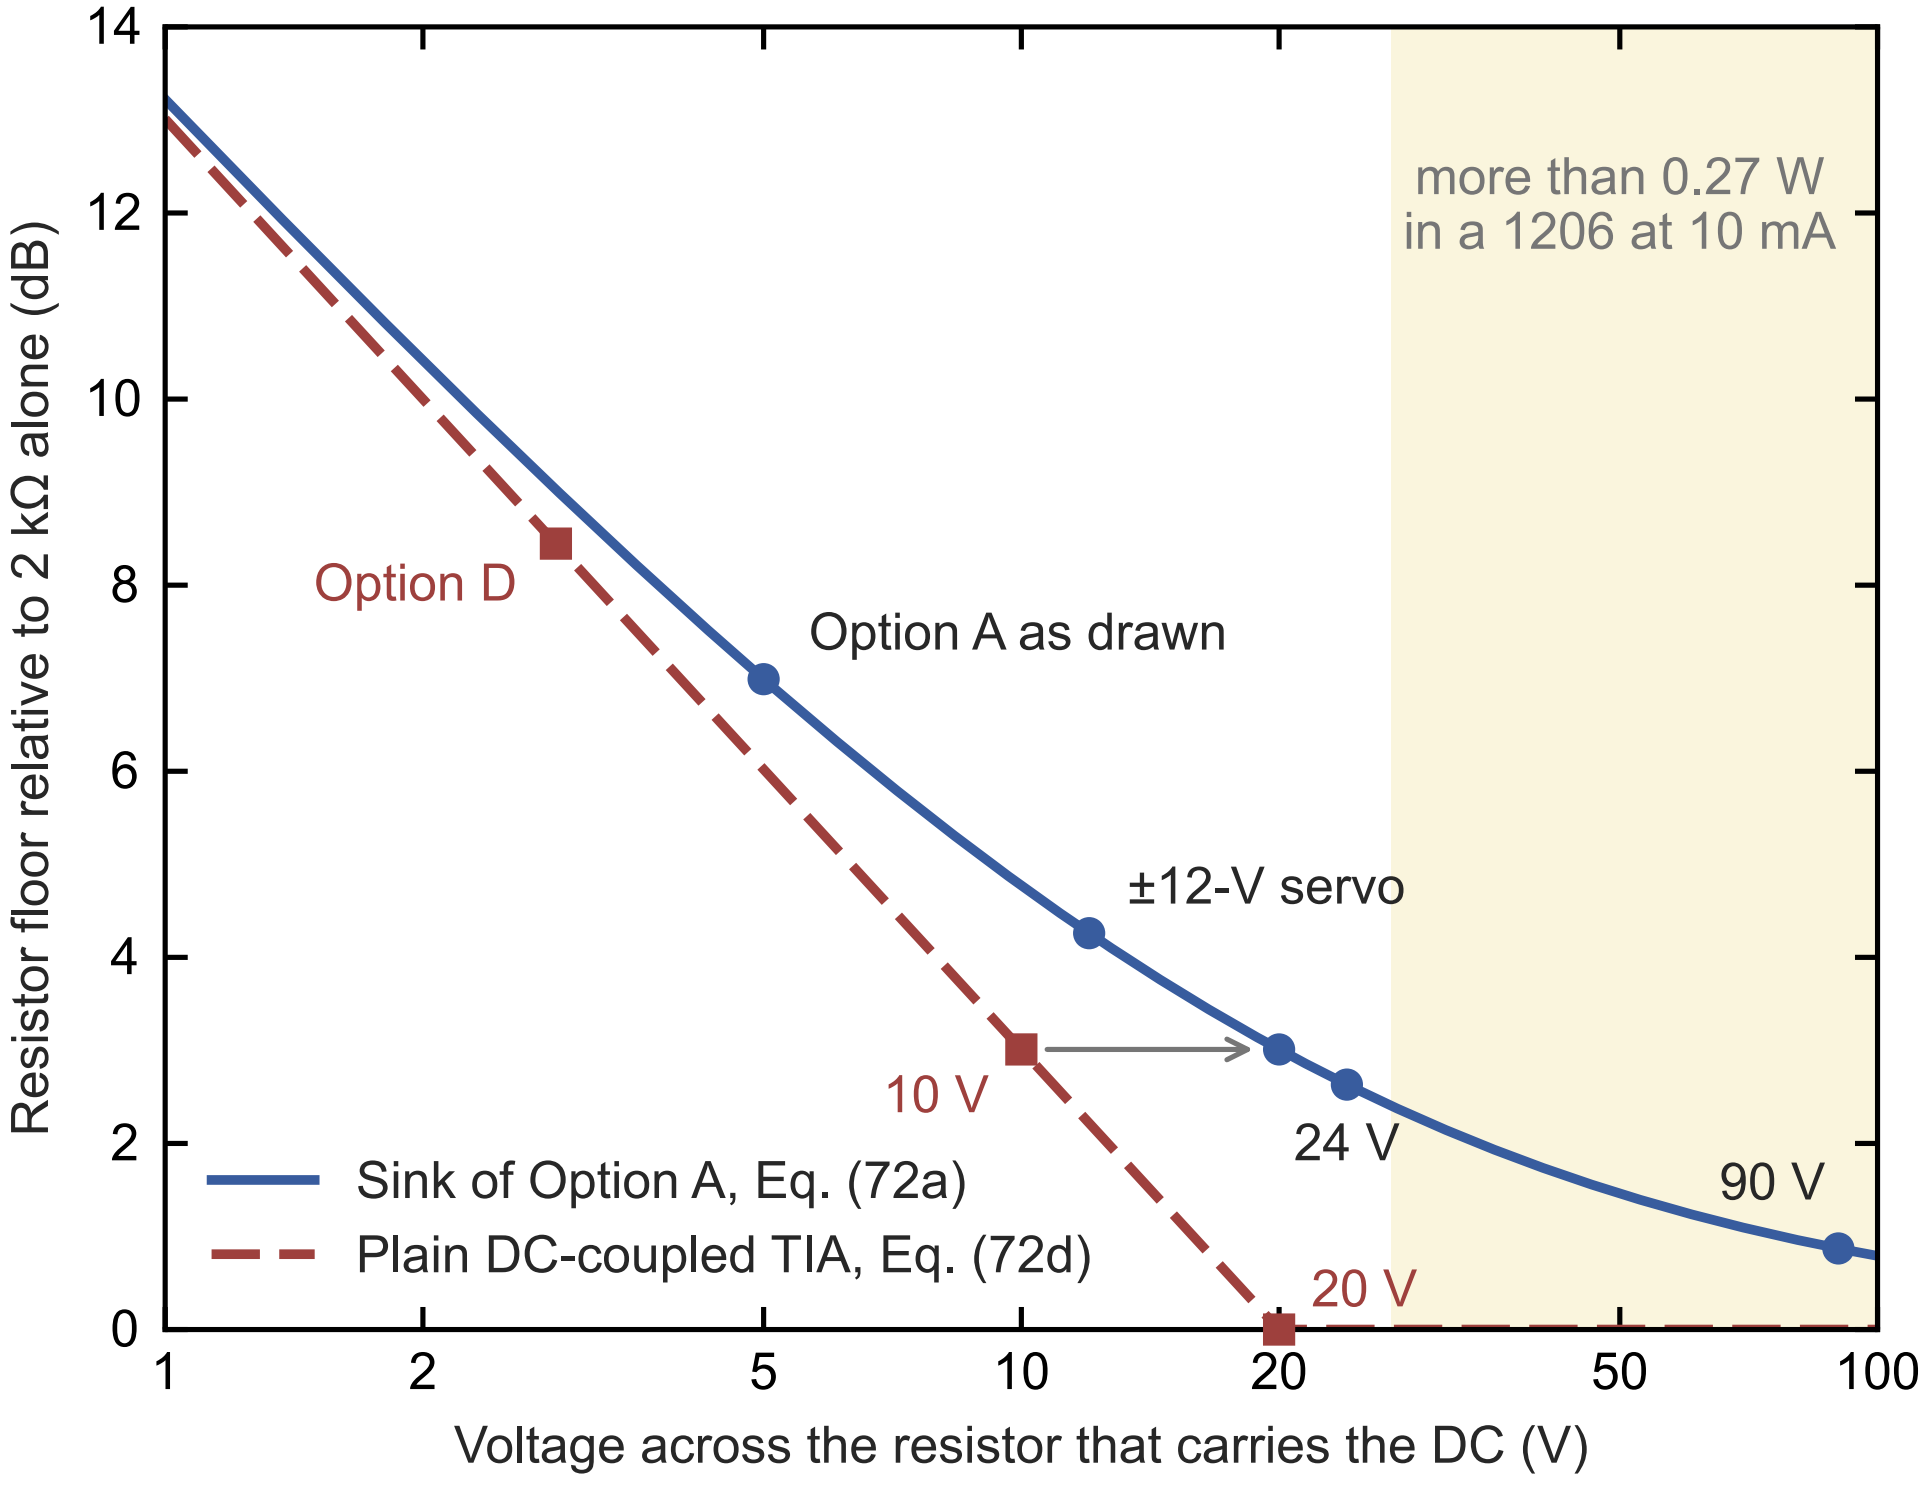
Resistor floor relative to 2 kΩ alone (dB)
14
12
10
8
6
4
2
0
1
2
5
10
20
50
100
Voltage across the resistor that carries the DC (V)
more than 0.27 W
in a 1206 at 10 mA
Option D
Option A as drawn
±12-V servo
10 V
24 V
90 V
20 V
Sink of Option A, Eq. (72a)
Plain DC-coupled TIA, Eq. (72d)