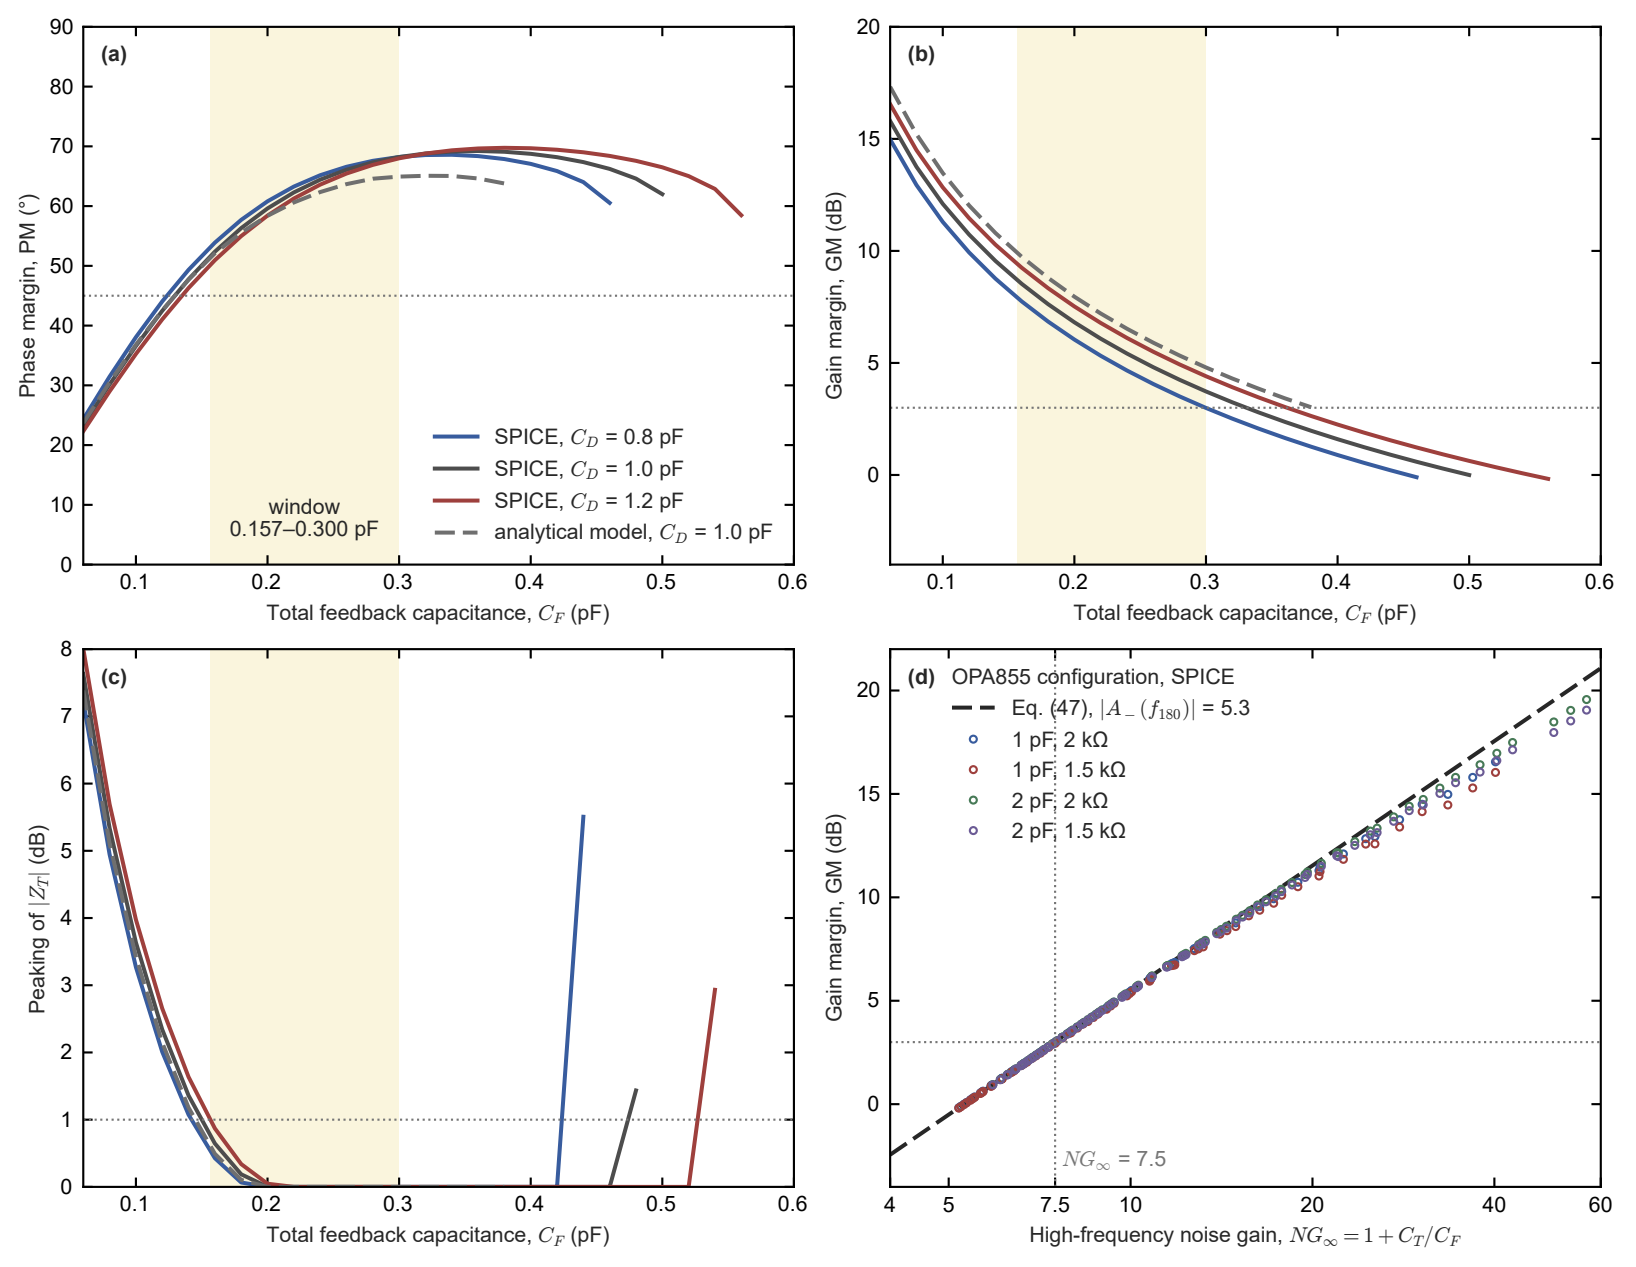

(a)
Phase margin, PM (°)
Total feedback capacitance, C_F (pF)
window
0.157–0.300 pF
SPICE, C_D = 0.8 pF
SPICE, C_D = 1.0 pF
SPICE, C_D = 1.2 pF
analytical model, C_D = 1.0 pF
(b)
Gain margin, GM (dB)
Total feedback capacitance, C_F (pF)
(c)
Peaking of $|Z_T|$ (dB)
Total feedback capacitance, C_F (pF)
(d) OPA855 configuration, SPICE
Eq. (47), $|A_-(f_{180})|$ = 5.3
1 pF, 2 kΩ
1 pF, 1.5 kΩ
2 pF, 2 kΩ
2 pF, 1.5 kΩ
NG_∞ = 7.5
Gain margin, GM (dB)
High-frequency noise gain, $NG_\infty = 1 + C_T/C_F$