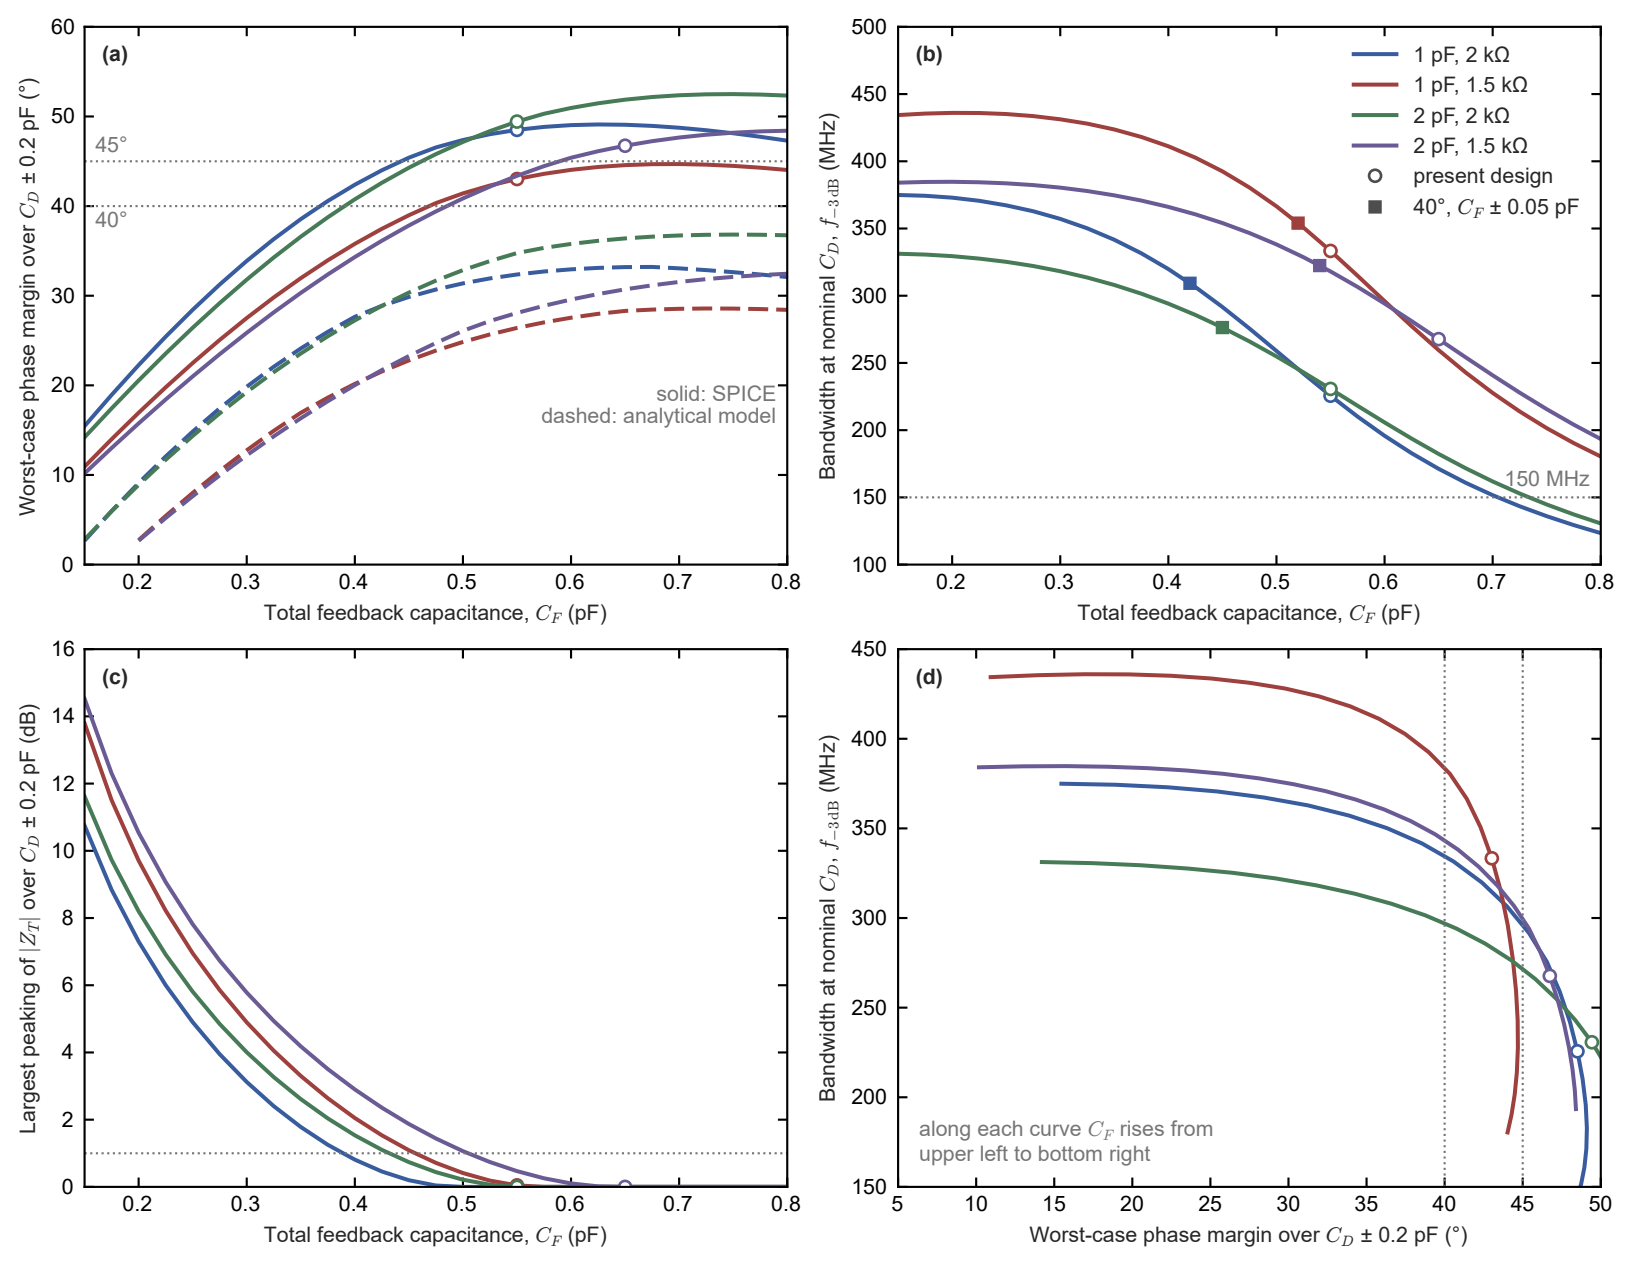

(a)
45°
40°
solid: SPICE
dashed: analytical model
Worst-case phase margin over C_D ± 0.2 pF (°)
Total feedback capacitance, C_F (pF)
(b)
1 pF, 2 kΩ
1 pF, 1.5 kΩ
2 pF, 2 kΩ
2 pF, 1.5 kΩ
present design
40°, C_F ± 0.05 pF
150 MHz
Bandwidth at nominal C_D, $f_{-3\,\mathrm{dB}}$ (MHz)
Total feedback capacitance, C_F (pF)
(c)
Largest peaking of $|Z_T|$ over C_D ± 0.2 pF (dB)
Total feedback capacitance, C_F (pF)
(d)
along each curve C_F rises from
upper left to bottom right
Bandwidth at nominal C_D, $f_{-3\,\mathrm{dB}}$ (MHz)
Worst-case phase margin over C_D ± 0.2 pF (°)