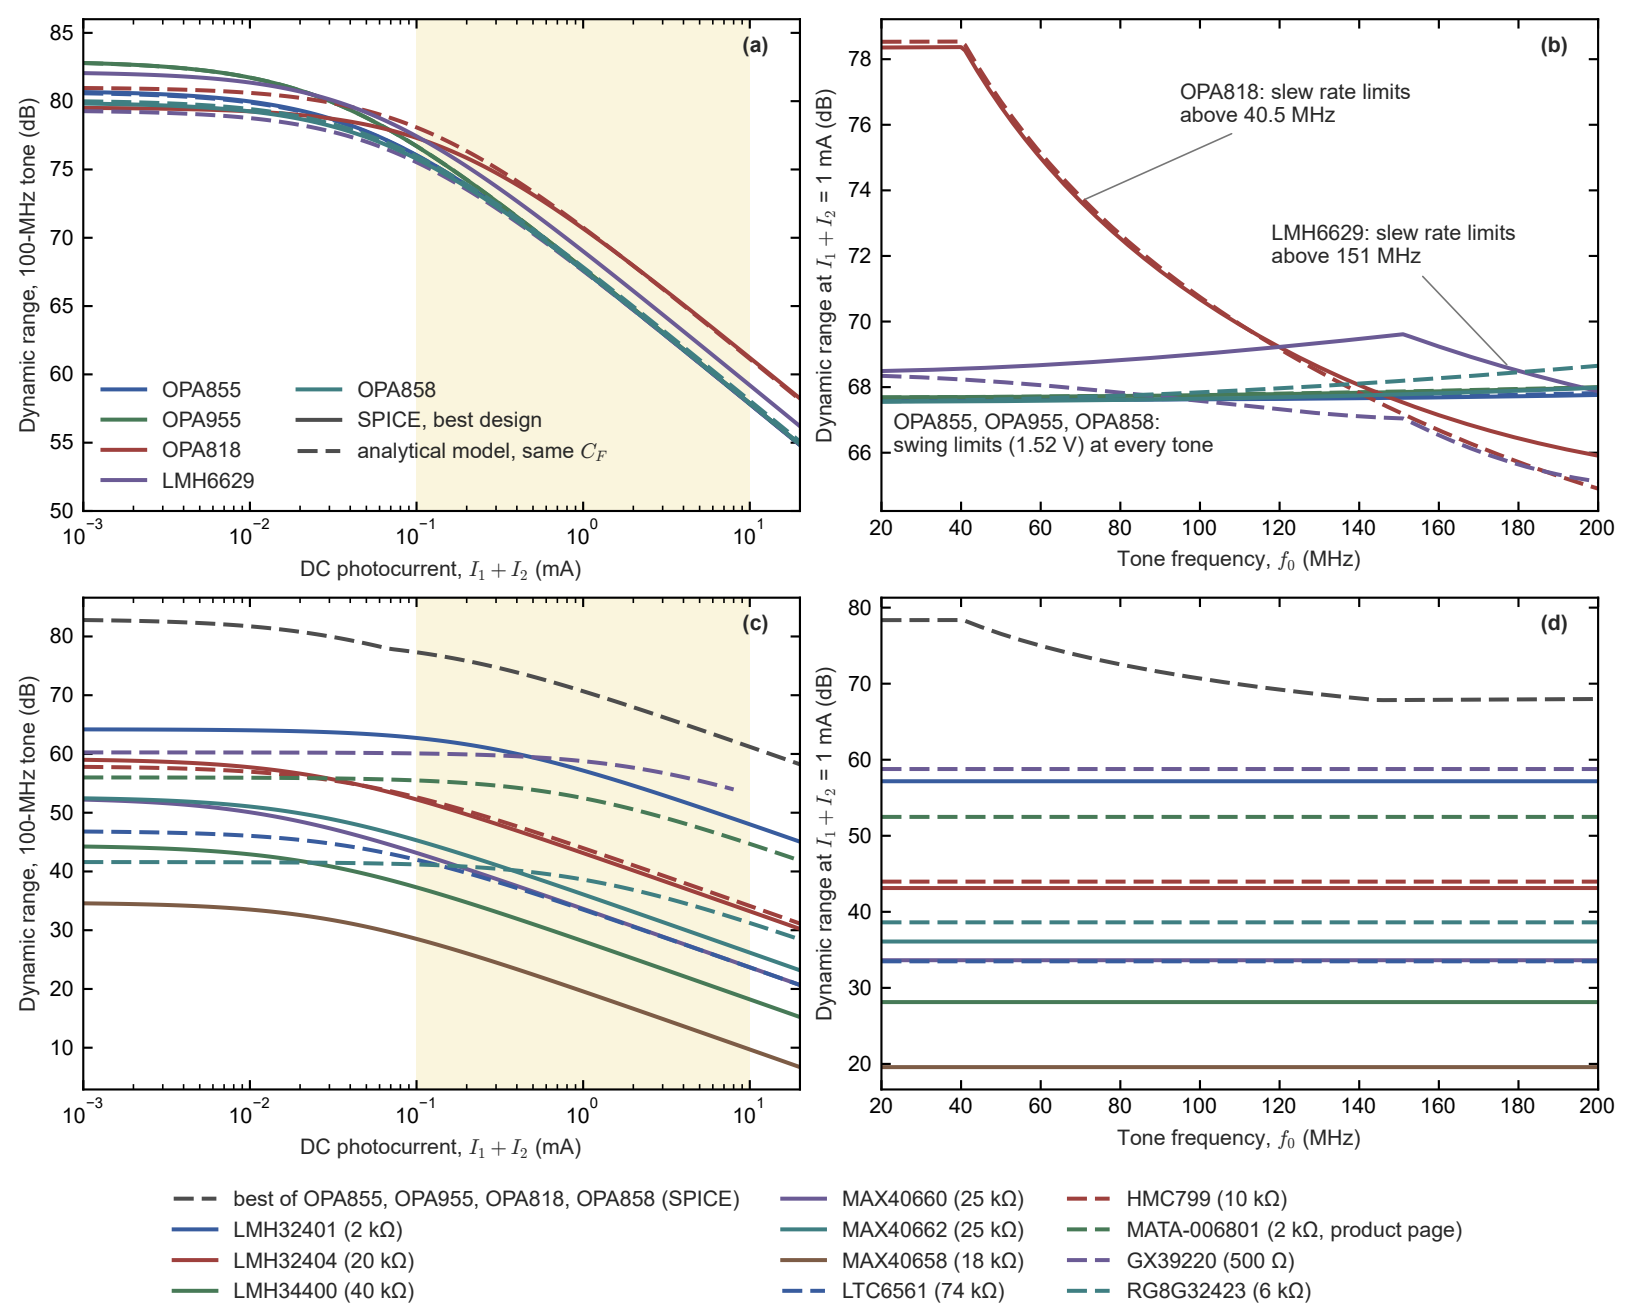

(a)
Dynamic range, 100-MHz tone (dB)
DC photocurrent, $I_1 + I_2$ (mA)
OPA855
OPA955
OPA818
LMH6629
OPA858
SPICE, best design
analytical model, same C_F
(b)
Dynamic range at $I_1 + I_2$ = 1 mA (dB)
Tone frequency, f_0 (MHz)
OPA818: slew rate limits above 40.5 MHz
LMH6629: slew rate limits above 151 MHz
OPA855, OPA955, OPA858: swing limits (1.52 V) at every tone
(c)
Dynamic range, 100-MHz tone (dB)
DC photocurrent, $I_1 + I_2$ (mA)
(d)
Dynamic range at $I_1 + I_2$ = 1 mA (dB)
Tone frequency, f_0 (MHz)
best of OPA855, OPA955, OPA818, OPA858 (SPICE)
LMH32401 (2 kΩ)
LMH32404 (20 kΩ)
LMH34400 (40 kΩ)
MAX40660 (25 kΩ)
MAX40662 (25 kΩ)
MAX40658 (18 kΩ)
LTC6561 (74 kΩ)
HMC799 (10 kΩ)
MATA-006801 (2 kΩ, product page)
GX39220 (500 Ω)
RG8G32423 (6 kΩ)