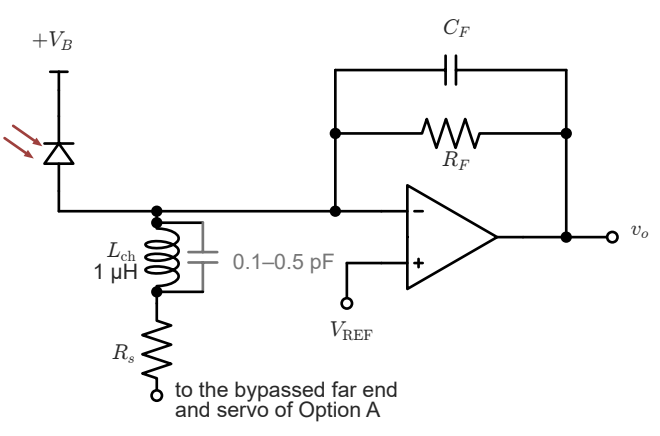
$+V_B$
C_F
R_F
v_o
L_{ch}
1 μH
0.1–0.5 pF
V_{REF}
R_s
to the bypassed far end
and servo of Option A