

书房/影音室 - 12ab



房间宽 3.8m, 长 5.5m, 柜子高度可以介于 114~138cm (听音距离 2.6m, 俯仰角 10 到 15 度)

最初只会购买两声道, 一开始不会购入电视. 只需预留管线就好

距离\俯仰角	5	10	15	人耳高度 (cm)	95
240	89.80	111.12	133.11	音箱总高 (cm)	57
250	90.67	112.88	135.79	音箱架高(cm)	2.3
260	91.55	114.65	138.47	柜子高度	68.8
270	92.42	116.41	141.15		



真力 (Genelec) 8331A 8341A 8351B 8361A 三分频同轴有源监听音箱 8361A 砂岩灰【一对】
¥84726.94
到手价 ¥87730

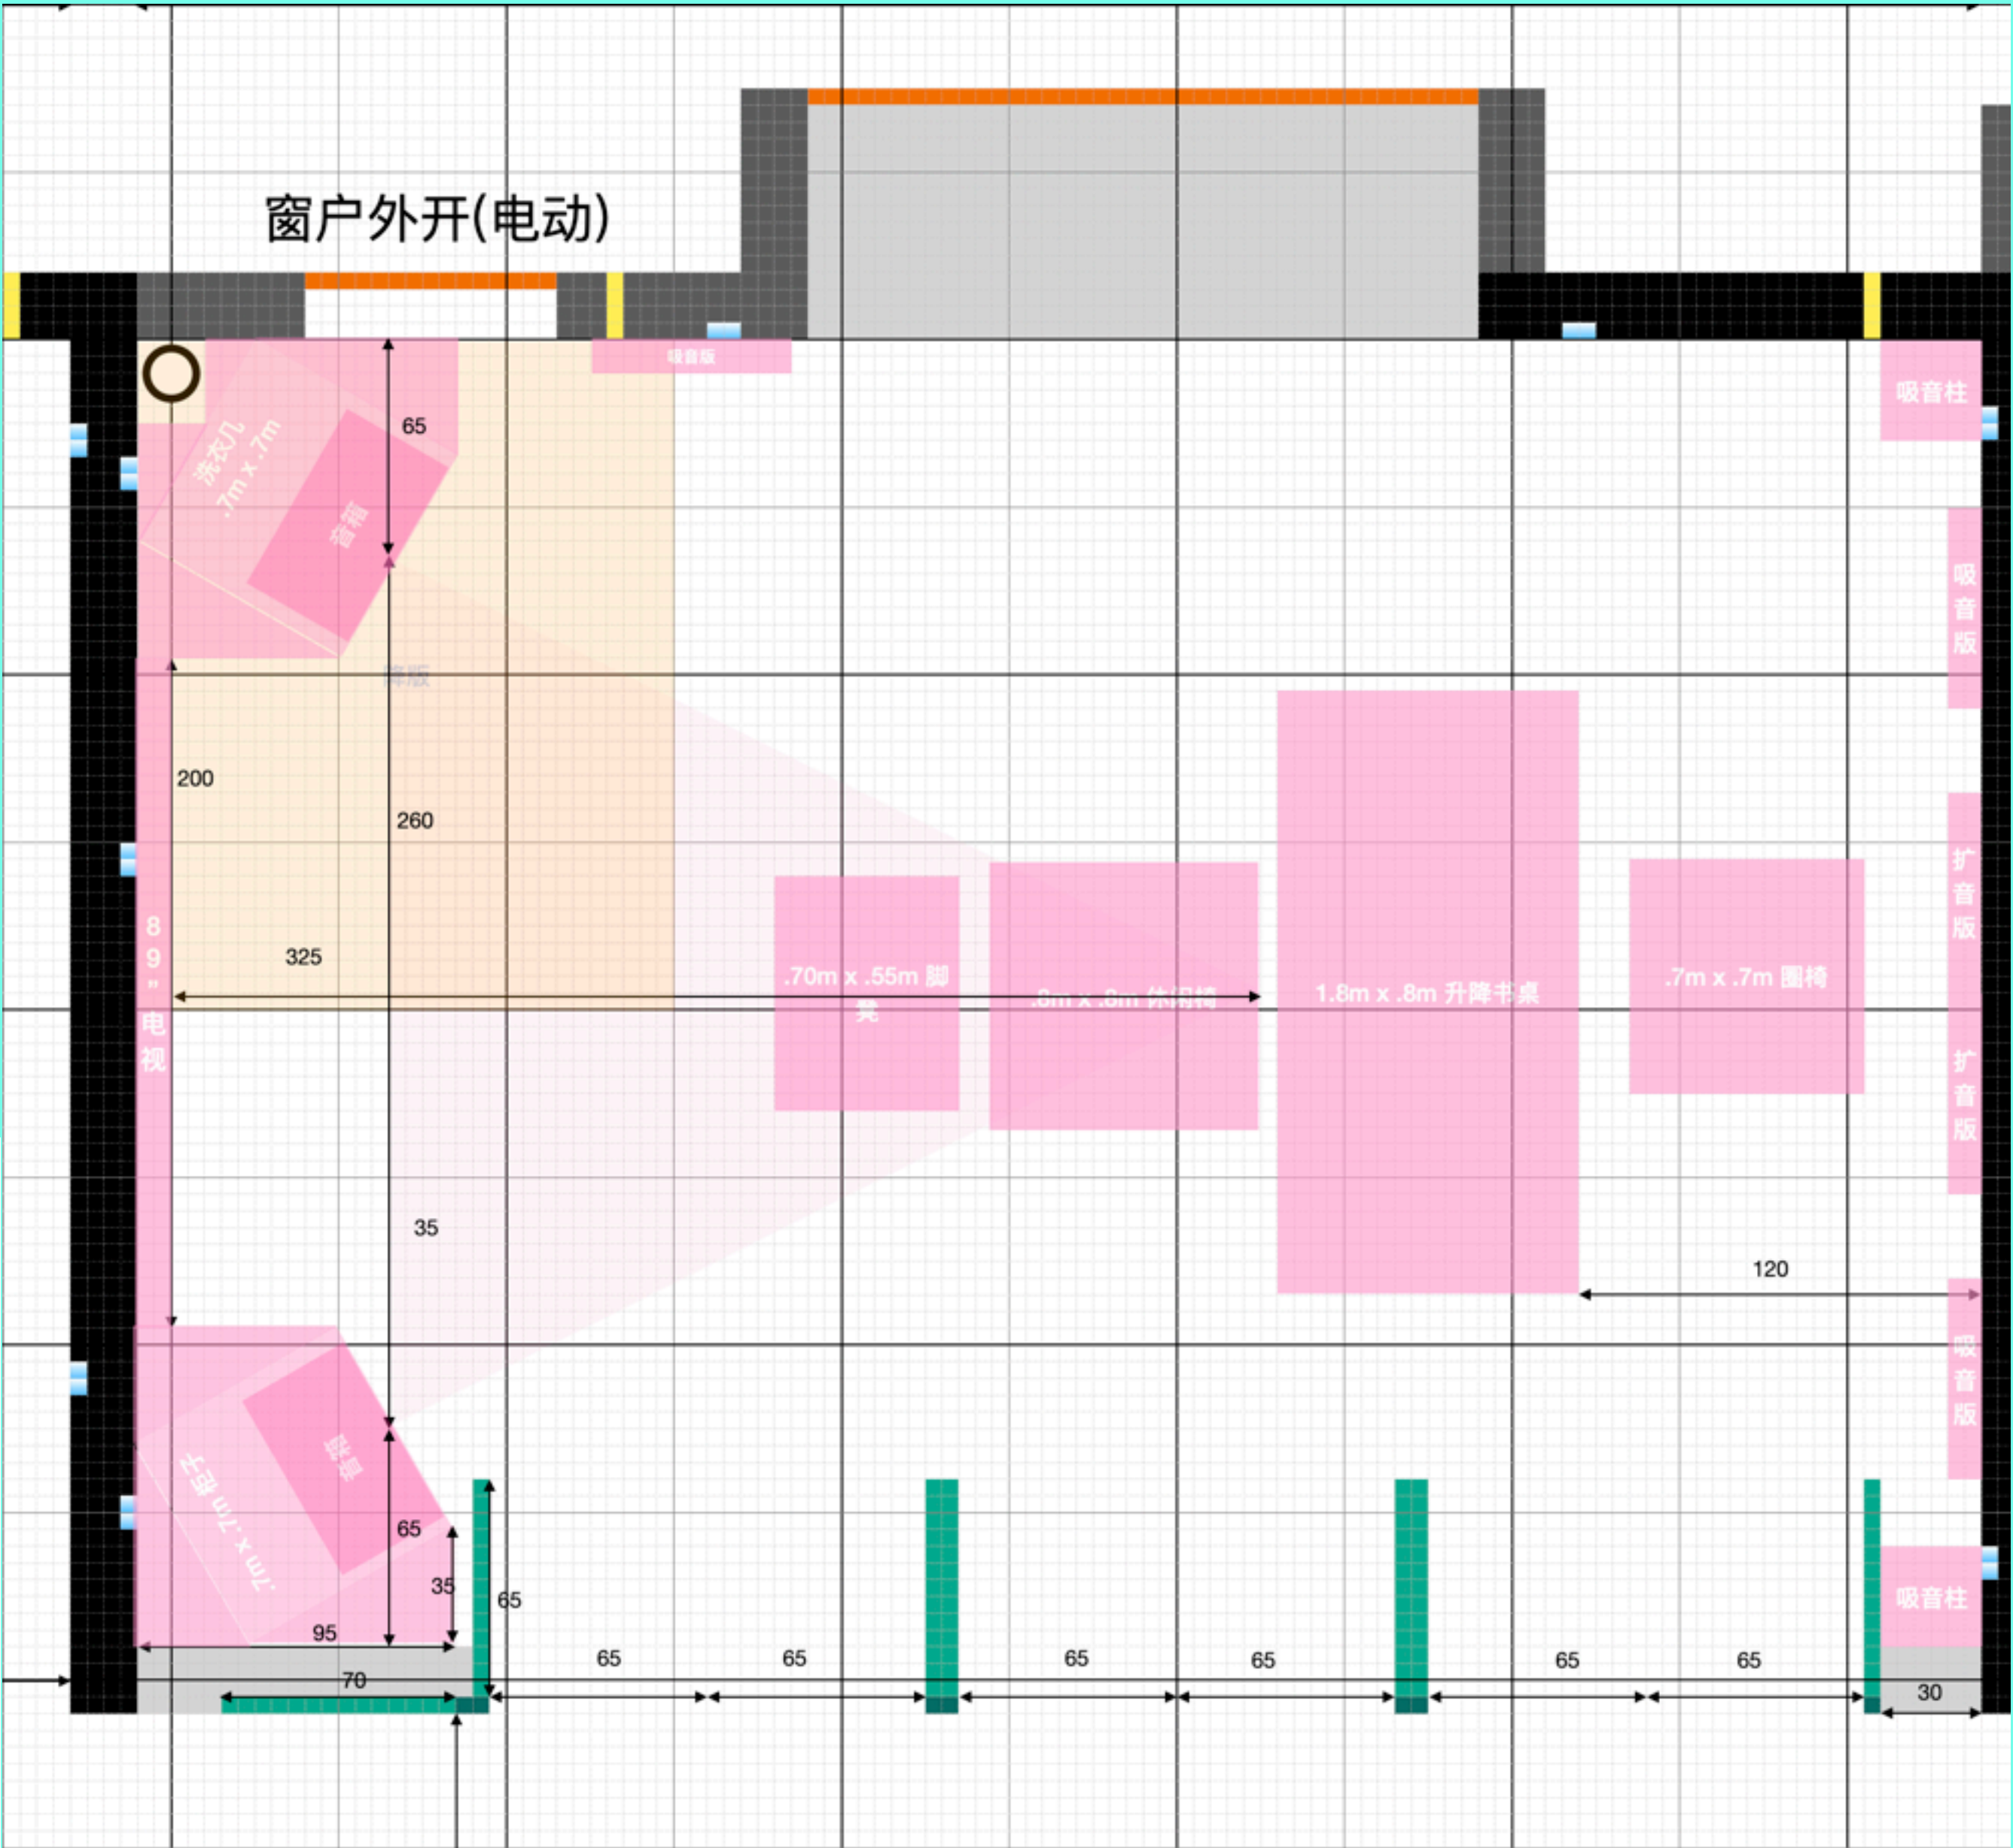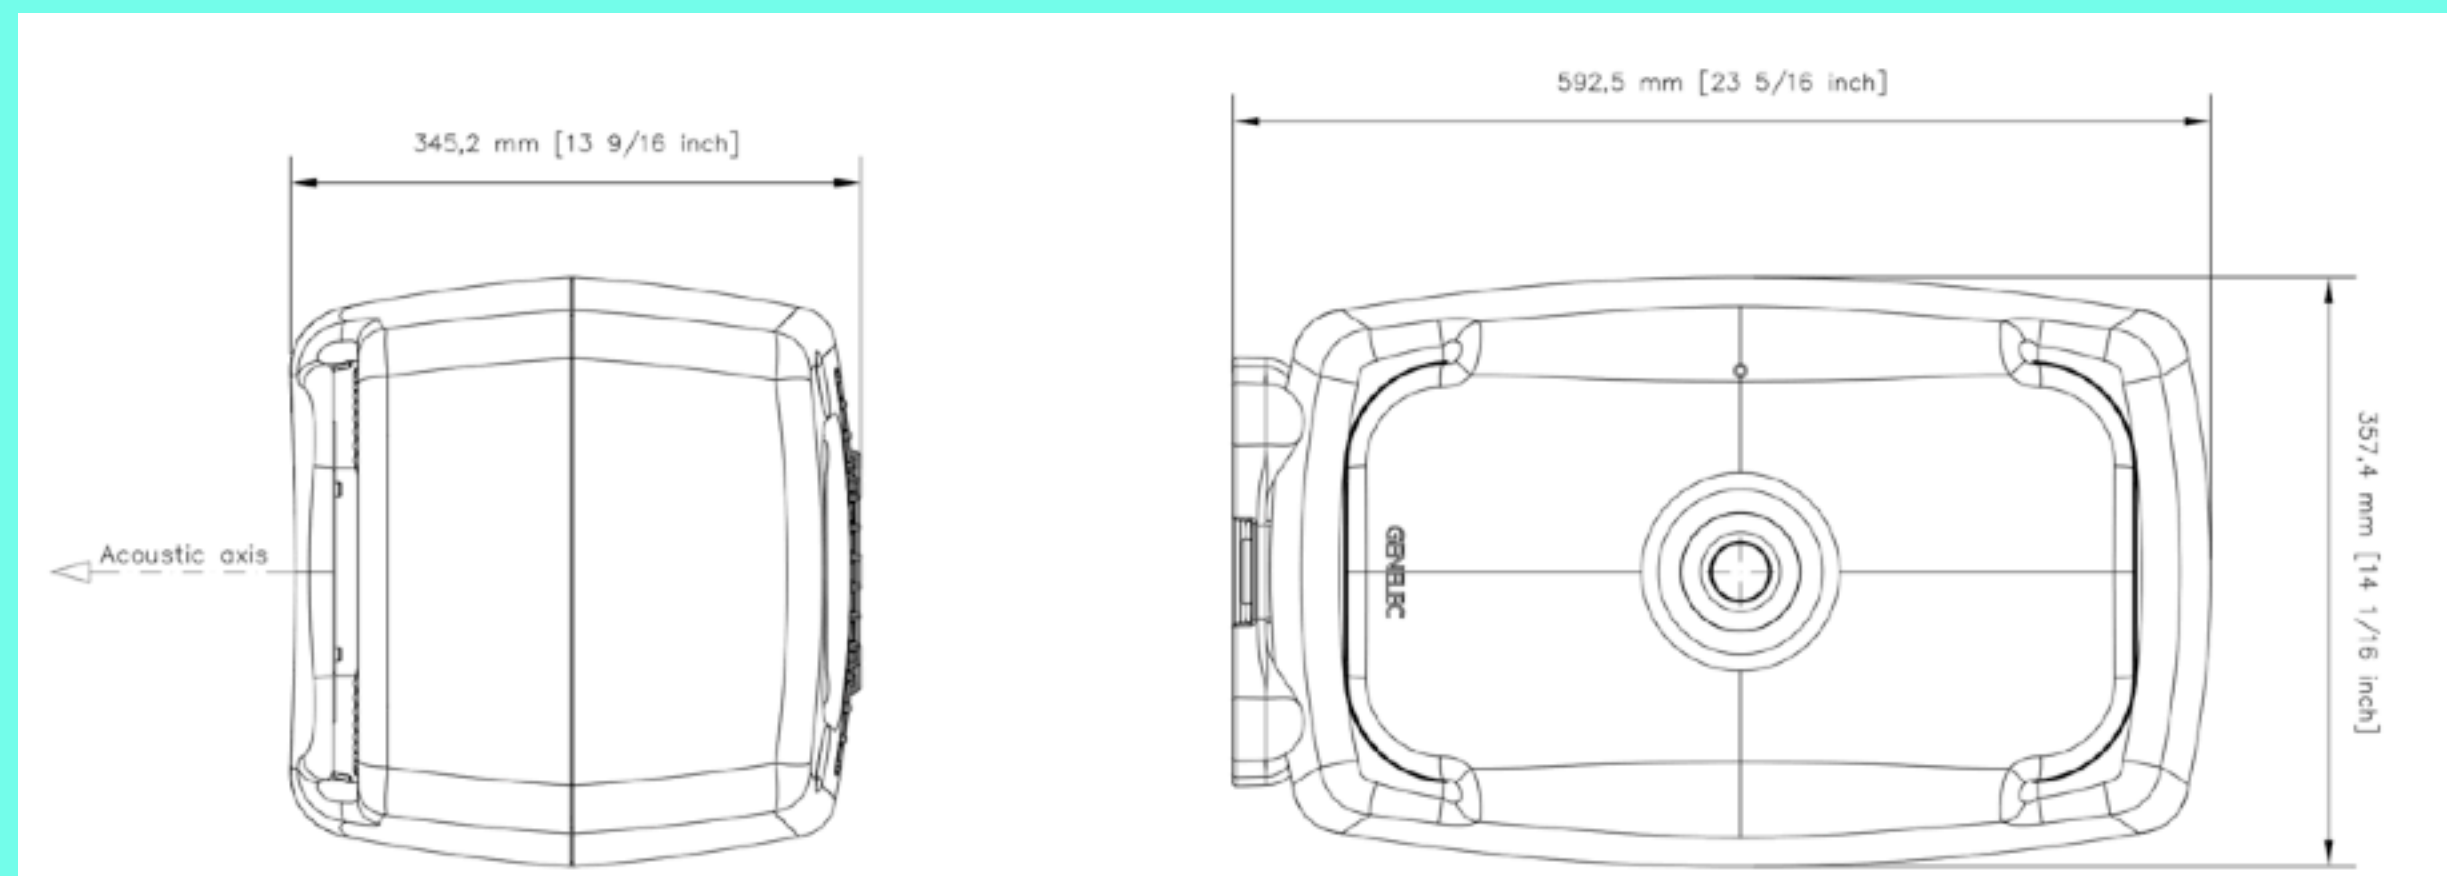

影音设备-其它





2030 年前不会购入， 只需留好管线. 如果能考虑与装潢整合则更好, 另外使用何种声学材料需与厂商对接后再确定

优先考虑 8361(白)， 如果没有再考虑 ATC SCM50

8341A	
Maximum sound pressure level¹	110 dB
Free field frequency response	38 Hz - 37 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (45 Hz - 20 kHz)
Drivers	2 x oval Bass (90 x 170 mm, 3 ¹¹ / ₃₂ x 6 ¹¹ / ₁₆ inch) + Coaxial Midrange (90 mm, 3 ¹⁷ / ₃₂ inch) + Treble MDC™ (19 mm, 3/4 inch metal dome) + DCW™
Amplifier power per channel	250 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	370 x 237 x 243 mm, 14 ⁹ / ₁₆ x 9 ¹¹ / ₃₂ x 9 ⁹ / ₁₆ inch, with Iso-Pod™
Weight	9.8 kg / 21.6 lb
Connectors	1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output, 2 x RJ45 GLM Network

8351B	
Maximum sound pressure level¹	113 dB
Free field frequency response	32 Hz - 43 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (38 Hz - 20 kHz)
Drivers	2 x oval Bass (101 x 218 mm, 3 ³¹ / ₃₂ x 8 ¹⁹ / ₃₂ inch) + Coaxial Midrange (130 mm, 5 ¹ / ₈ inch) + Treble MDC™ (25 mm, ³¹ / ₃₂ inch metal dome) + DCW™
Amplifier power per channel	250 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	452 x 287 x 278 mm, 17 ²⁵ / ₃₂ x 11 ⁵ / ₁₆ x 10 ¹⁵ / ₁₆ inch, with Iso-Pod™
Weight	14.3 kg / 31.5 lb
Connectors	1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output, 2 x RJ45 GLM Network

8361A	
Maximum sound pressure level¹	118 dB
Free field frequency response	30 Hz - 43 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (36 Hz - 20 kHz)
Drivers	2 x oval Bass (137 x 263 mm, 5 ¹³ / ₃₂ x 10 ¹¹ / ₃₂ inch) + Coaxial Midrange (130 mm, 5 ¹ / ₈ inch) + Treble MDC™ (25 mm, ³¹ / ₃₂ inch metal dome) + DCW™
Amplifier power per channel	700 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	593 x 357 x 347 mm, 23 ³ / ₈ x 14 x 13 ⁵ / ₈ inch, with Iso-Pod™
Weight	31.9 kg / 70.3 lb
Connectors	2 x RJ45 GLM Network, 1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output

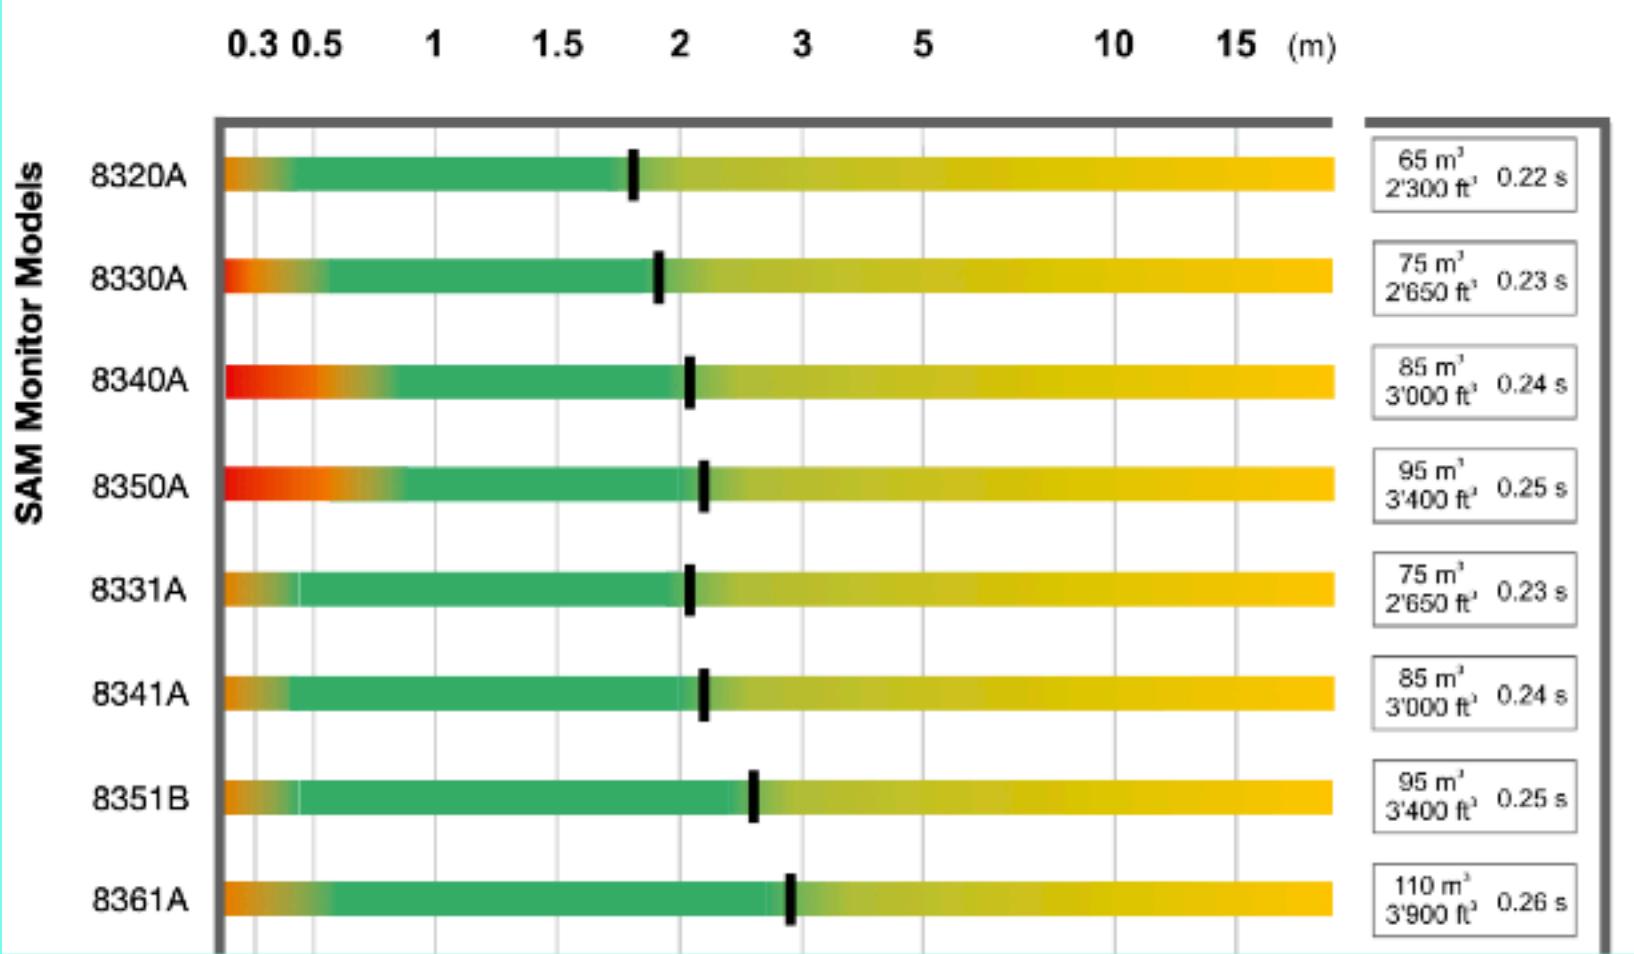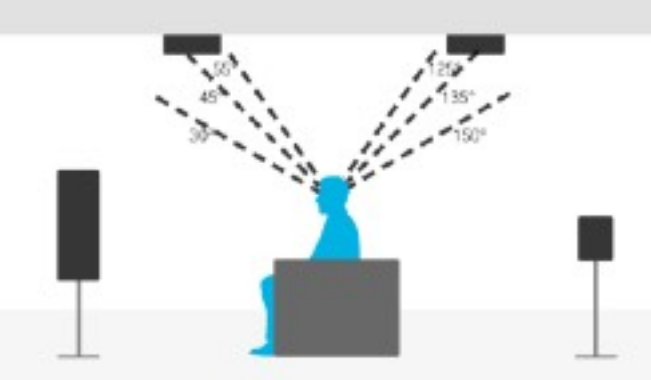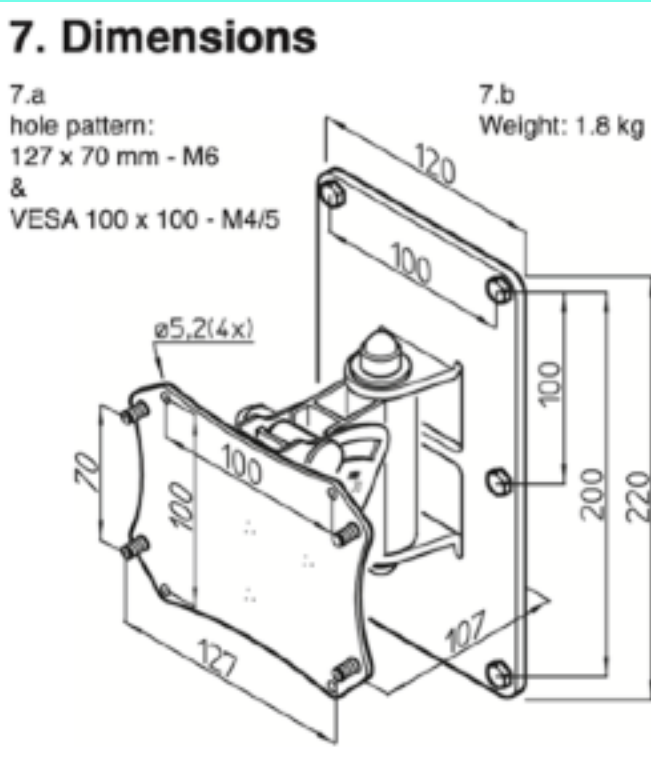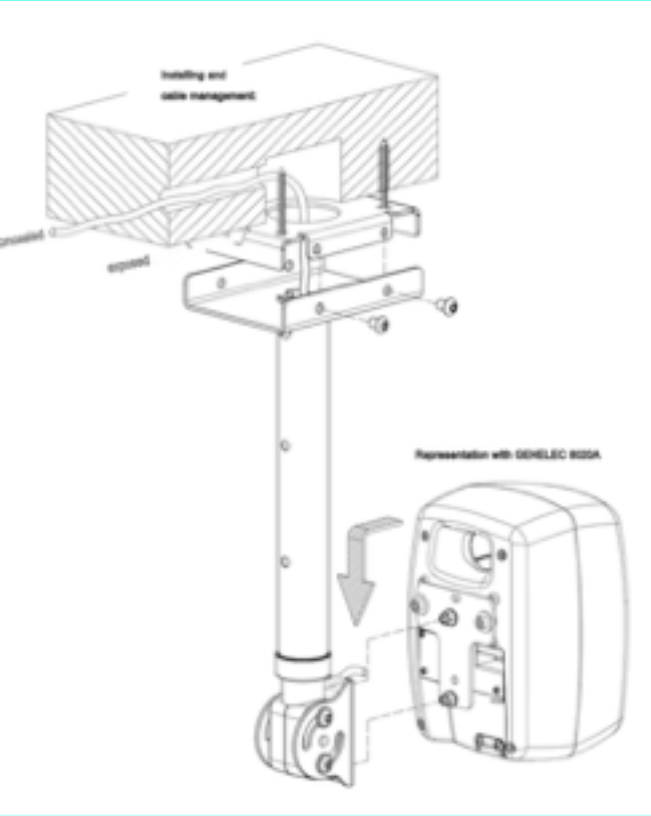

SCM50ASL (Active)

Drivers: HF 25mm Mid 75mm LF 234mm Super Linear
Amplitude Linearity ±2dB: 70Hz – 20kHz
Frequency Response -6dB: 38Hz & 25kHz
Matched Response: ±0.5dB
Dispersion: ±80° Coherent Horizontal ±10° Coherent Vertical
Max continuous SPL @1m: 112dB SPL
Crossover Frequency: 380Hz & 3.5kHz
Input Connector: XLR
Input Sensitivity:1V
Input Impedance: >10k ohms balanced XLR
Amplifier Output: HF 50 Watts RMS MF 100 Watts RMS LF 200 Watts RMS
Overload Protection: Active FET momentary gain reduction (amplifiers)
Power Requirements: Voltage: 100, 115, 230 (factory set)
Frequency: 50/60Hz
Power: Nominal 90 Watts, Driven 350 Watts
Accessories Inc. (per pair): 2 x Speaker Stands (as shown), 2 x fabric wrapped grills, 8 x M8 x 1.25mm stand spikes and nuts.
Cabinet Dimensions(HxWxD): 717 x 304 x 480mm / 28.23 x 11.97 x 18.89” including amps (stands add 250mm to height)
Weight: 48.9kg