

影音设备-其它





2030 年前不会购入， 只需留好管线. 如果能考虑与装潢整合则更好, 另外使用何种声学材料需与厂商对接后再确定

优先考虑 8361(白)， 如果没有再考虑 ATC SCM50

8341A	
Maximum sound pressure level¹	110 dB
Free field frequency response	38 Hz - 37 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (45 Hz - 20 kHz)
Drivers	2 x oval Bass (90 x 170 mm, 3 ¹¹ / ₃₂ x 6 ¹¹ / ₁₆ inch) + Coaxial Midrange (90 mm, 3 ¹⁷ / ₃₂ inch) + Treble MDC™ (19 mm, 3/4 inch metal dome) + DCW™
Amplifier power per channel	250 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	370 x 237 x 243 mm, 14 ⁹ / ₁₆ x 9 ¹¹ / ₃₂ x 9 ⁹ / ₁₆ inch, with Iso-Pod™
Weight	9.8 kg / 21.6 lb
Connectors	1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output, 2 x RJ45 GLM Network

8351B	
Maximum sound pressure level¹	113 dB
Free field frequency response	32 Hz - 43 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (38 Hz - 20 kHz)
Drivers	2 x oval Bass (101 x 218 mm, 3 ³¹ / ₃₂ x 8 ¹⁹ / ₃₂ inch) + Coaxial Midrange (130 mm, 5 ¹ / ₈ inch) + Treble MDC™ (25 mm, ³¹ / ₃₂ inch metal dome) + DCW™
Amplifier power per channel	250 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	452 x 287 x 278 mm, 17 ²⁵ / ₃₂ x 11 ⁵ / ₁₆ x 10 ¹⁵ / ₁₆ inch, with Iso-Pod™
Weight	14.3 kg / 31.5 lb
Connectors	1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output, 2 x RJ45 GLM Network

8361A	
Maximum sound pressure level¹	118 dB
Free field frequency response	30 Hz - 43 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (36 Hz - 20 kHz)
Drivers	2 x oval Bass (137 x 263 mm, 5 ¹³ / ₃₂ x 10 ¹¹ / ₃₂ inch) + Coaxial Midrange (130 mm, 5 ¹ / ₈ inch) + Treble MDC™ (25 mm, ³¹ / ₃₂ inch metal dome) + DCW™
Amplifier power per channel	700 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	593 x 357 x 347 mm, 23 ³ / ₈ x 14 x 13 ⁵ / ₈ inch, with Iso-Pod™
Weight	31.9 kg / 70.3 lb
Connectors	2 x RJ45 GLM Network, 1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output

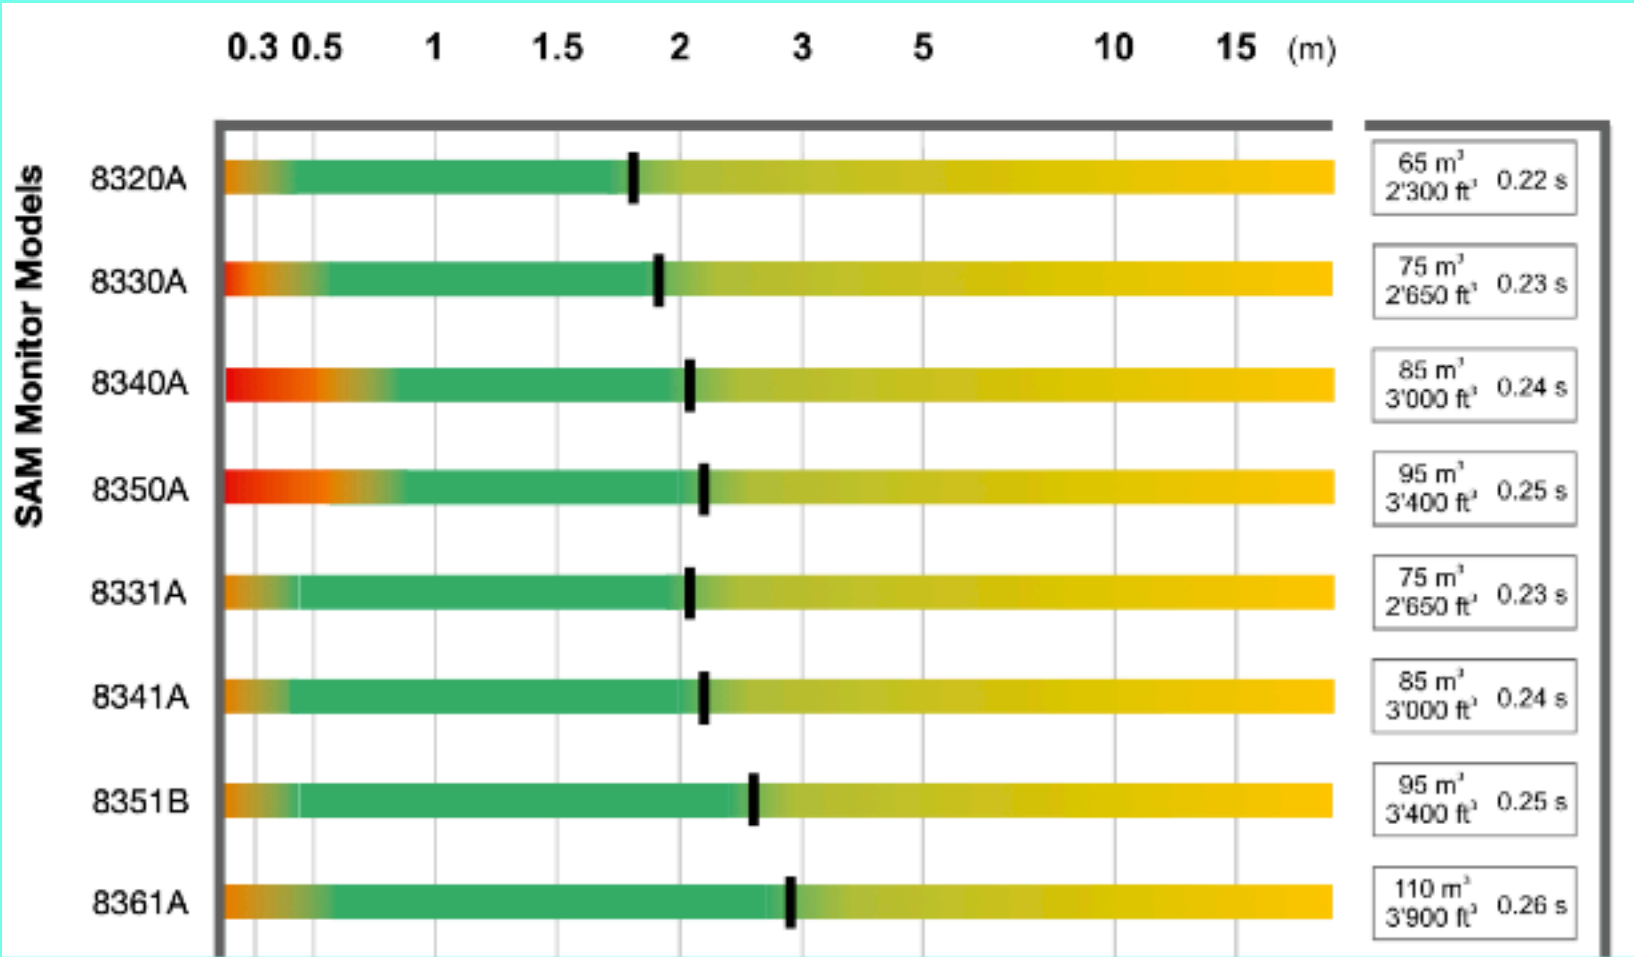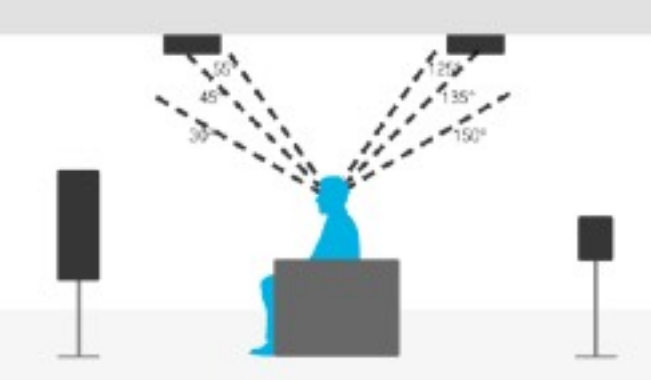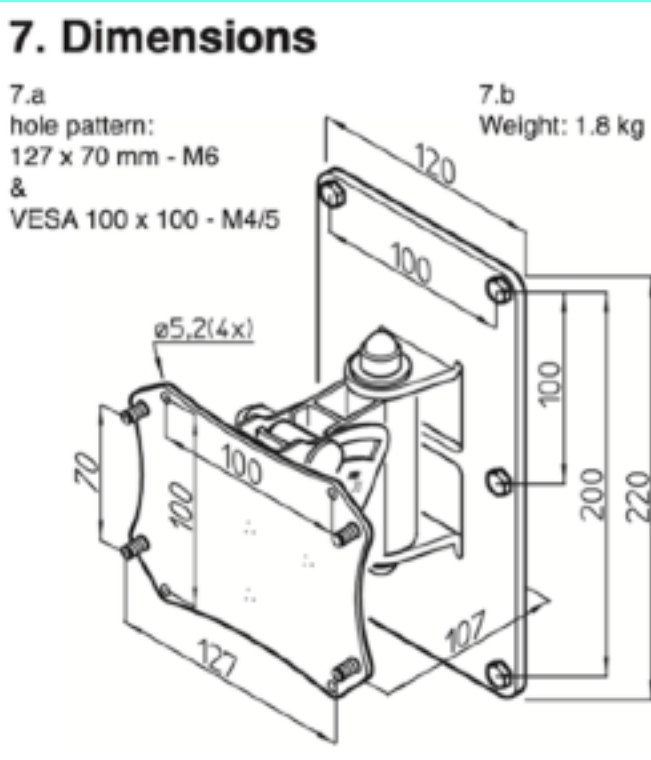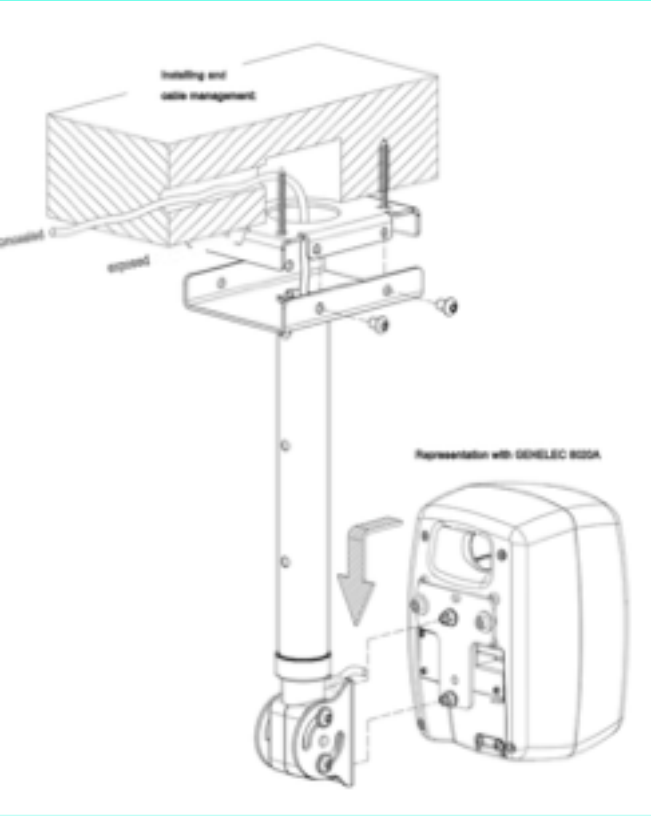


SCM50ASL (Active)

Drivers: HF 25mm Mid 75mm LF 234mm Super Linear
Amplitude Linearity ±2dB: 70Hz – 20kHz
Frequency Response -6dB: 38Hz & 25kHz
Matched Response: ±0.5dB
Dispersion: ±80° Coherent Horizontal ±10° Coherent Vertical
Max continuous SPL @1m: 112dB SPL
Crossover Frequency: 380Hz & 3.5kHz
Input Connector: XLR
Input Sensitivity:1V
Input Impedance: >10k ohms balanced XLR
Amplifier Output: HF 50 Watts RMS MF 100 Watts RMS LF 200 Watts RMS
Overload Protection: Active FET momentary gain reduction (amplifiers)
Power Requirements: Voltage: 100, 115, 230 (factory set)
Frequency: 50/60Hz
Power: Nominal 90 Watts, Driven 350 Watts
Accessories Inc. (per pair): 2 x Speaker Stands (as shown), 2 x fabric wrapped grills, 8 x M8 x 1.25mm stand spikes and nuts.
Cabinet Dimensions(HxWxD): 717 x 304 x 480mm / 28.23 x 11.97 x 18.89” including amps (stands add 250mm to height)
Weight: 48.9kg

影音设备 (声学装修)

2030 年前不会购入，只需留好管线. 如果能考虑与装潢整合则更好, 另外使用何种声学材料需与厂商对接后再确定

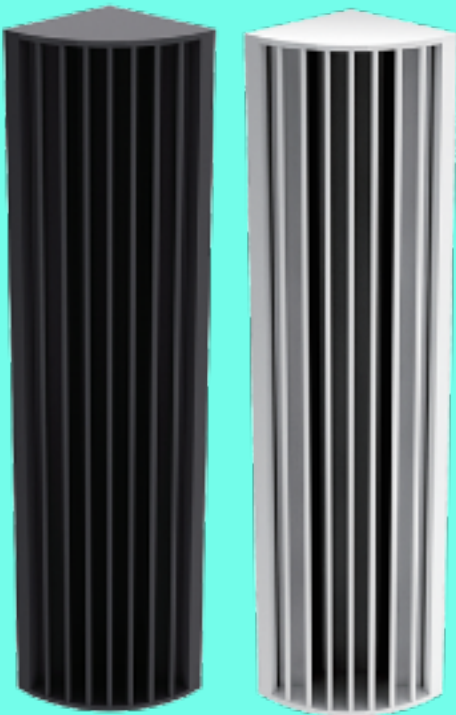

D80W 低频陷阱扩散体 Trapfuser

基材：橡胶实木

饰面：E0环保PU饰面漆

特点：D80W深层次理解角位驻波解决方案，融合了低频吸收与扩散技术与一身，不仅解决了角位驻波困扰，有利于这一特殊的位置，为小空间增强至少3dB声能量。

规格：H1800 * W350 * D350mm ≤31.5kg/个 (有H 120, 可以放在东北角的柜子上)



最初只会购买两声道, 一开始不会购入电视. 只需预留管线就好



EQ50T 调谐板 Walleasear

基材：纯天然环保纤维复合声学棉 / 专利型材防氧化框体

饰面：饰面织物选择声学特性优良的混合布料

特点：密闭式框体包裹三层非对等密度复合基材，成型准封闭式宽频吸收声学空腔

环保：零排放符合国际E0环保标准

规格：H1800 * W300 * D50mm ≤2.8kg/m² (有H 120, 可以放在东北角的柜子上)

安装：防共震铝质易安装件



N29 平面扩散体 Fuseaser

基材：橡胶实木饰面：E0环保PU饰面漆

特点：N29二次余数扩散体采用橡胶硬木制作，密度高达0.71(t/m)

不仅材质机能稳定，有效满足宽幅N29低频设计基材指标，宽频

QRD扩散良好还原声音空间感和提 升厅堂音质饱满度、清晰度及立体感。

规格：H1800 * W540 * D158mm ≤62.2Kg/个

