

书房/影音室 - 12ab - 2030 年前不会购入书房音响与电视

房间宽 3.8m, 长 5.5m, 柜子高度可以介于 114~138cm (听音距离 2.6m, 俯仰角 10 到 15 度)

距离\俯仰角	5	10	15	人耳高度 (cm)	95
240	89.80	111.12	133.11	音箱总高 (cm)	57
250	90.67	112.88	135.79	音箱架高(cm)	2.3
260	91.55	114.65	138.47	音箱底部高度	68.8
270	92.42	116.41	141.15		




真力 (Genelec) 8331A 8341A 8351B 8361A 三分频同轴有源监听音箱 8361A 砂岩灰【一对】


¥84726.94

到手价


¥87730

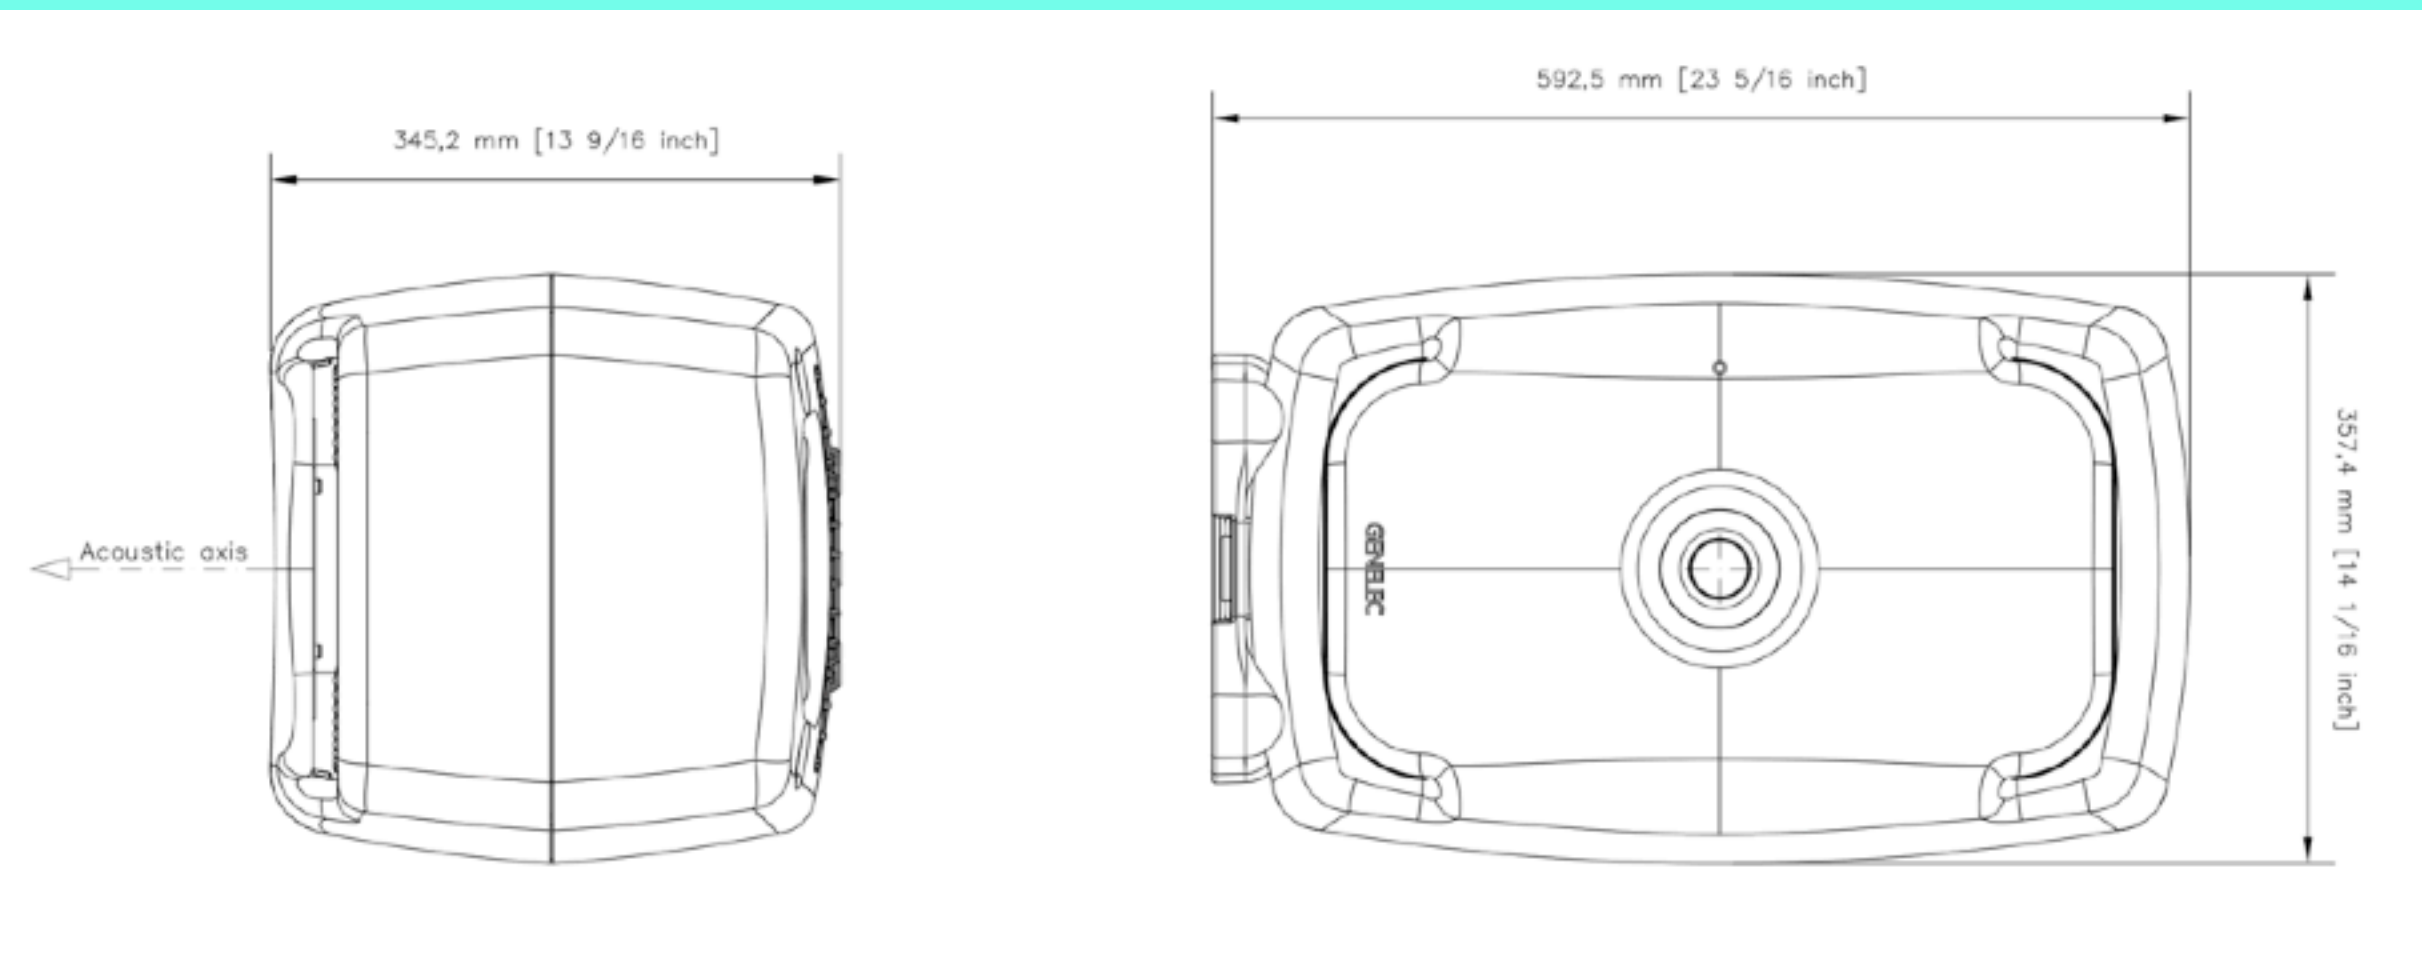



8341A	
Maximum sound pressure level ¹	110 dB
Free field frequency response	38 Hz - 37 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (45 Hz - 20 kHz)
Drivers	2 x oval Bass (90 x 170 mm, 3 ¹⁷ / ₃₂ x 6 ¹¹ / ₁₆ inch) + Coaxial Midrange (90 mm, 3 ¹⁷ / ₃₂ inch) + Treble MDC™ (19 mm, 3/4 inch metal dome) + DCW™
Amplifier power per channel	250 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	370 x 237 x 243 mm, 14 ⁹ / ₁₆ x 9 ¹¹ / ₃₂ x 9 ⁹ / ₁₆ inch, with Iso-Pod™
Weight	9.8 kg / 21.6 lb
Connectors	1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output, 2 x RJ45 GLM Network

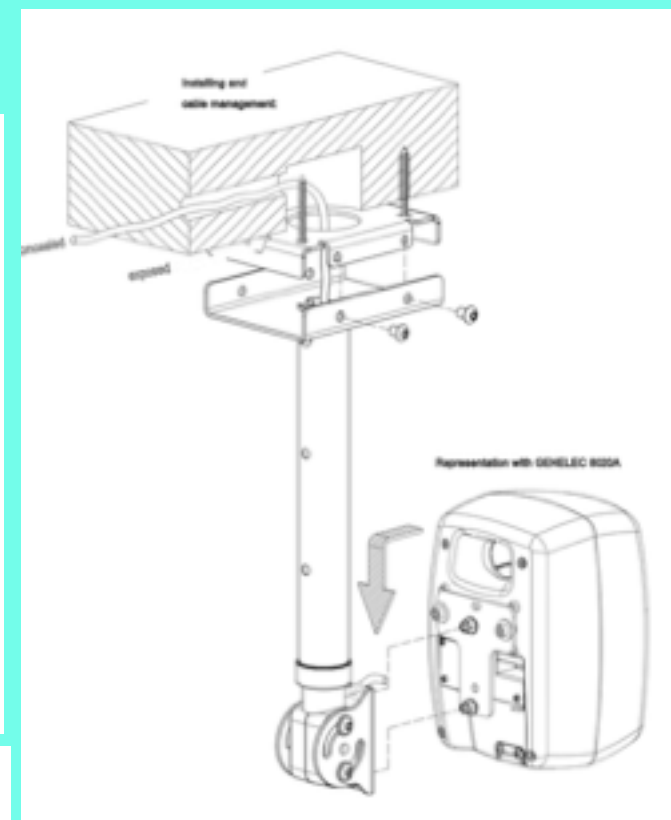

8351B	
Maximum sound pressure level ¹	113 dB
Free field frequency response	32 Hz - 43 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (38 Hz - 20 kHz)
Drivers	2 x oval Bass (101 x 218 mm, 3 ³¹ / ₃₂ x 8 ¹⁹ / ₃₂ inch) + Coaxial Midrange (130 mm, 5 ¹ / ₈ inch) + Treble MDC™ (25 mm, 3 ¹ / ₃₂ inch metal dome) + DCW™
Amplifier power per channel	250 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	452 x 287 x 278 mm, 17 ²⁵ / ₃₂ x 11 ⁵ / ₁₆ x 10 ¹⁵ / ₁₆ inch, with Iso-Pod™
Weight	14.3 kg / 31.5 lb
Connectors	1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output, 2 x RJ45 GLM Network

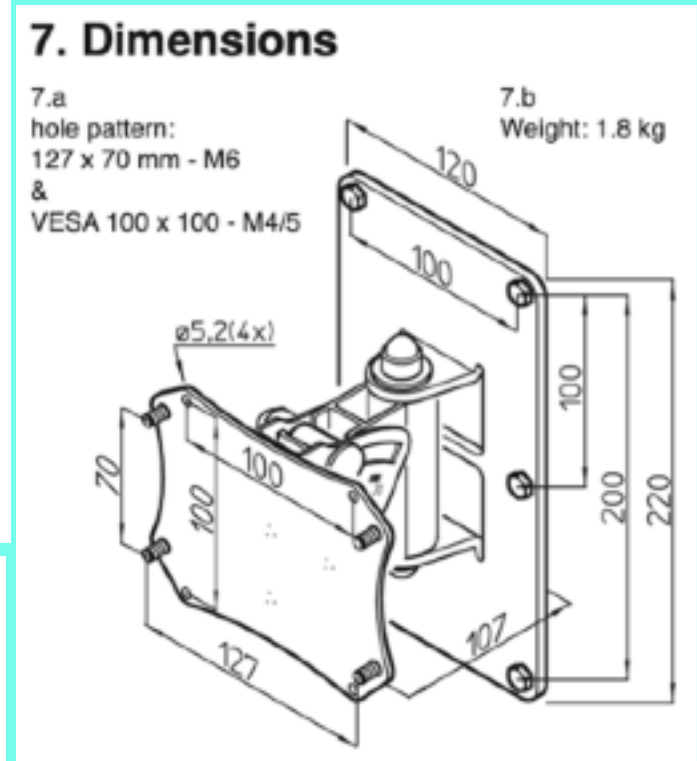

8361A	
Maximum sound pressure level ¹	118 dB
Free field frequency response	30 Hz - 43 kHz (-6 dB)
Accuracy of frequency response	± 1.5 dB (36 Hz - 20 kHz)
Drivers	2 x oval Bass (137 x 263 mm, 5 ¹³ / ₃₂ x 10 ¹¹ / ₃₂ inch) + Coaxial Midrange (130 mm, 5 ¹ / ₈ inch) + Treble MDC™ (25 mm, 3 ¹ / ₃₂ inch metal dome) + DCW™
Amplifier power per channel	700 W Bass + 150 W Midrange + 150 W Treble (all Class D)
Dimensions H x W x D	593 x 357 x 347 mm, 23 ³ / ₈ x 14 x 13 ⁵ / ₈ inch, with Iso-Pod™
Weight	31.9 kg / 70.3 lb
Connectors	2 x RJ45 GLM Network, 1 x XLR Analogue Input, 1 x XLR AES/EBU Input, 1 x XLR AES/EBU Output

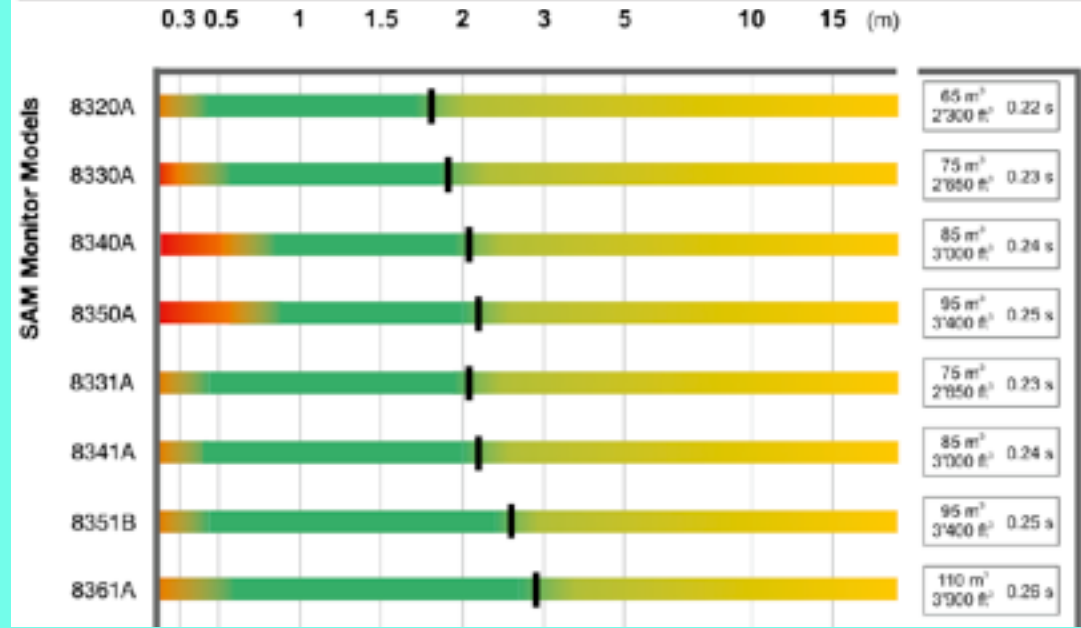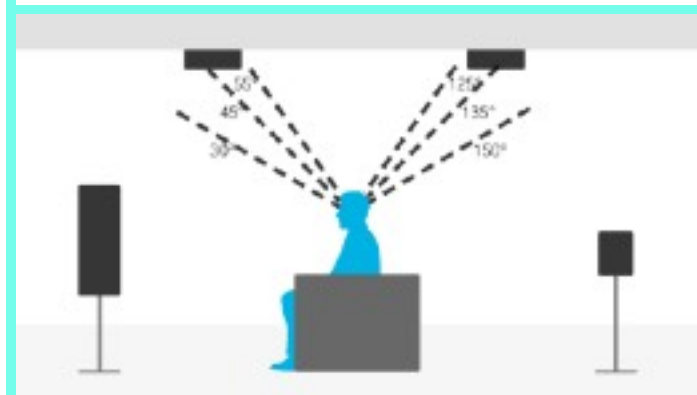


最初只会购买两声道. 另外最终也很有可能不会安装多声道. 如果能预留管道. 先预留

影音设备 (声学装修)

2030 年前不会购入，只需留好管线. 如果能考虑与装潢整合则更好, 另外使用何种声学材料需与厂商对接后再确定

最初只会购买两声道, 一开始不会购入电视. 只需预留管线就好

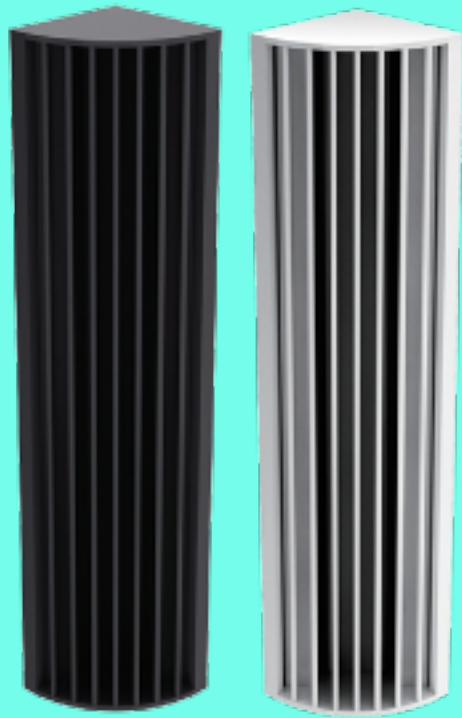

D80W 低频陷阱扩散体 Trapfuser

基材：橡胶实木

饰面：E0环保PU饰面漆

特点：D80W深层次理解角位驻波解决方案，融合了低频吸收与扩散技术与一身，不仅解决了角位驻波困扰，有利于这一特殊的位置，为小空间增强至少3dB声能量。

规格：H1800 * W350 * D350mm ≤31.5kg/个 (有H 120, 可以放在东北角的柜子上)



EQ50T 调谐板 Walleasear

基材：纯天然环保纤维复合声学棉 / 专利型材抗氧化框体


饰面：饰面织物选择声学特性优良的混合布料

特点：密闭式框体包裹三层非对等密度复合基材，成型准封闭式宽频吸收声学空腔

环保：零排放符合国际E0环保标准

规格：H1800 * W300 * D50mm ≤2.8kg/m² (有H 120, 可以放在东北角的柜子上)

安装：防共震铝质易安装件

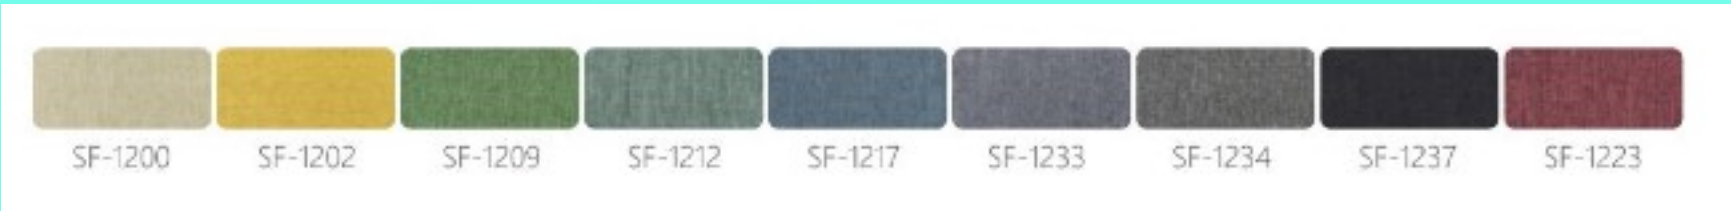

N29 平面扩散体 Fuseaser

基材：橡胶实木饰面：E0环保PU饰面漆

特点：N29二次余数扩散体采用橡胶硬木制作，密度高达0.71(t/m)

不仅材质机能稳定，有效满足宽幅N29低频设计基材指标，宽频

QRD扩散良好还原声音空间感和提 升厅堂音质饱满度、清晰度及立体感。

规格：H1800 * W540 * D158mm ≤62.2Kg/个

