

MOONPO DEVELOPMENT LIMITED

Sample Evaluation Report

SER NO 094101

REV 0

FINAL SER FILE

REMARKS

SUBMISSION SECTION

P/N:	100-22017-01-00	DESCRIPTION	PCB MAIN L1 FR1 1.6 OSP 25x46 BOP
VENDOR CODE	1S462D	IT	
MFG PN	/	SUPPLIER	ZHAO HONG MEI WEI
CUSTOMER PN		MANUFACTURER	ZHAO HONG MEI WEI
NET WEIGHT(G)	2 . 51	MODEL	BOP IT
SAMPLE QTY(pcs)	3	DOMAIN	VN
SUBMITTED BY	kitty	TOOLINGPART	N
DATE	2022-09-20	PLC REV	00
REASON	NewPart	MOLD NO	
		CAVITY	

REPORT SECTION

RESULT

FULL APPROVAL

. Material meets Rohs 2.0 and REACH Requirement

SUMMARY

- [1] Layer : L1
- [2] Material : FR1
- [3] Finishing : OSP
- [4] Size : 25mm x 46mm
- [5] Thickness : 1.6mm
- [6] Solder mask : Green
- [7] Silkscreen : White
- [8] Panel:12PCS

PREPARED FWU;2022-09-20

PROJECT APPROVED GZXie;2022-10-10

REVIEWED DQWu;2022-10-10

SUPPORT APPROVED RomanLaw;2022-10-10

此文件以电子文件确认，故不会在文件上签名确认，
此乃电子文件在公司网页上是唯一受控的文件，打印出来的不被视为受控文件。

Engineering Evaluation Data Sheet

PART#	100-22017-01-00				PART# Rev(Plastic Only)	00					
A:GENERAL DATA											
No.	Description	Specification	Actual	Result	Remarks						
1	Material	FR1	FR1	A							
2	Layer	L1	L1	A							
3	Finishing	OSP	OSP	A							
4	Solder mask Color	Green	Green	A							
5	Silkscreen Color	White	White	A							
6	Panel	12PCS	12PCS	A							
B:SPECIAL DATA											
Code(Dimension)		1	2	3	4	5	6	7	8	9	10
Parameter(Other)				T							
Specification	SPEC.	25	46	1.6							
	Tolerance+/-	0.2	0.2	0.15							
	Unit	mm	mm	mm							
	TestCondition /Equipment	40837	40837	40837							
Measuring date	Sample 1	25.00	46.00	1.62							
	Sample 2	25.00	46.00	1.58							
	Sample 3	25.00	46.00	1.63							
	Sample 4										
	Sample 5										
	Sample 6										
	Sample 7										
	Sample 8										
	Sample 9										
	Sample 10										
Average		25.00	46.00	1.61	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
Result		A	A	A							
Max Acc. Range											
C:OVERALL RESULT											
Overall Result		A									

REMARK :

1. Type of result :

A = Accepted. Within specification.

FA = Functional Accepted. Out specification, "Max. Acceptable Range" needed to be specified to indicate the functional acceptable range. IQC please follow this range for incoming inspection.









R = Rejected.Out specification.


Evaluated By : FWU


Date: 2022/10/10


ENG0019b


Symbol	Count	Hole Size	Plated	Hole Type
⊛	2	1.400mm (55.12mil)	NPTH	Round
○	2	1.700mm (66.93mil)	NPTH	Round
▽	2	2.400mm (94.49mil)	NPTH	Round
□	12	0.800mm (31.50mil)	PTH	Round
18 Total				

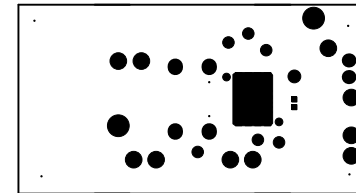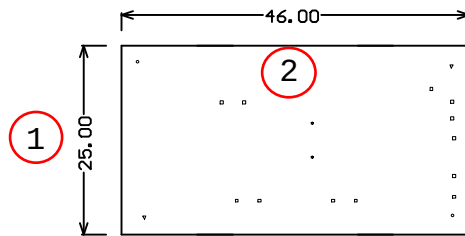


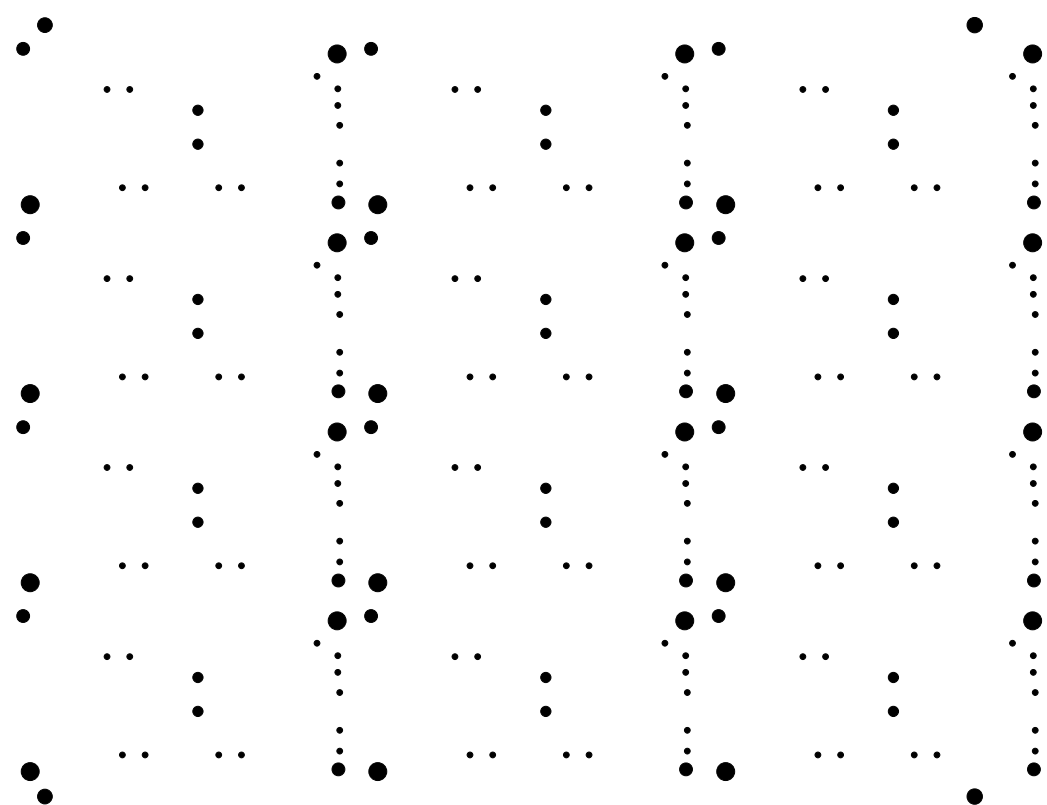

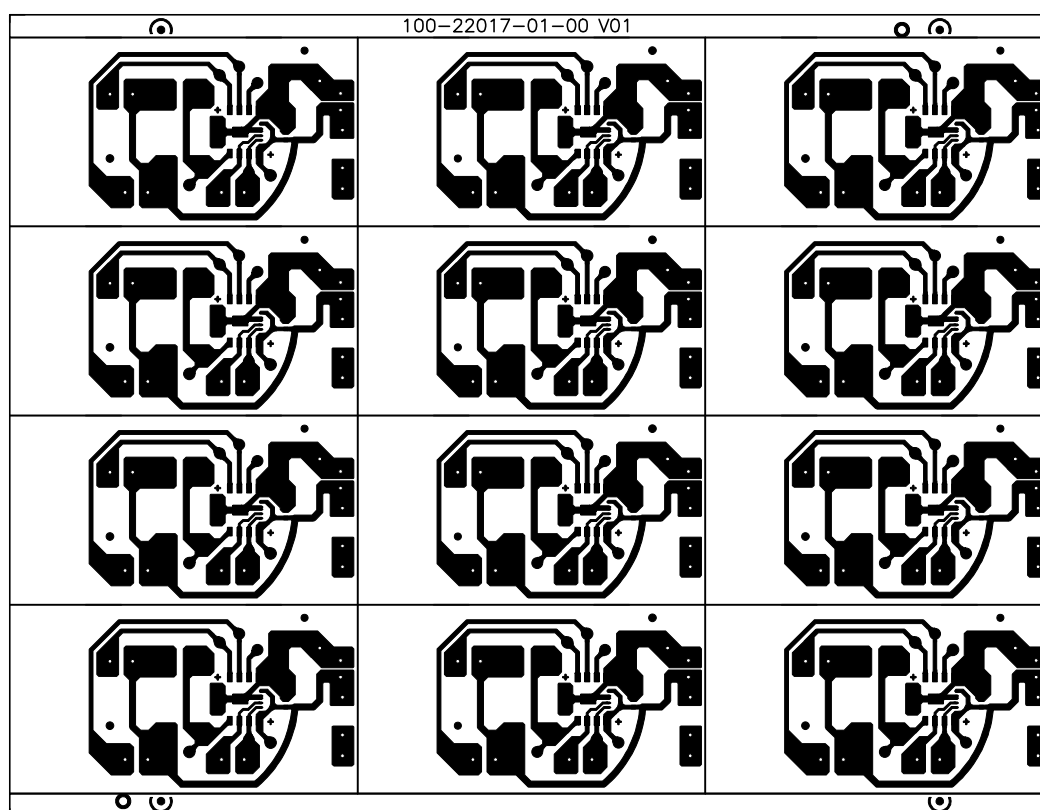


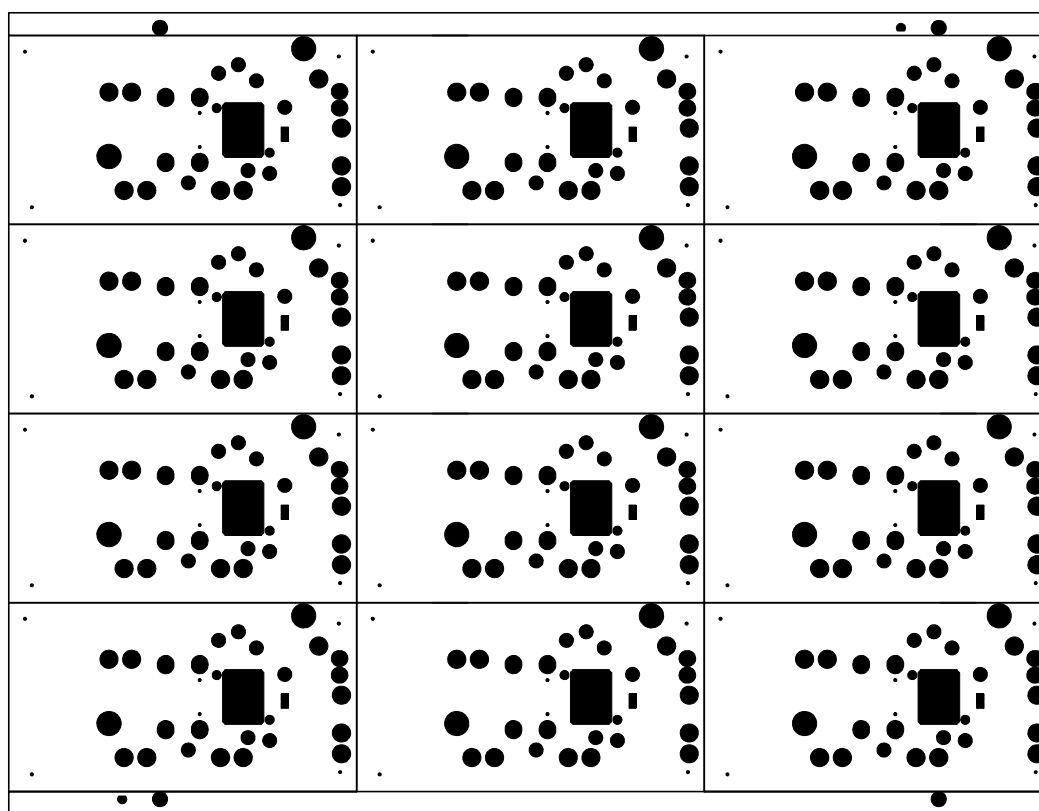

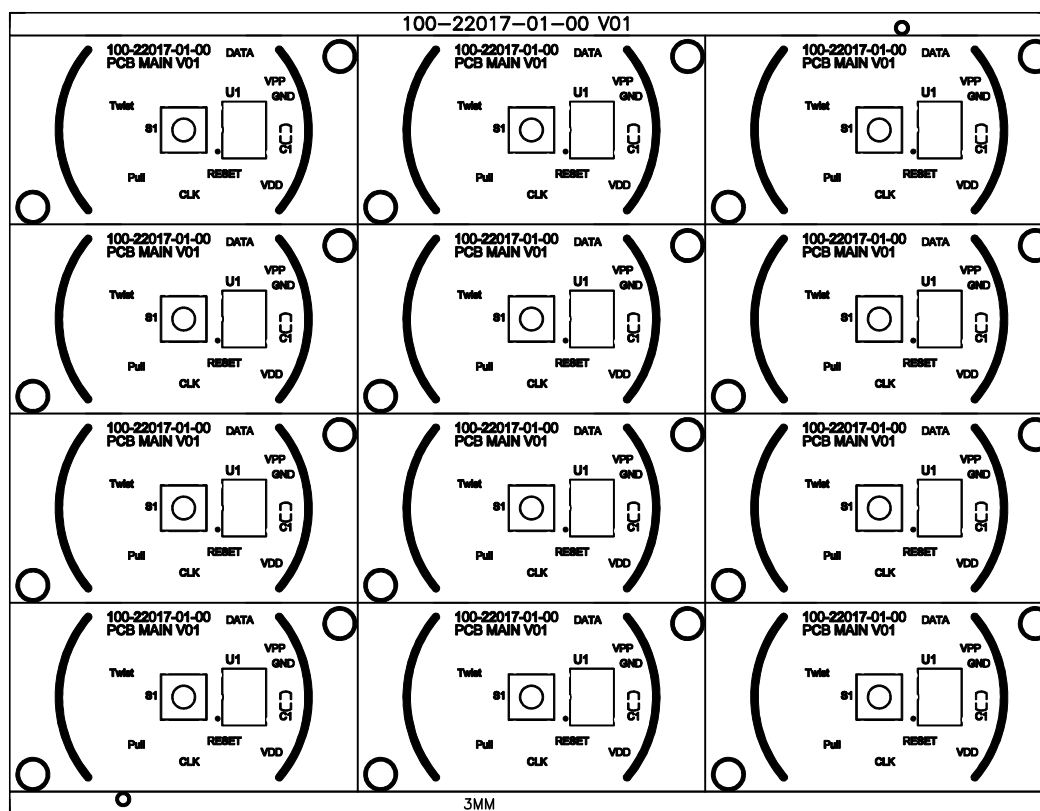

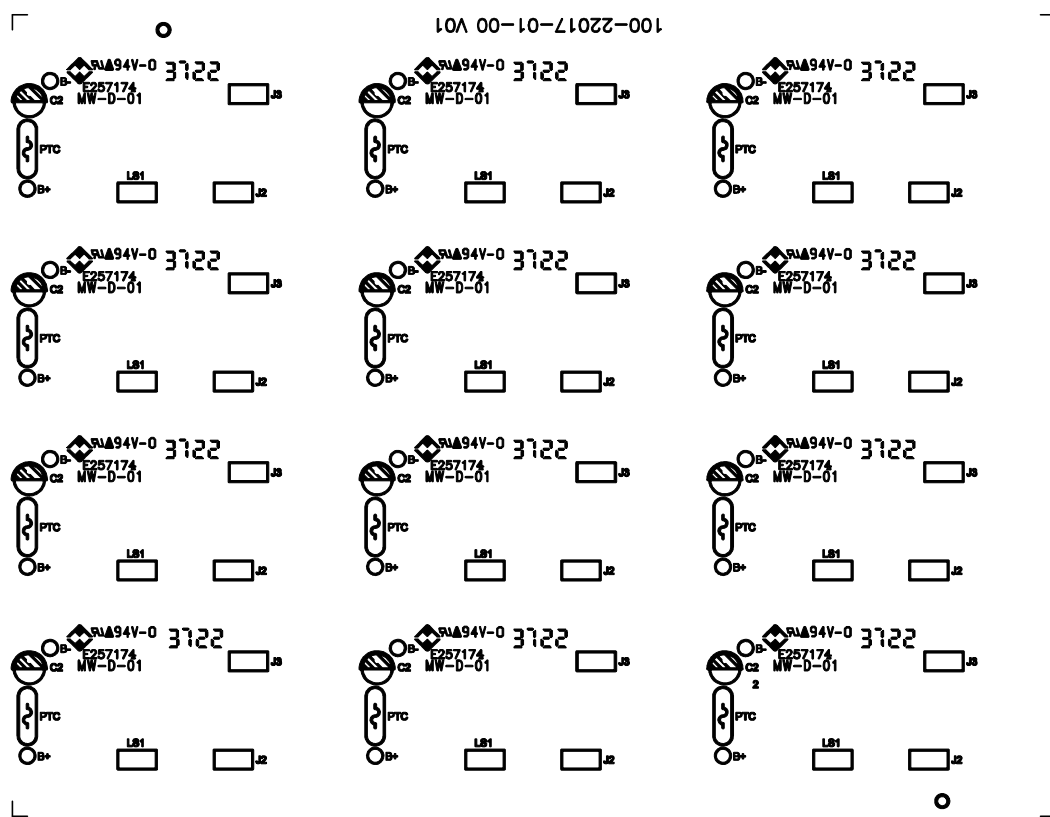

			o
o			

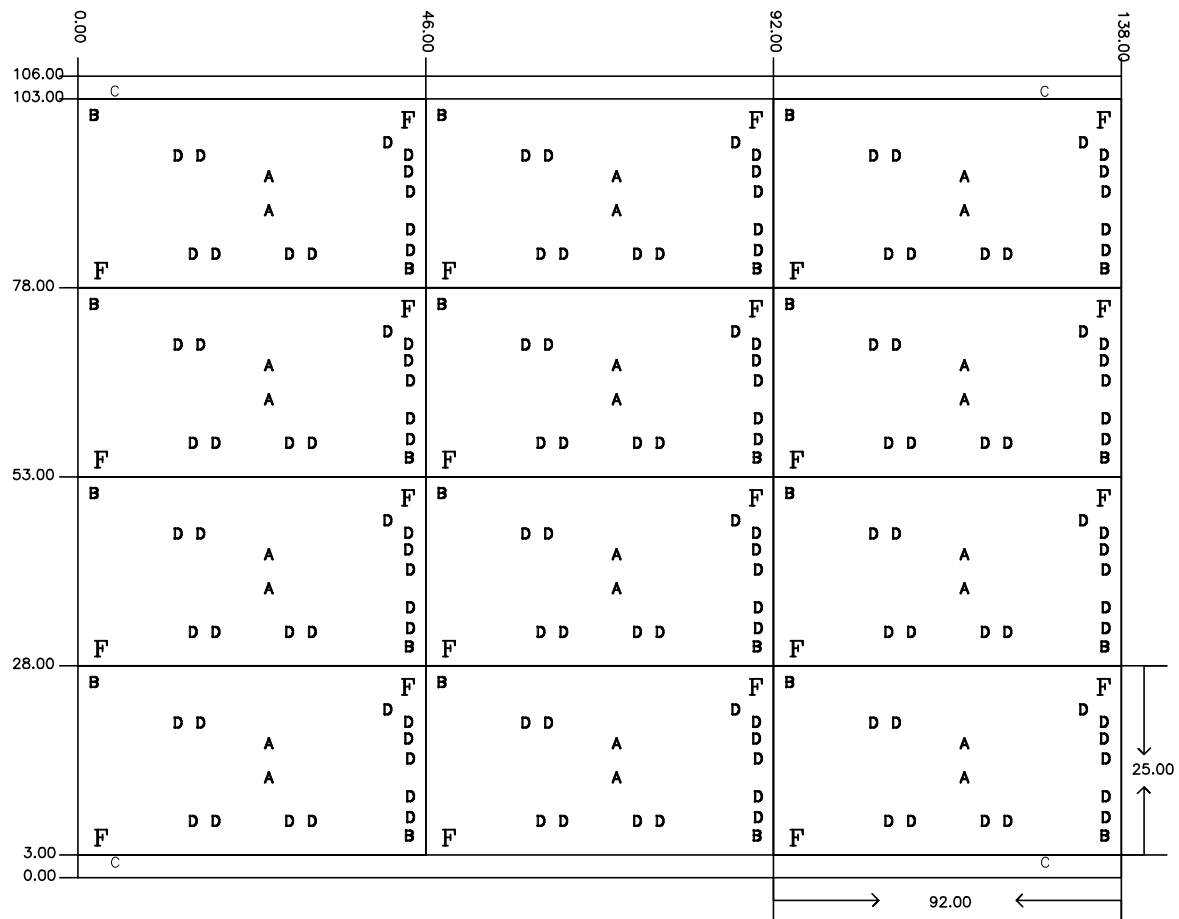

DRILL CHART			
Pth	Size(MM)	Count	Legend
y	0.80	144	D
y	1.40	24	A
y	1.70	24	B
y	2.00	4	c
y	2.40	24	F