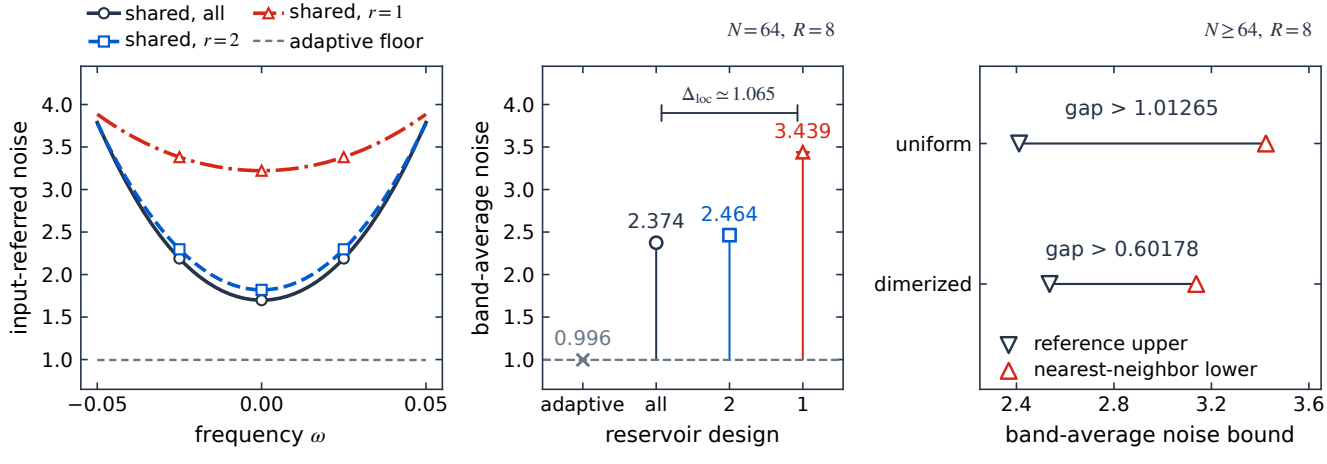
shared, all
shared, r = 1
shared, r = 2
adaptive floor
input-referred noise
4.0
3.5
3.0
2.5
2.0
1.5
1.0
−0.05
0.00
0.05
frequency ω
(a)
N = 64, R = 8
band-average noise
Δloc ≃ 1.065
3.439
2.374
2.464
0.996
adaptive
all
2
1
reservoir design
(b)
N ≥ 64, R = 8
gap > 1.01265
uniform
gap > 0.60178
dimerized
reference upper
nearest-neighbor lower
2.4
2.8
3.2
3.6
band-average noise bound
(c)