

# TPS82740x 360nA $I_Q$ MicroSiP™ Step Down Converter Module for Low Power Applications

## 1 Features

- 360nA Typical Quiescent Current
- Up to 90% Efficiency at 10 $\mu$ A Output Current
- Pin Selectable Output Voltages in 100mV Steps
- Integrated Slew Rate Controlled Load Switch
- Up to 200mA Output Current
- Input Voltage Range  $V_{IN}$  from 2.2V to 5.5V
- RF Friendly DCS-Control™
- Low Output Voltage Ripple
- Automatic Transition to No Ripple 100% Mode
- Discharge Function on  $V_{OUT}$  and LOAD
- Sub 1.1-mm Profile Solution
- Total Solution Size <6.7mm<sup>2</sup>
- Small 2.3 mm x 2.9 mm MicroSiP™ Package


## 2 Applications

- Bluetooth® Low Energy, RF4CE, Zigbee
- Wearable Electronics
- Energy Harvesting

## 3 Description

The TPS82740 is the industry's first step down converter module featuring typically 360nA quiescent current consumption. It is a complete MicroSiP™ DC/DC step-down power solution intended for ultra low-power applications. The module includes the switching regulator, inductor and input/output capacitors. The integration of all required passive components enables a tiny solution size of only 6.7mm<sup>2</sup>.

## 4 Typical Application

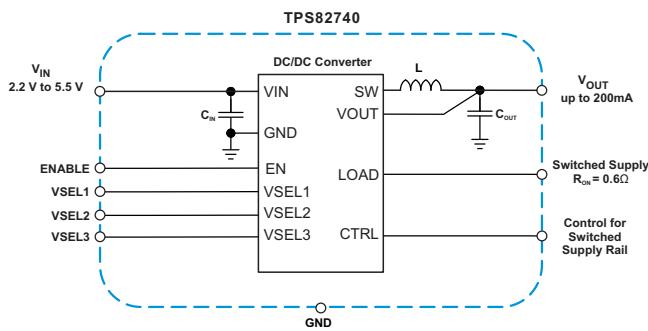

This new DCS-Control™ based device extends the light load efficiency range below 10 $\mu$ A load currents. It supports output currents up to 200mA.

The device operates from rechargeable Li-Ion batteries, Li-primary battery chemistries such as Li-SOCl<sub>2</sub>, Li-MnO<sub>2</sub> and two or three cell alkaline batteries. The input voltage range up to 5.5V also allows operation from an USB port and thin-film solar modules.

The output voltage is user selectable by three voltage select pins (VSEL), within a range from 1.8V to 2.5V (TPS82740A) and 2.6V to 3.3V (TPS82740B) in 100mV steps. The TPS82740 features low output voltage ripple and low noise. Once the battery voltage comes close to the output voltage (close to 100% duty cycle), the device enters no ripple 100% mode operation preventing an increase of output voltage ripple. In this case the device stops switching and the output is connected to the input voltage.


The integrated slew rate controlled load switch with a typical ON-resistance of 0.6 $\Omega$  distributes the selected output voltage to a temporarily used sub-system.

The TPS82740 is available in a small 9 bump 6.7mm<sup>2</sup> MicroSiP™ package.

### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS82740A	µSIP	2.30 mm × 2.90 mm
TPS82740B	µSIP	2.30 mm × 2.90 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

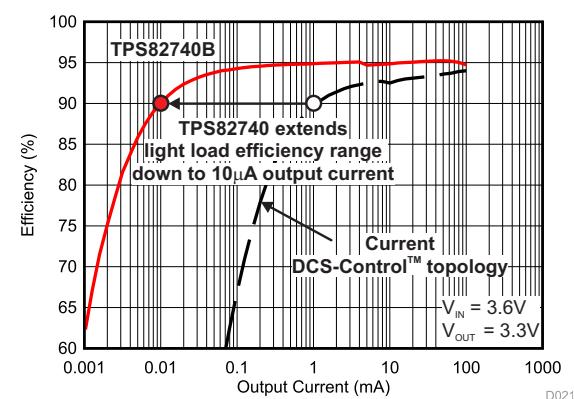

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

## Table of Contents

<b>1 Features .....</b>	<b>1</b>	
<b>2 Applications .....</b>	<b>1</b>	
<b>3 Description .....</b>	<b>1</b>	
<b>4 Typical Application .....</b>	<b>1</b>	
<b>5 Revision History.....</b>	<b>2</b>	
<b>6 Device Comparison Table.....</b>	<b>3</b>	
<b>7 Pin Configuration and Functions .....</b>	<b>3</b>	
<b>8 Specifications.....</b>	<b>4</b>	
8.1 Absolute Maximum Ratings .....	4	
8.2 Handling Ratings .....	4	
8.3 Recommended Operating Conditions.....	4	
8.4 Thermal Information .....	5	
8.5 Electrical Characteristics.....	5	
8.6 Typical Characteristics .....	6	
<b>9 Parameter Measurement Information .....</b>	<b>14</b>	
<b>10 Detailed Description .....</b>	<b>15</b>	
10.1 Overview .....	15	
10.2 Functional Block Diagram .....	15	
10.3 Feature Description.....	15	
10.4 Device Functional Modes.....	16	
<b>11 Application and Implementation.....</b>	<b>18</b>	
11.1 Application Information.....	18	
11.2 Typical Application .....	18	
<b>12 Power Supply Recommendations .....</b>	<b>20</b>	
<b>13 Layout.....</b>	<b>20</b>	
13.1 Layout Guidelines .....	20	
13.2 Layout Example .....	20	
13.3 Surface Mount Information.....	21	
<b>14 Device and Documentation Support .....</b>	<b>22</b>	
14.1 Documentation Support .....	22	
14.2 Trademarks .....	22	
14.3 Electrostatic Discharge Caution .....	22	
14.4 Glossary .....	22	
<b>15 Mechanical, Packaging, and Orderable Information .....</b>	<b>22</b>	


## 5 Revision History

Changes from Original (June 2014) to Revision A	Page
• Added 150 mA Typical current specification for $I_{LIM\_softstart}$ , Low side MOSFET switch current limit.....	6

## 6 Device Comparison Table

PART NUMBER	OUTPUT VOLTAGE SETTINGS (VSEL1, VSEL2, VSEL3)	PACKAGE MARKING
TPS82740A	1.8V to 2.5V in 100mV steps	E7
TPS82740B	2.6V to 3.3V in 100mV steps	E8

## 7 Pin Configuration and Functions

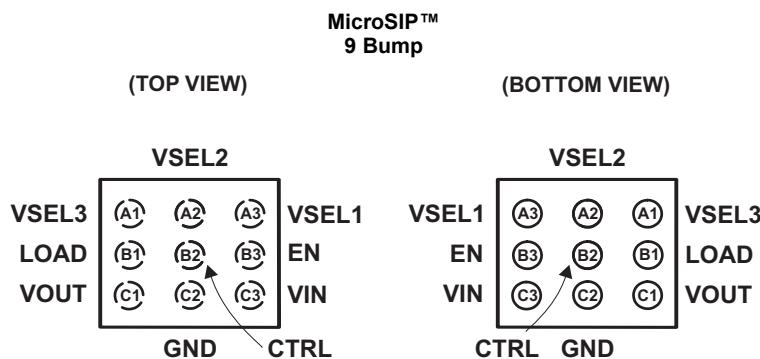

**Table 1. Pin Functions**

PIN		I/O	DESCRIPTION
NAME	NO		
VIN	C3	IN	Input voltage supply pin of the module.
GND	C2	-	Ground terminal.
CTRL	B2	IN	CTRL pin controls the LOAD output pin. With CTRL = low, the LOAD output is disabled. This pin must be terminated and not left floating.
VOUT	C1	OUT	Output voltage pin of the module. An internal load switch is connected between VOUT pin and LOAD pin.
LOAD	B1	OUT	Load switch output pin controlled by the CTRL pin. With CTRL = high, an internal load switch connects the LOAD pin to the VOUT pin. The LOAD pin allows connect / disconnect other system components to the output of the DC/DC converter. This pin is pulled to GND with the CTRL pin = low. The LOAD pin features soft switching. If not used, leave the pin open.
VSEL3	A1	IN	Output voltage selection pins. See <a href="#">Table 2</a> and <a href="#">Table 3</a> for $V_{OUT}$ selection. These pins must be terminated and can be changed during operation.
VSEL2	A2	IN	
VSEL1	A3	IN	
EN	B3	IN	High level enables the devices and low level turns the device into shutdown mode. This pin must be terminated and not left floating.

**Table 2. Output Voltage Setting TPS82740A**

Device	VOUT	VSEL3	VSEL2	VSEL1
TPS82740A	1.8	0	0	0
	1.9	0	0	1
	2.0	0	1	0
	2.1	0	1	1
	2.2	1	0	0
	2.3	1	0	1
	2.4	1	1	0
	2.5	1	1	1

**Table 3. Output Voltage Setting TPS82740B**

Device	VOUT	VSEL3	VSEL2	VSEL1
TPS82740B	2.6	0	0	0
	2.7	0	0	1
	2.8	0	1	0
	2.9	0	1	1
	3.0	1	0	0
	3.1	1	0	1
	3.2	1	1	0
	3.3	1	1	1

## 8 Specifications

### 8.1 Absolute Maximum Ratings<sup>(1)</sup>

Over operating free-air temperature range (unless otherwise noted)

		VALUE		UNIT
		MIN	MAX	
Pin voltage <sup>(2)</sup>	VIN	-0.3	6	V
	EN, CTRL, VSEL1, VSEL2, VSEL3	-0.3	V <sub>IN</sub> +0.3V	V
	VOUT, LOAD	-0.3	3.7	V
Operating ambient temperature range, T <sub>A</sub> <sup>(3)</sup>		-40	85	°C
Operating junction temperature T <sub>J</sub>		-40	125	°C

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal GND.
- (3) In applications where ambient temperature (T<sub>A</sub>) constantly stays above 70°C, the product life time might degrade. MLCC capacitor reliability and lifetime is depending on temperature and applied voltage conditions. At higher temperatures, MLCC capacitors are subject to stronger stress. The most critical parameter is the Insulation Resistance (IR) resulting in leakage current.

### 8.2 Handling Ratings

			MIN	MAX	UNIT
T <sub>stg</sub>	Storage temperature range		-55	125	°C
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	0	2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup>	0	1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. The human body model is a 100-pF capacitor discharged through a 1.5-kΩ resistor into each pin.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V <sub>IN</sub>	Supply voltage V <sub>IN</sub>		2.2	5.5	V	
I <sub>OUT</sub> + I <sub>LOAD</sub>	Device output current (sum of I <sub>OUT</sub> and I <sub>LOAD</sub> )	V <sub>OUTnom</sub> + 0.7V ≤ V <sub>IN</sub> ≤ 5.5V		200	mA	
		V <sub>OUTnom</sub> ≤ V <sub>IN</sub> ≤ V <sub>OUTnom</sub> + 0.7V		100		
I <sub>LOAD</sub>	Load current (current from LOAD pin)			100		
C <sub>OUT</sub>	Additional output capacitance connected to VOUT pin (not including LOAD pin)			10	μF	
C <sub>LOAD</sub>	Capacitance connected to LOAD pin			10		
T <sub>J</sub>	Operating junction temperature range		-40	90	°C	
T <sub>A</sub>	Operating ambient temperature range		-40	85		

## 8.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPS82740	UNIT
		µSIP	
		9 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	83	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	53	
R <sub>θJB</sub>	Junction-to-board thermal resistance	-	
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	-	
Ψ <sub>JB</sub>	Junction-to-board characterization parameter	-	
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	-	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 8.5 Electrical Characteristics

V<sub>IN</sub> = 3.6V, T<sub>A</sub> = -40°C to 85°C, typical values are at T<sub>A</sub> = 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>SUPPLY</b>						
V <sub>IN</sub>	Input voltage range		2.2	5.5		V
I <sub>Q</sub>	Operating quiescent current	EN = V <sub>IN</sub> , CTRL = GND, I <sub>OUT</sub> = 0µA, V <sub>OUT</sub> = 1.8V / 2.6V, device not switching	360	2300		nA
		EN = V <sub>IN</sub> , I <sub>OUT</sub> = 0mA, CTRL = GND, V <sub>OUT</sub> = 1.8V device switching	460			
		EN = V <sub>IN</sub> , I <sub>OUT</sub> = 0mA, CTRL = GND, V <sub>OUT</sub> = 2.6V, device switching	500			
		EN = V <sub>IN</sub> , I <sub>OUT</sub> = 0mA., CTRL = V <sub>IN</sub> , V <sub>OUT</sub> = 1.8V, device not switching	12.5			µA
		EN = V <sub>IN</sub> , I <sub>OUT</sub> = 0mA., CTRL = V <sub>IN</sub> , V <sub>OUT</sub> = 2.6V, device not switching	13.5			
I <sub>SD</sub>	Shutdown current	EN = GND, shutdown current into V <sub>IN</sub>	70			nA
		EN = GND, shutdown current into V <sub>IN</sub> , T <sub>A</sub> = 60°C	150			
V <sub>TH_UVLO+</sub>	Undervoltage lockout threshold	Rising V <sub>IN</sub>	2.075	2.15		V
V <sub>TH_UVLO-</sub>		Falling V <sub>IN</sub>	1.925	2		
<b>INPUTS EN, CTRL, VSEL 1-3</b>						
V <sub>IH TH</sub>	High level input threshold	2.2V ≤ V <sub>IN</sub> ≤ 5.5V		1.1		V
V <sub>IL TH</sub>	Low level input threshold	2.2V ≤ V <sub>IN</sub> ≤ 5.5V		0.4		V
I <sub>IN</sub>	Input bias Current	T <sub>A</sub> = 25°C		10		nA
		T <sub>A</sub> = -40°C to 85°C		25		
<b>POWER SWITCHES</b>						
I <sub>LIMF</sub>	High side MOSFET switch current limit	2.2V ≤ V <sub>IN</sub> ≤ 5.5V		430		mA
	Low side MOSFET switch current limit			430		mA
<b>OUTPUT DISCHARGE SWITCH (VOUT)</b>						
R <sub>DSCH_VOUT</sub>	MOSFET on-resistance	EN = GND, I <sub>OUT</sub> = -10mA into V <sub>OUT</sub> pin	30	65		Ω
I <sub>IN_VOUT</sub>	Bias current into V <sub>OUT</sub> pin	EN = V <sub>IN</sub> , V <sub>OUT</sub> = 2V / 2.8V, CTRL = GND	T <sub>A</sub> = 25°C	40	660	nA
			T <sub>A</sub> = -40°C to 85°C		1570	
<b>LOAD OUTPUT (LOAD)</b>						
R <sub>LOAD</sub>	High side MOSFET on-resistance	I <sub>LOAD</sub> = 50mA, CTRL = V <sub>IN</sub> , V <sub>OUT</sub> = 2.0V / 2.8V, 2.2V ≤ V <sub>IN</sub> ≤ 5.5V	0.6	1.25		Ω
R <sub>DSCH_LOAD</sub>	Low side MOSFET on-resistance	CTRL = GND, 2.2V ≤ V <sub>IN</sub> ≤ 5.5V, I <sub>LOAD</sub> = -10mA	30	65		
t <sub>Rise_LOAD</sub>	V <sub>LOAD</sub> rise time	Starting with CTRL low to high transition, time to ramp V <sub>LOAD</sub> from 0V to 95%, V <sub>OUT</sub> = 1.8V / 2.6V, 2.2V ≤ V <sub>IN</sub> ≤ 5.5V, I <sub>LOAD</sub> = 1mA, T <sub>A</sub> = 25°C	315	800		µs

## Electrical Characteristics (continued)

$V_{IN} = 3.6V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$ , typical values are at  $T_A = 25^\circ C$  (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>AUTO 100% MODE TRANSITION</b>						
$V_{TH\_100+}$	Auto 100% Mode exit detection threshold <sup>(1)</sup>	Rising $V_{IN}$ , 100% Mode is left with $V_{IN} = V_{OUT} + V_{TH\_100+}$ , max value at $T_J = 85^\circ C$	170	250	340	mV
$V_{TH\_100-}$	Auto 100% Mode enter detection threshold <sup>(1)</sup>	Falling $V_{IN}$ , 100% Mode is entered with $V_{IN} = V_{OUT} + V_{TH\_100-}$ , max value at $T_J = 85^\circ C$	110	200	280	
<b>OUTPUT</b>						
$t_{Startup\_delay}$	Regulator start up delay time	From transition EN = low to high until device starts switching	10	25		ms
$t_{Softstart}$	Softstart time with reduced switch current limit	$2.2V \leq V_{IN} \leq 5.5V$ , EN = $V_{IN}$	400	1200		μs
$I_{LIM\_softstart}$	High side MOSFET switch current limit	Reduced switch current limit during softstart			80	150
	Low side MOSFET switch current limit				200	150
$V_{OUT}$	Output voltage range	Output voltages are selected with pins VSEL1, VSEL2, VSEL3	TPS82740A	1.8	2.5	V
	Output voltage accuracy		TPS82740B	2.6	3.3	%
	DC output voltage load regulation	$I_{OUT} = 10mA$ , $V_{OUT} = 1.8V / 2.6V$	-2.5	0	2.5	
	DC output voltage line regulation	$I_{OUT} = 100mA$ , $V_{OUT} = 1.8V / 2.6V$	-2	0	2	
	DC output voltage load regulation	$V_{OUT} = 1.8V / 2.6V$ , CTRL = $V_{IN}$	0.001			%/mA
	DC output voltage line regulation	$V_{OUT} = 1.8V / 2.6V$ , CTRL = $V_{IN}$ , $I_{OUT} = 10 mA$ , $2.5V \leq V_{IN} \leq 5.5V$	0			%/V

- (1)  $V_{IN}$  is compared to the programmed output voltage ( $V_{OUT}$ ). When  $V_{IN}-V_{OUT}$  falls below  $V_{TH\_100-}$ , the device enters 100% Mode by turning the high side MOSFET on. 100% Mode is exited when  $V_{IN}-V_{OUT}$  exceeds  $V_{TH\_100+}$  and the device starts switching. The hysteresis for the 100% Mode detection threshold  $V_{TH\_100+} - V_{TH\_100-}$  is always positive and 50 mV(typ.)


## 8.6 Typical Characteristics

TABLE OF GRAPHS			FIGURE
$\eta$	Efficiency	vs Output Current	Figure 3, Figure 4, Figure 5, Figure 6
$\eta$	Efficiency	vs Input Voltage	Figure 7, Figure 8, Figure 9, Figure 10
$V_{OUT}$	Output voltage	vs Output current	Figure 11, Figure 12, Figure 13, Figure 14
$I_Q$	Operating quiescent current	vs Input voltage	Figure 1
$I_{SD}$	Shutdown current	vs Input voltage	Figure 2
	Automatic Transition into 100% Mode		Figure 18, Figure 19, Figure 20
$F_{SW}$	Switching frequency	vs Output current	Figure 15, Figure 16, Figure 17
	Line and Load Transient Performance		Figure 21, Figure 22, Figure 23, Figure 24, Figure 25, Figure 26, Figure 27, Figure 28, Figure 29, Figure 30
	AC load regulation performance		Figure 31, Figure 32
LOAD	LOAD Output Behavior		Figure 33, Figure 34, Figure 35
	Input Voltage Ramp up / down		Figure 36, Figure 37, Figure 38, Figure 39


## Typical Characteristics (continued)

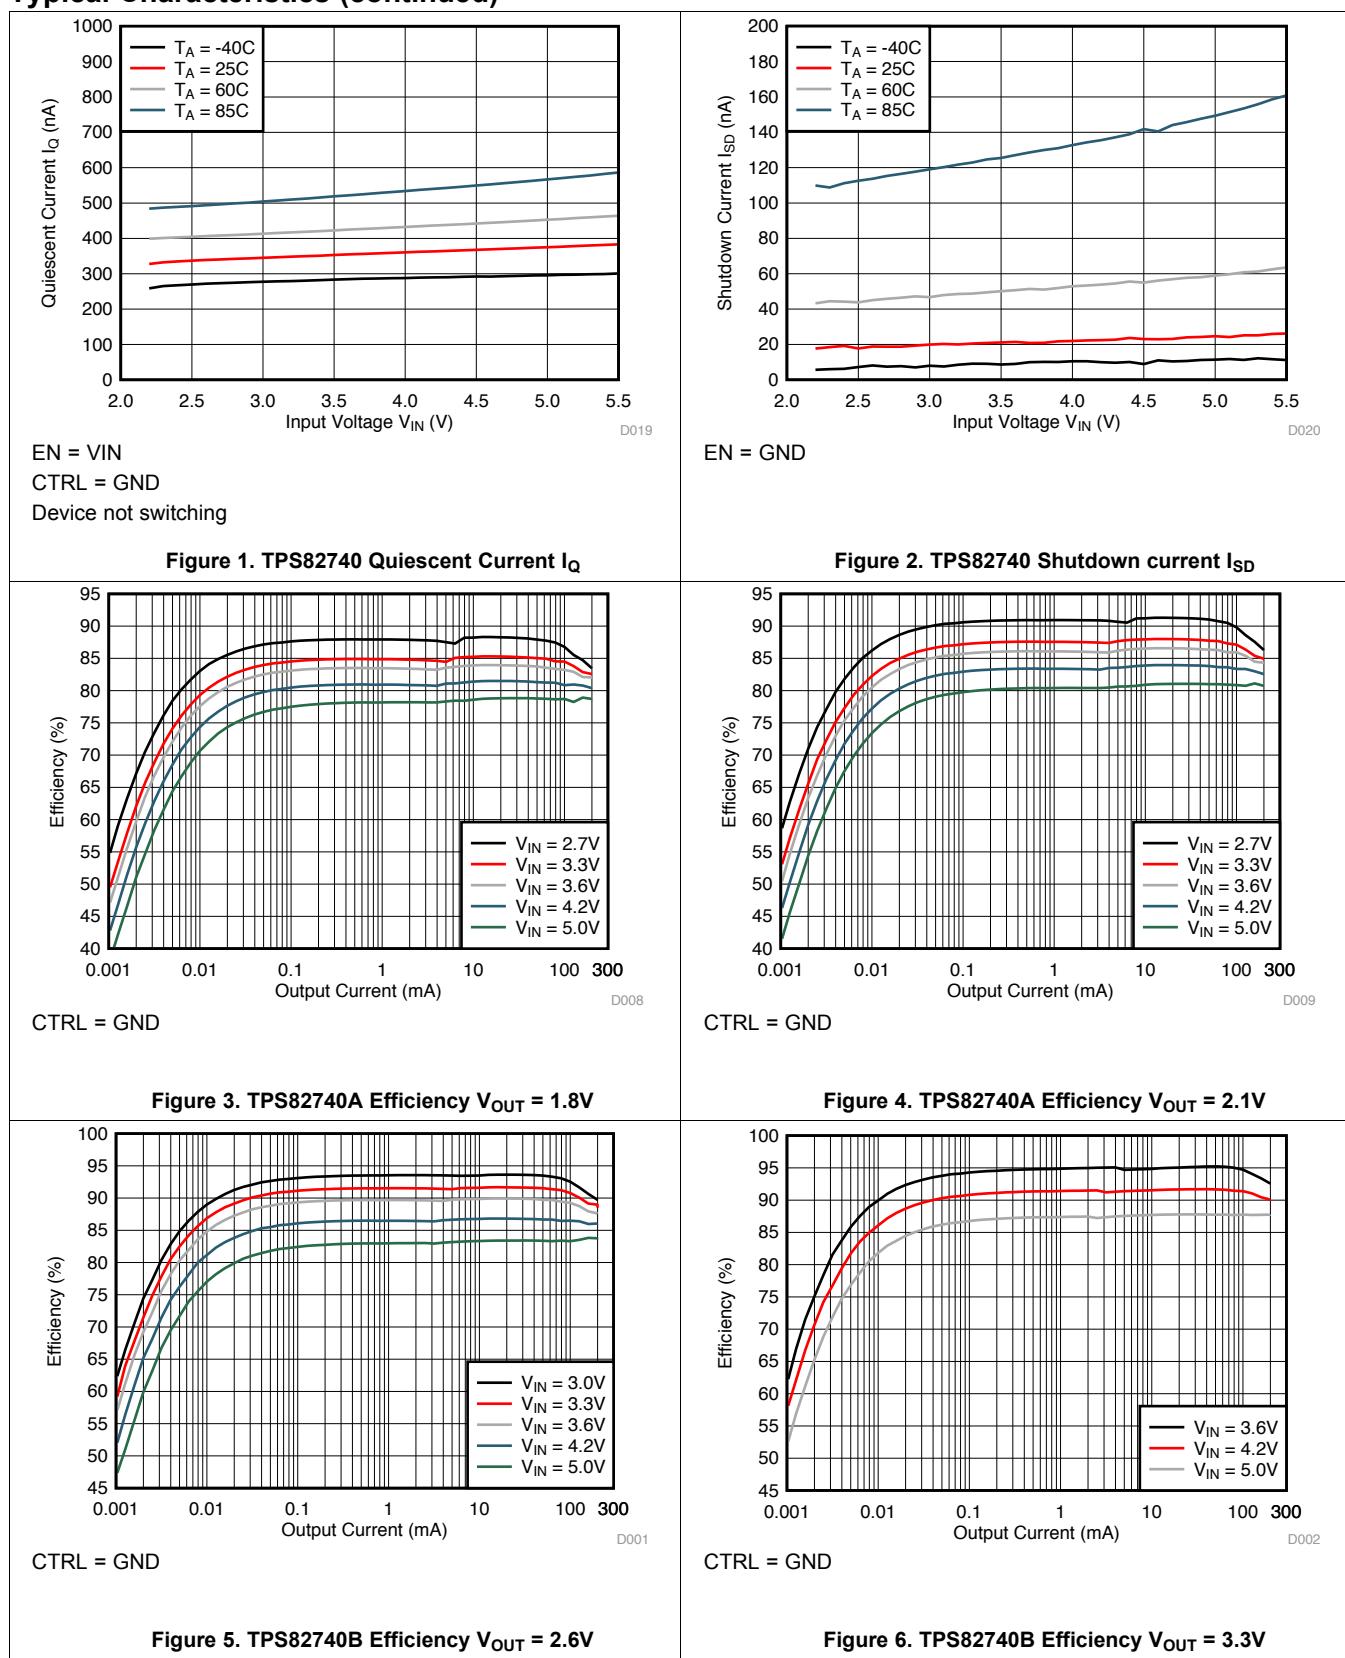


## Typical Characteristics (continued)

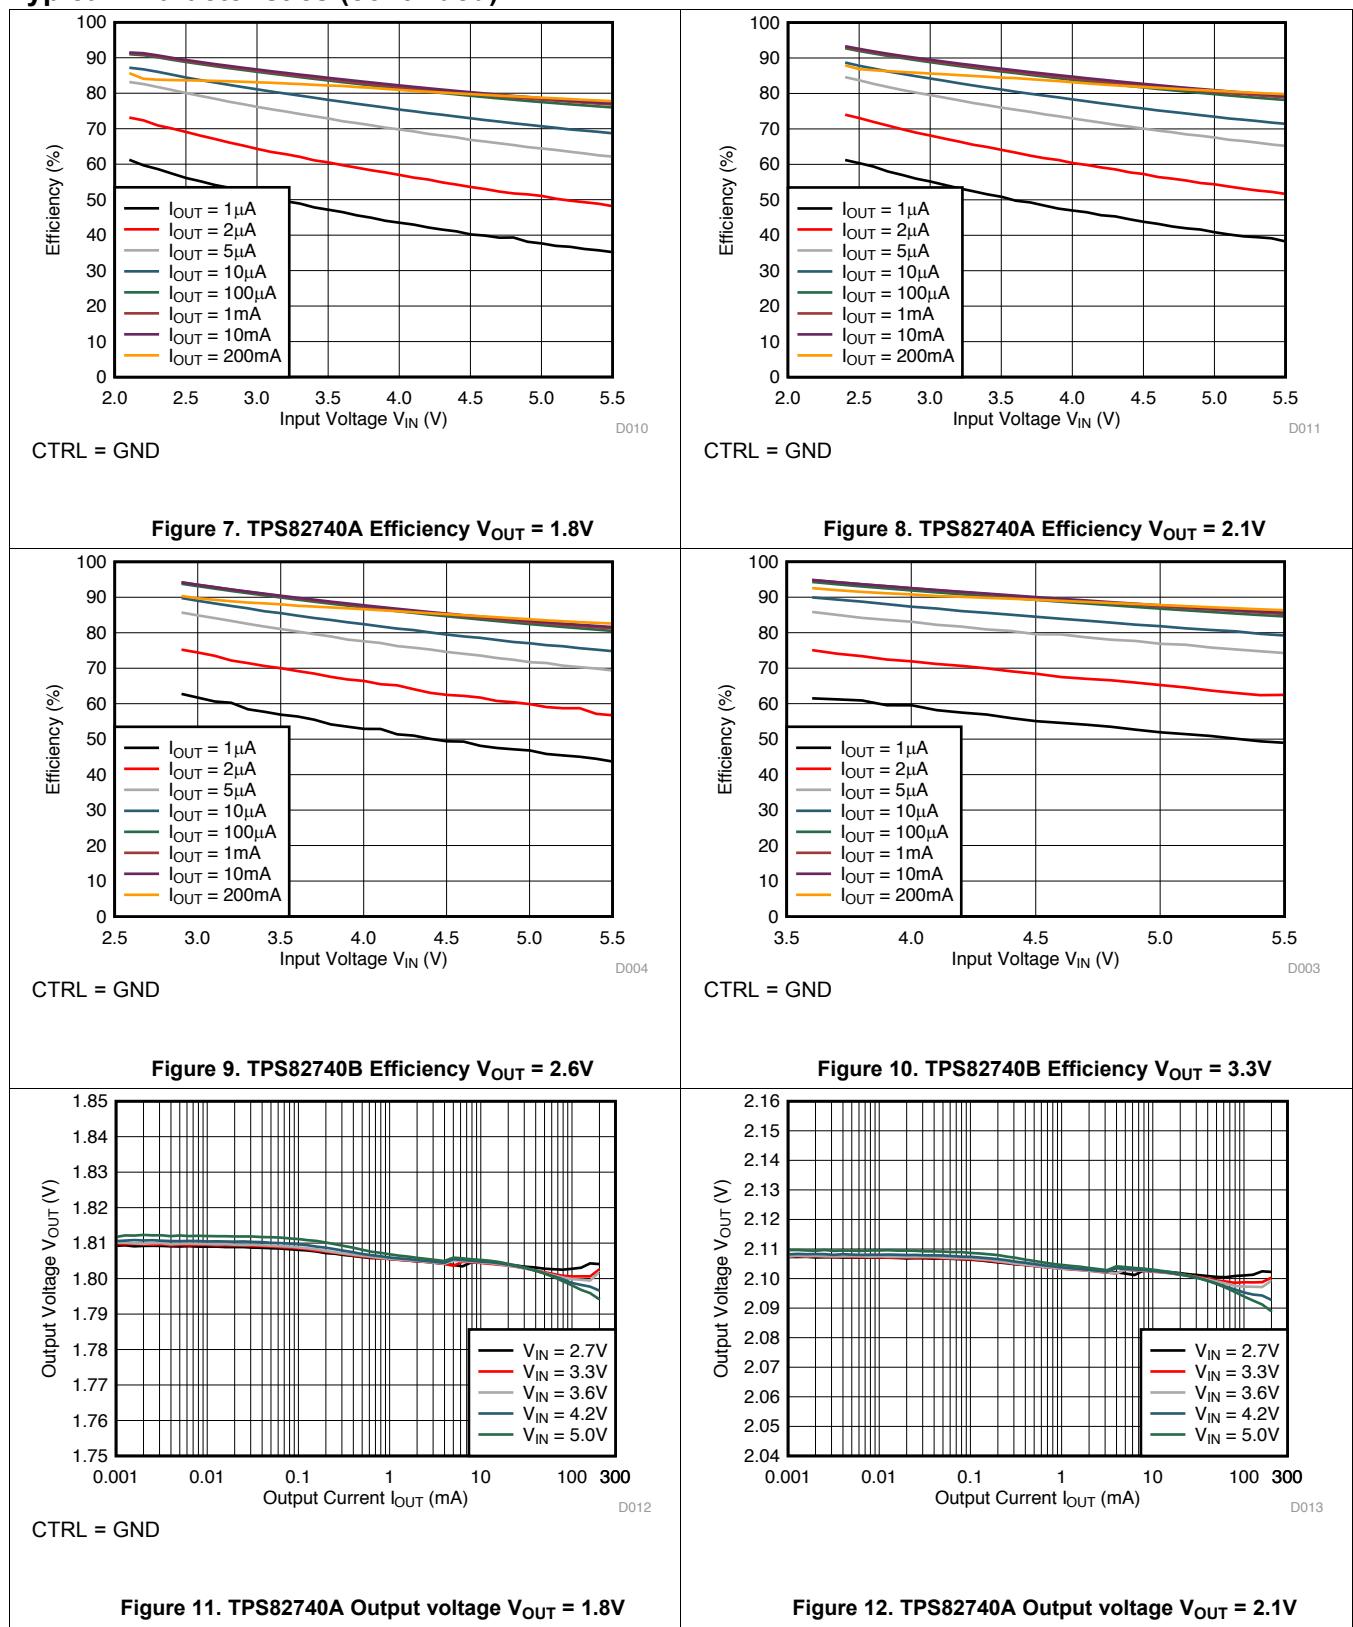


## Typical Characteristics (continued)

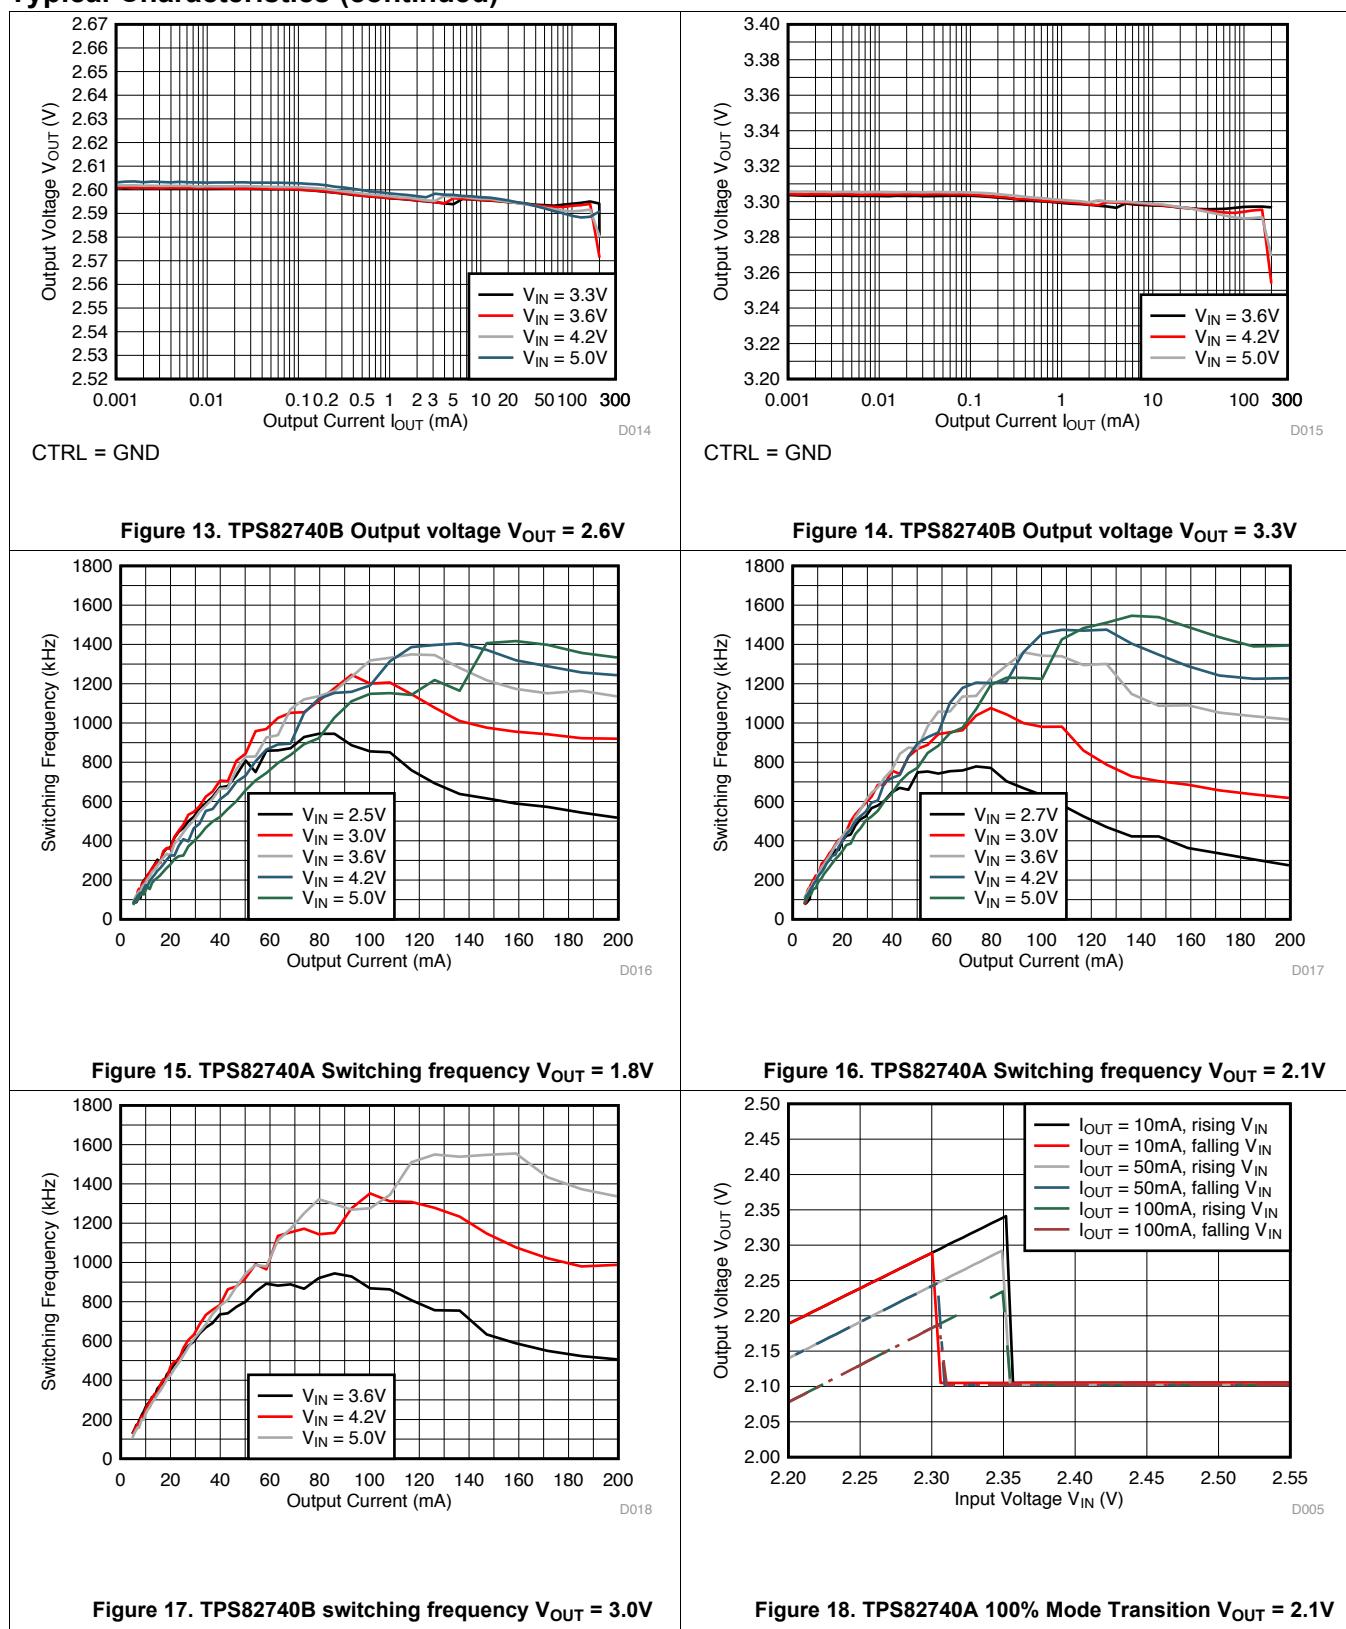


## Typical Characteristics (continued)

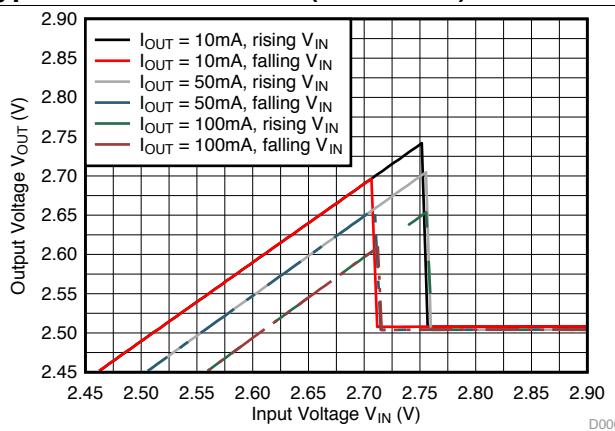


**Figure 19. TPS82740A 100% Mode Transition  $V_{OUT} = 2.5V$**

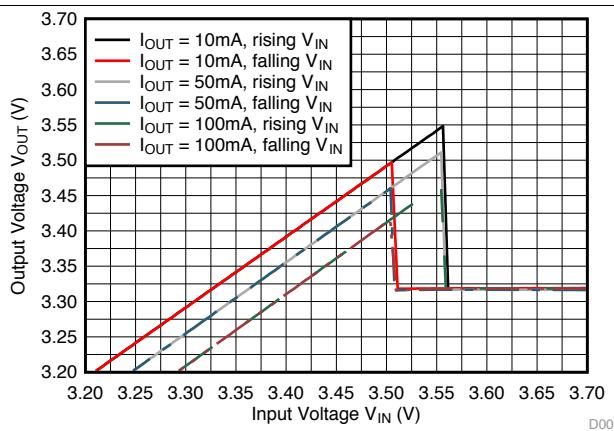


**Figure 20. TPS82740B 100% Mode Transition  $V_{OUT} = 3.3V$**

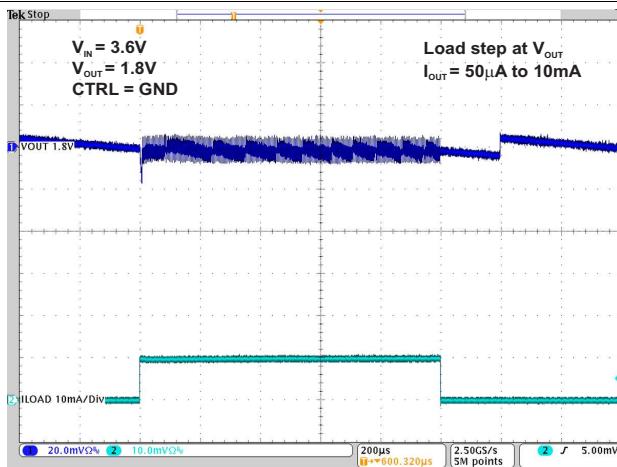


**Figure 21. TPS82740A Load Transient Response  $V_{OUT} = 1.8V$**

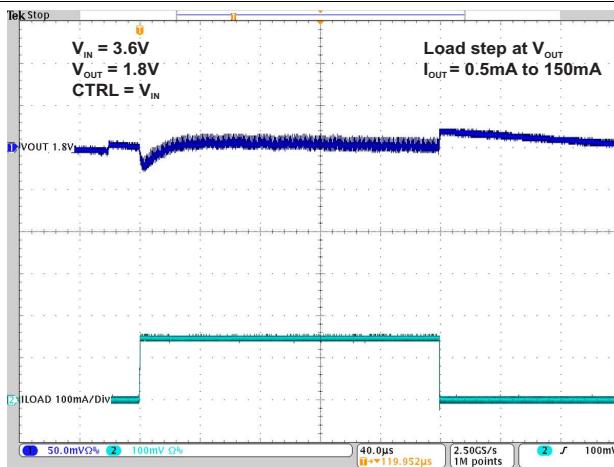

**Figure 22. TPS82740A Load Transient Response  $V_{OUT} = 1.8V$**


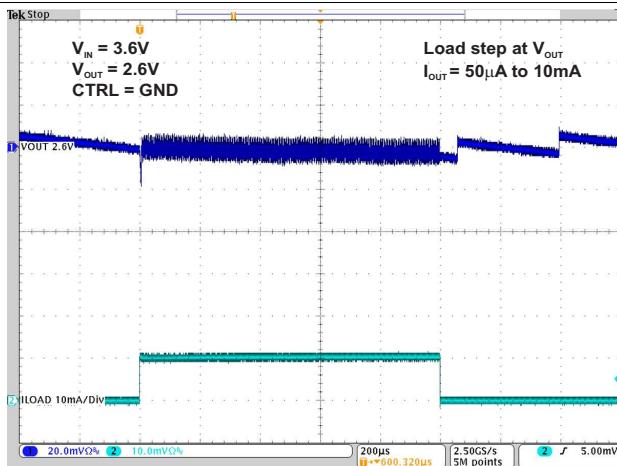


**Figure 23. TPS82740B Load Transient Response  $V_{OUT} = 2.6V$**

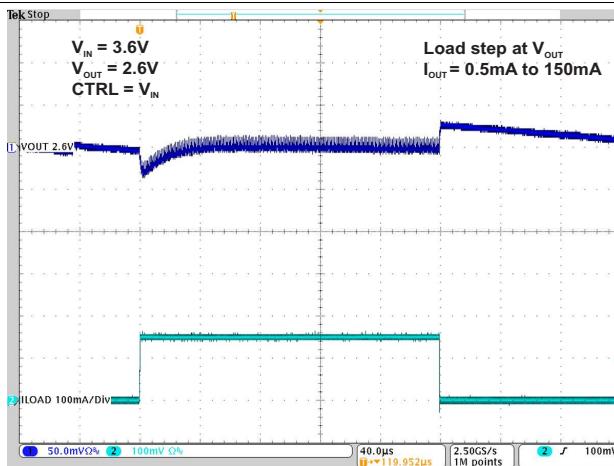



**Figure 24. TPS82740B Load Transient Response  $V_{OUT} = 2.6V$**

## Typical Characteristics (continued)

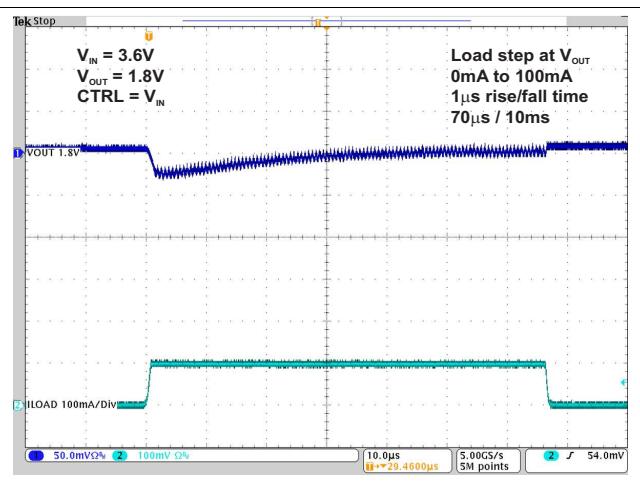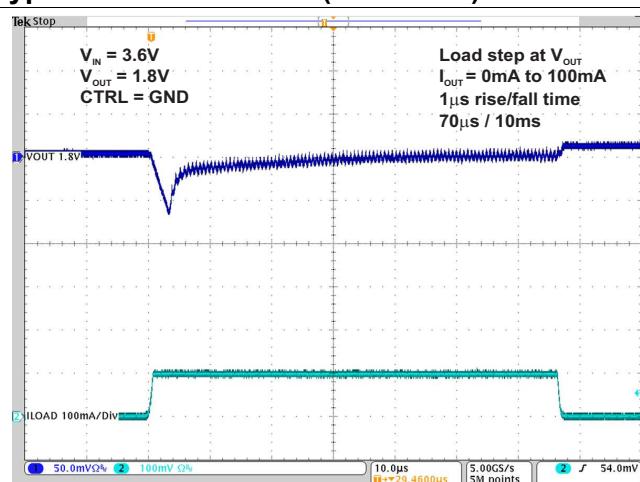



**Figure 25. TPS82740A Load Transient Response  $V_{OUT} = 1.8V$**

**Figure 26. TPS82740A Load Transient Response  $V_{OUT} = 1.8V$**

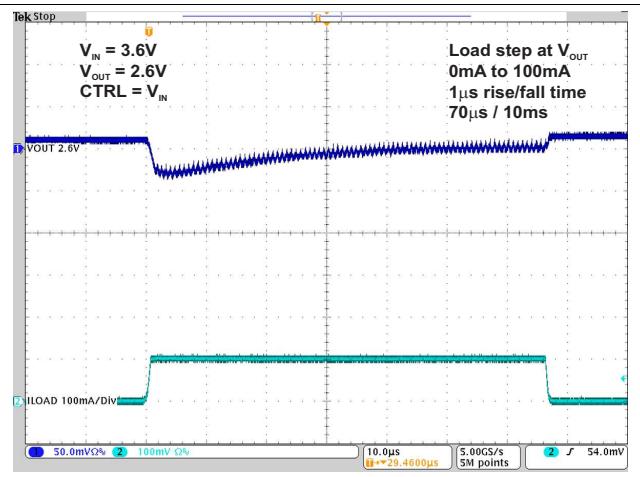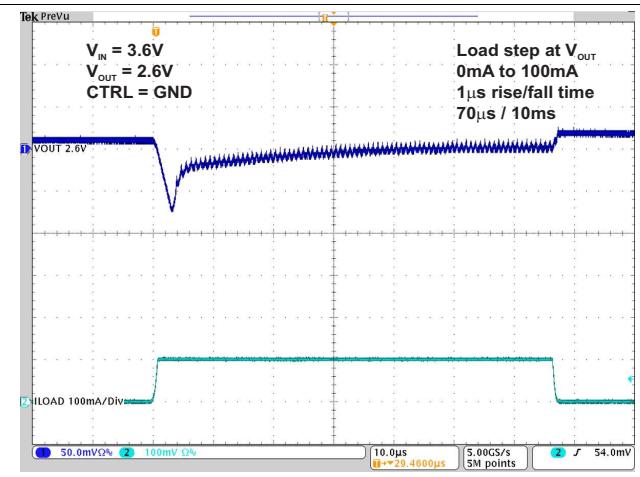

**Figure 27. TPS82740B Load Transient Response  $V_{OUT} = 2.6V$**


**Figure 28. TPS82740B Load Transient response  $V_{OUT} = 2.6V$**

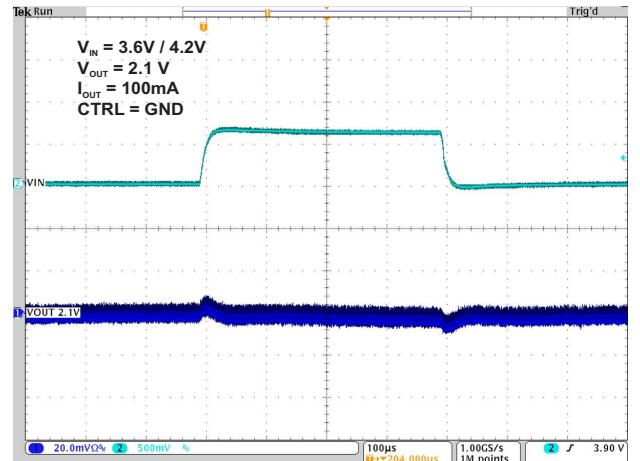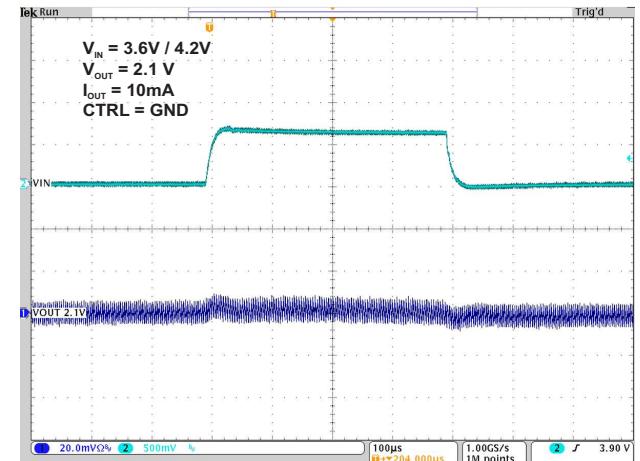


**Figure 29. TPS82740A Line Transient Response  $I_{OUT} = 10mA$**

**Figure 30. TPS82740A Line Transient Response  $I_{OUT} = 100mA$**


## Typical Characteristics (continued)

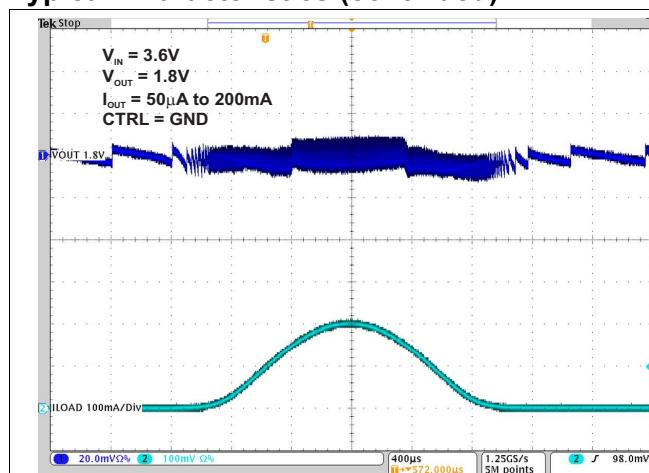


**Figure 31. TPS82740A AC Load Sweep  $V_{OUT} = 1.8V$**

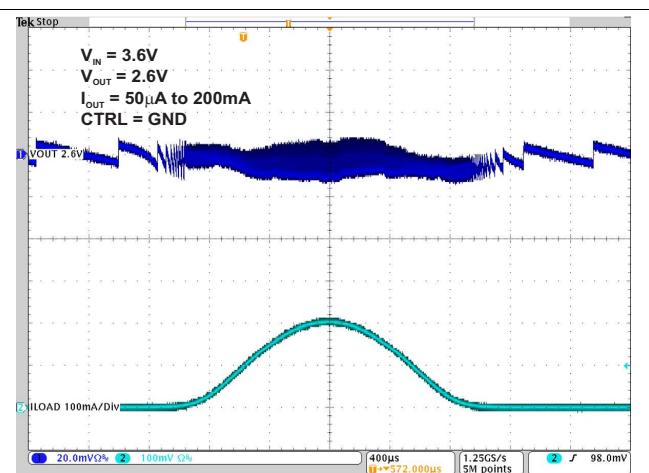


**Figure 32. TPS82740B AC Load Sweep  $V_{OUT} = 2.6V$**

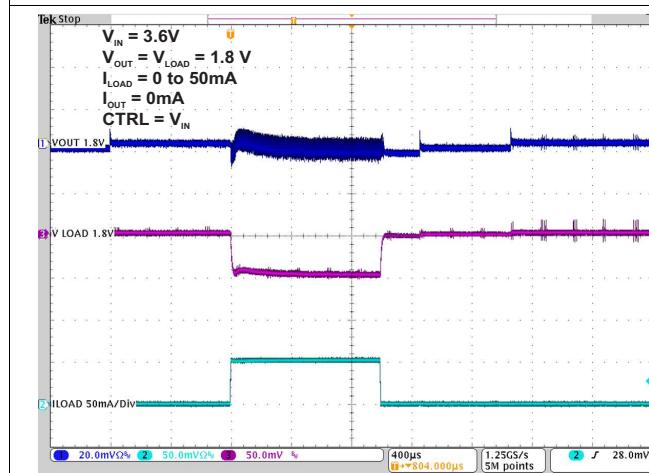


**Figure 33. TPS82740A Load Step at LOAD Output**

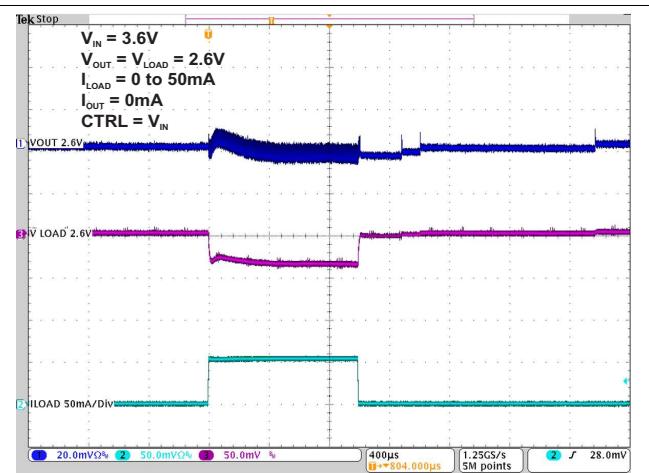

**Figure 34. TPS82740B Load Step at LOAD Output**


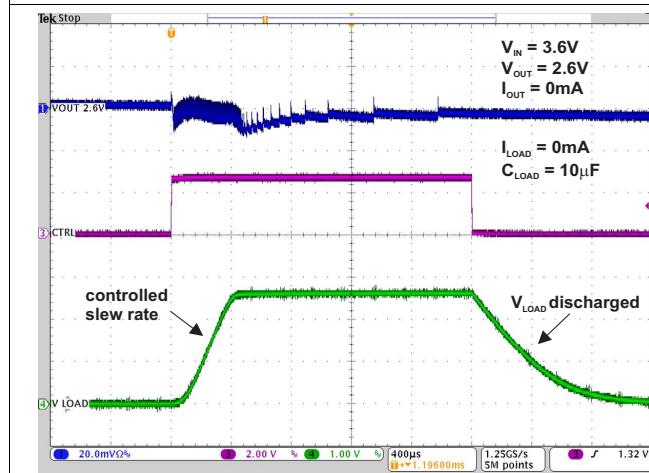


**Figure 35. TPS82740B Load Output ON / OFF**

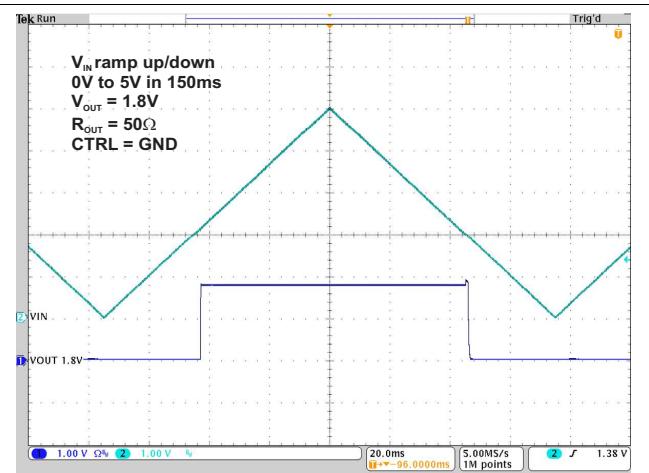


**Figure 36. TPS82740A Input Voltage Ramp Up / Down**

## Typical Characteristics (continued)

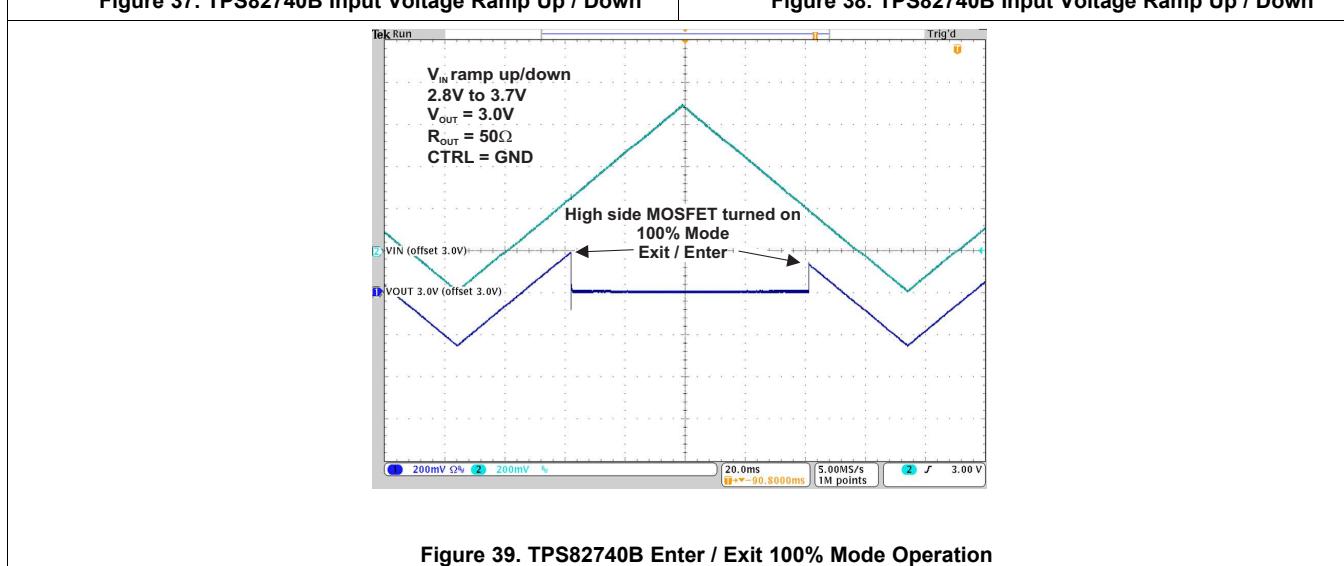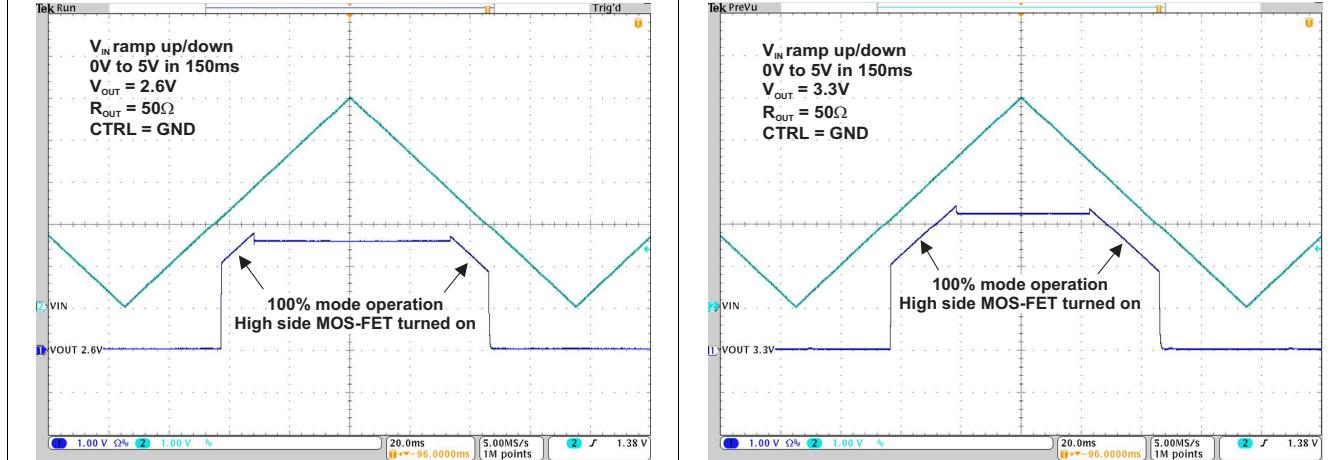

## 9 Parameter Measurement Information

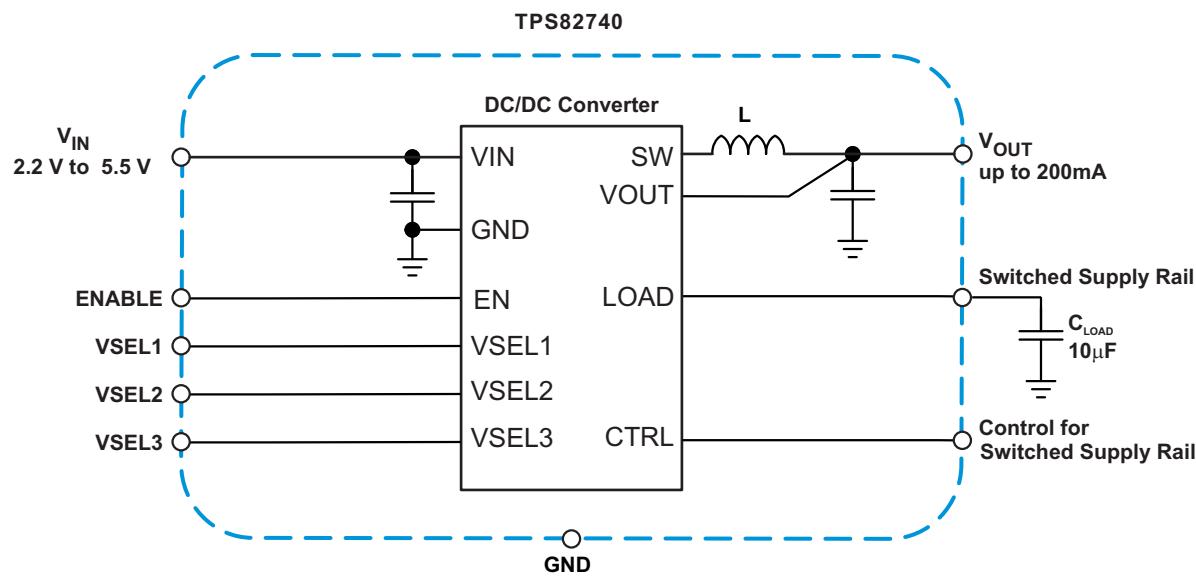


## 10 Detailed Description

### 10.1 Overview

The TPS82740 is the first fully integrated step down converter module with an ultra low quiescent current consumption (360nA typ.) while maintaining a regulated output voltage and featuring TI's DCS-Control™ topology. The device extends high efficiency operation to output currents down to a few micro amperes.

### 10.2 Functional Block Diagram

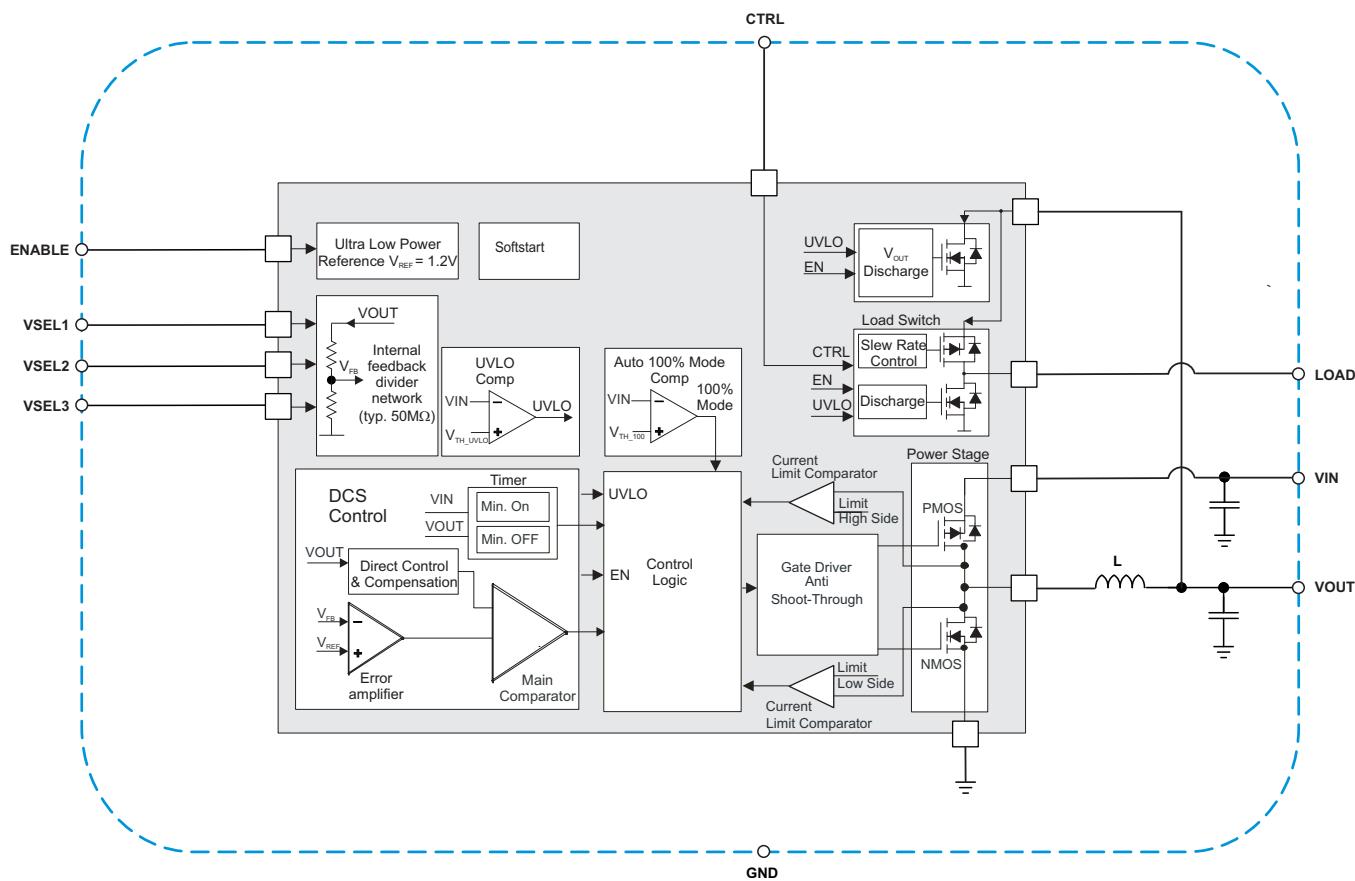

### 10.3 Feature Description

#### 10.3.1 DCS-Control™

TI's DCS-Control™ (Direct Control with Seamless Transition into Power Save Mode) is an advanced regulation topology, which combines the advantages of hysteretic and voltage mode control. Characteristics of DCS-Control™ are excellent AC load regulation and transient response, low output ripple voltage and a seamless transition between PFM and PWM mode operation. DCS-Control™ includes an AC loop which senses the output voltage (VOUT pin) and directly feeds the information to a fast comparator stage. This comparator sets the switching frequency, which is constant for steady state operating conditions, and provides immediate response to dynamic load changes. In order to achieve accurate DC load regulation, a voltage feedback loop is used.

The DCS-Control™ topology supports PWM (Pulse Width Modulation) mode for medium and high load conditions and Power Save Mode at light loads. During PWM mode, it operates in continuous conduction. The switching frequency goes up to 1.7MHz with a controlled frequency variation depending on the input voltage. If the load current decreases, the converter seamlessly enters Power Save Mode to maintain high efficiency down to very light loads. In Power Save Mode, the switching frequency varies nearly linearly with the load current. Since DCS-Control™ supports both operation modes within one single building block, the transition from PWM to Power Save Mode is seamless without effects on the output voltage. The TPS82740 offers both excellent DC

## Feature Description (continued)

voltage and superior load transient regulation, combined with very low output voltage ripple, minimizing interference with RF circuits. At high load currents, the converter operates in quasi fixed frequency PWM mode operation and at light loads in PFM (Pulse Frequency Modulation) mode to maintain highest efficiency over the full load current range. In PFM Mode, the device generates a single switching pulse to ramp up the inductor current and recharge the output capacitor, followed by a sleep period where most of the internal circuits are shutdown to achieve the lowest quiescent current. During this time, the load current is supported by the output capacitor. The duration of the sleep period depends on the load current and the inductor peak current.

During the sleep periods, the quiescent current of the TPS82740 is reduced to 360nA. This low quiescent current consumption is achieved by an ultra low power voltage reference, an integrated high impedance (typ. 50MΩ) feedback divider network and an optimized DCS-Control™ block.

### 10.3.2 LOAD Switch

The LOAD pin can be used to power an additional, temporarily used sub-system. If the CTRL pin is set high, the LOAD pin is connected to the VOUT pin via an integrated load switch. The load switch is slew rate controlled to support soft switching and not impacting the regulated output VOUT. If the CTRL pin is set to low, the LOAD pin is disconnected from the VOUT pin and internally connected to GND by an internal discharge switch. The CTRL pin can be controlled by a micro controller and must be terminated. With CTRL pin high, the quiescent current is increased to improve the transient response.

### 10.3.3 Output Voltage Selection (VSEL1, VSEL2, VSEL3)

The TPS82740 provides an integrated, high impedance (typ. 50MΩ) feedback resistor divider network which is programmed by the pins VSEL1-3. The TPS82740A supports an output voltage range of 1.8V to 2.5V in 100mV steps, while the TPS82740B supports an output voltage range from 2.6V to 3.3V in 100mV steps. The output voltage can be changed during operation and supports a simple dynamic output voltage scaling, shown in [Figure 44](#). The output voltage is programmed according to [Table 2](#) and [Table 3](#).

### 10.3.4 Output Discharge Function (VOUT and LOAD)

Both the VOUT pin and the LOAD pin feature a discharge circuit to connect each rail to GND, once they are disabled. This feature prevents residual charge voltages on capacitors connected to these pins, which may impact proper power up of the main- and sub-system. With the CTRL pin pulled low, the discharge circuit at the LOAD pin activates. With the EN pin pulled low, the discharge circuit at the pin VOUT activates.

### 10.3.5 Internal Current Limit

The TPS82740 integrates a current limit in the high side, as well as in the low side MOSFETs to protect the device against overload or short circuit conditions. The peak current in the switches is monitored cycle by cycle. If the high side MOSFET current limit is reached, the high side MOSFET is turned off and the low side MOSFET is turned on until the current decreases below the low side MOSFET current limit.

## 10.4 Device Functional Modes

### 10.4.1 Enable / Shutdown

The TPS82740 is activated when the EN pin is set high. For proper operation, the pin must be terminated and must not be left floating. With the EN pin set low, the device enters shutdown mode with less than typ. 70nA current consumption.


### 10.4.2 Softstart

When the device is enabled, the internal reference is powered up and after the startup delay time  $t_{\text{Startup\_delay}}$  has expired, the device enters softstart, starts switching and ramps up the output voltage. During softstart, the device operates with a reduced current limit,  $I_{\text{LIM\_softstart}}$ , of typ. 1/3 of the nominal current limit. This reduced current limit is active during the time  $t_{\text{Softstart}}$ . The current limit is increased to its nominal value,  $I_{\text{LIMF}}$ , once this time has expired or the nominal output voltage is reached.

## Device Functional Modes (continued)

### 10.4.3 Automatic Transition into 100% Mode

Once the input voltage comes close to the output voltage, the TPS82740 stops switching and enters 100% duty cycle operation. It connects the output V<sub>OUT</sub> via the inductor and the internal high side MOSFET switch to the input V<sub>IN</sub>, once the input voltage V<sub>IN</sub> falls below the 100% mode enter threshold, V<sub>TH\_100-</sub>. In 100% mode switching stops eliminating output voltage ripple. Because the output is connected to the input, the output voltage tracks the input voltage minus the voltage drop across the internal high side switch and the inductor caused by the output current. Once the input voltage increases and trips the 100% mode exit threshold, V<sub>TH\_100+</sub>, the TPS82740 turns on and starts switching again. See [Figure 40](#), [Figure 18](#), [Figure 19](#) and [Figure 20](#).

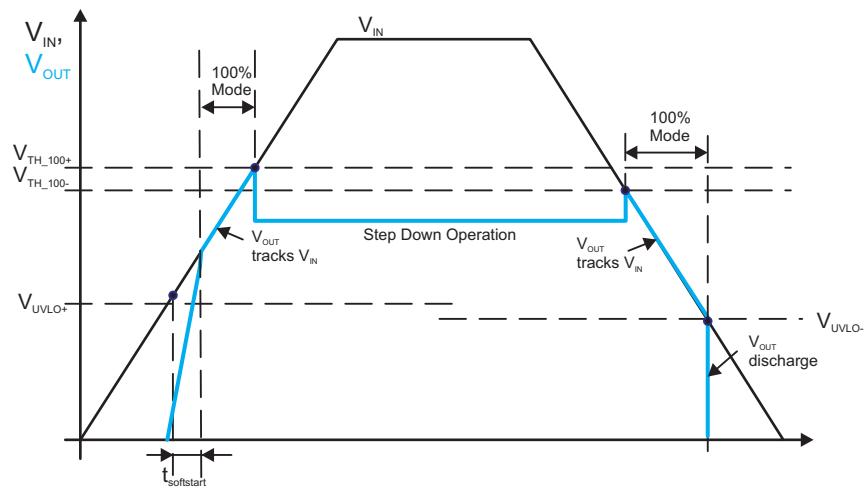

**Figure 40. Automatic Transition into 100% Mode**


## 11 Application and Implementation

### 11.1 Application Information

The device is designed to operate from an input voltage supply range between 2.2V and 5.5V with a maximum output current of 200mA. Once the input voltage comes close to the output voltage, the DC/DC converter stops switching and enters 100% duty cycle operation. The integrated slew rate controlled load switch can distribute the selected output voltage to a temporarily used sub-system. The TPS82740 module operates in PWM mode for medium and high load conditions and in power save mode at light load currents.

At high load currents, the converter operates in quasi fixed frequency PWM mode operation. The switching frequency is up to 1.7MHz with a controlled frequency variation depending on the input voltage. If the load current decreases, the converter seamlessly enters Power Save Mode by varying the switching frequency linearly to maintain high efficiency over the full load current range. At very light load conditions the device generates a single switching pulse to ramp up the inductor current and recharge the output capacitor, followed by a sleep period where most of the internal circuits are shutdown to achieve 360nA quiescent current consumption.

### 11.2 Typical Application

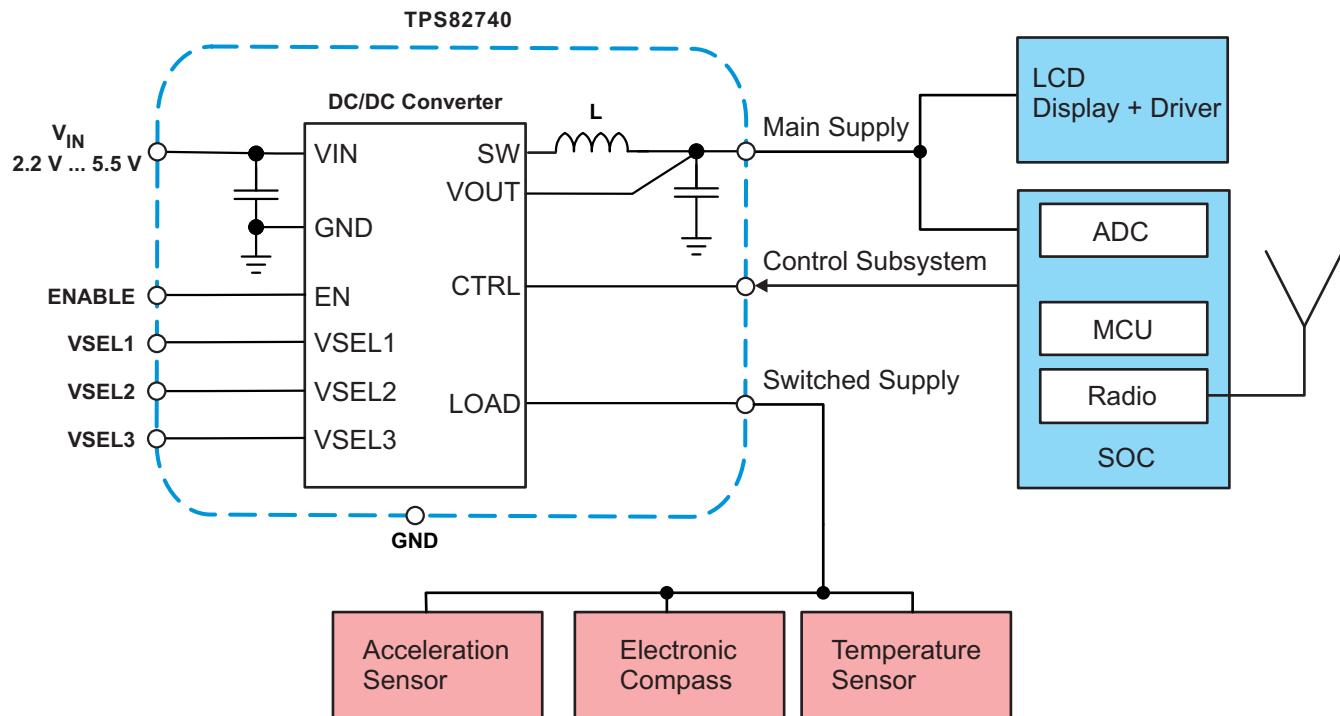

#### 11.2.1 Design Requirements

TPS82740 is a complete step-down converter module including all passive components (inductor, input and output capacitor). For most applications no additional input / output capacitors are required. Use the following typical application design procedure to select additional external components in case further performance improvement of the module is desired.

#### 11.2.2 Detailed Design Procedure

##### 11.2.2.1 Input Capacitor Selection

For most applications, the integrated input capacitor at the VIN pin is sufficient.

## Typical Application (continued)

TPS82740 uses a tiny ceramic input capacitor. When a ceramic capacitor is combined with trace or cable inductance, such as that from a wall adapter, a load step at the output can induce ringing at the VIN pin. This ringing can couple to the output and be mistaken as loop instability or can even damage the module. In this circumstance, additional ceramic "bulk" capacitance, such as electrolytic or tantalum, should be placed between the input of the module and the power source lead to reduce ringing that occurs between the inductance of the power source leads and the module.

### 11.2.2.2 Output Capacitor Selection

For most applications, the integrated output capacitor at the VOUT pin is sufficient.

In order to further reduce the output voltage ripple and improve the load transient performance an additional external output capacitance may be used. For most applications an additional 4.7 $\mu$ F or 10 $\mu$ F capacitor will be sufficient. Care should be taken that the total effective capacitance present at the output does not exceed 10 $\mu$ F in order to guarantee loop stability. Ceramic capacitors with low ESR values have the lowest output voltage ripple and are recommended.

At the LOAD output pin, no additional output capacitor is required. For applications demanding external capacitance connected to the LOAD pin, the total capacitance should not exceed 10 $\mu$ F.

### 11.2.3 Application Curves

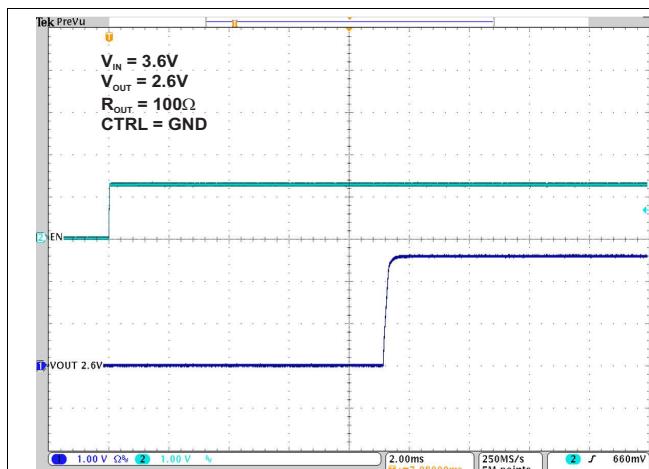


Figure 41. TPS82740B Device Enable and Start up

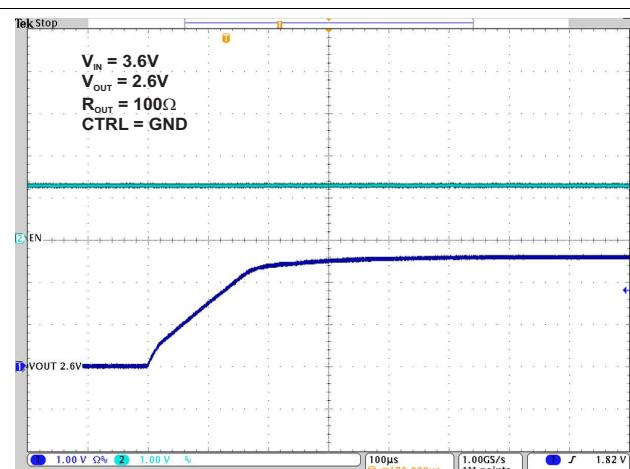


Figure 42. TPS82740B V<sub>OUT</sub> Ramp after Enable

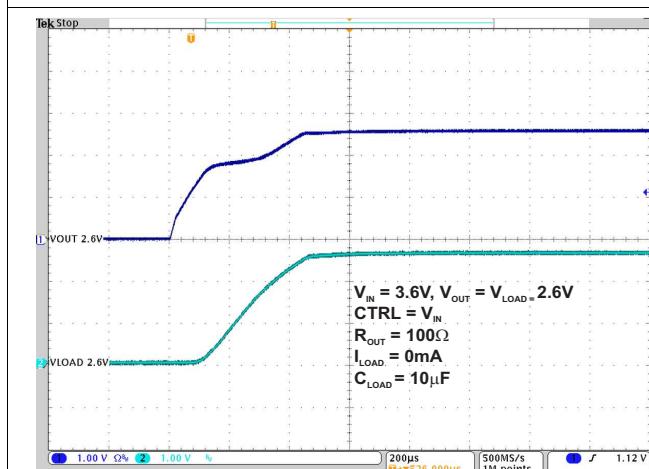


Figure 43. TPS82740B V<sub>OUT</sub> Ramp with activated LOAD Switch

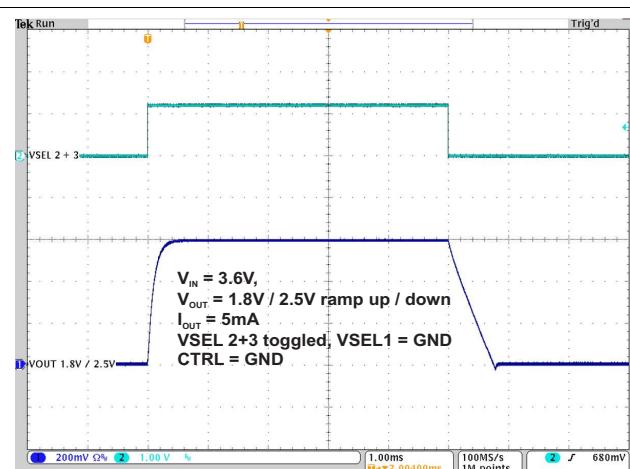


Figure 44. TPS82740A Dynamic Output Voltage Scaling:  
 $V_{OUT} = 1.8V / 2.5V$

## 12 Power Supply Recommendations


The TPS82740 device is a complete and optimized power supply module working within the given specification range without additional components. Please use the information given in the Application Information section to connect the input and output circuitry appropriately.

## 13 Layout

### 13.1 Layout Guidelines

In making the pad size for the uSiP LGA balls, it is recommended that the layout use a non-solder-mask defined (NSMD) land. With this method, the solder mask opening is made larger than the desired land area, and the opening size is defined by the copper pad width. [Figure 45](#) shows the appropriate diameters for a MicroSiP™ layout. [Figure 46](#) shows a suggestion for the PCB layout.

### 13.2 Layout Example

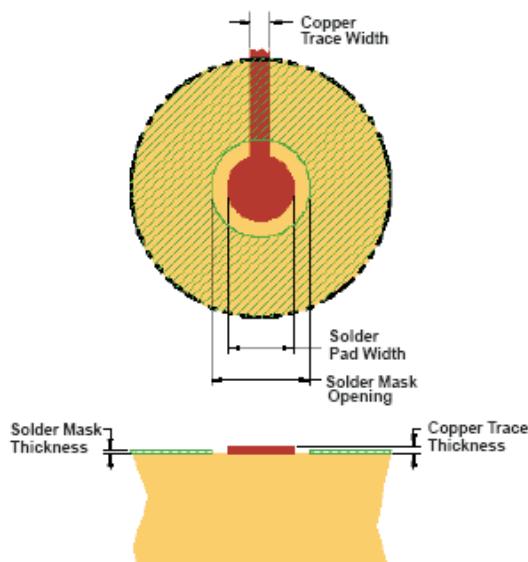

**Figure 45. Recommended Land Pattern Image and Dimensions**

SOLDER PAD DEFINITIONS <sup>(1)(2)(3)(4)</sup>	COPPER PAD	SOLDER MASK <sup>(5)</sup> OPENING	COPPER THICKNESS	STENCIL <sup>(6)</sup> OPENING	STENCIL THICKNESS
Non-solder-mask defined (NSMD)	0.30mm	0.360mm	1oz max (0.032mm)	0.34mm diameter	0.1mm thick

- (1) Circuit traces from non-solder-mask defined PWB lands should be 75µm to 100µm wide in the exposed area inside the solder mask opening. Wider trace widths reduce device stand off and affect reliability.
- (2) Best reliability results are achieved when the PWB laminate glass transition temperature is above the operating range of the intended application.
- (3) Recommend solder paste is Type 3 or Type 4.
- (4) For a PWB using a Ni/Au surface finish, the gold thickness should be less than 0.5mm to avoid a reduction in thermal fatigue performance.
- (5) Solder mask thickness should be less than 20 µm on top of the copper circuit pattern.
- (6) For best solder stencil performance use laser cut stencils with electro polishing. Chemically etched stencils give inferior solder paste volume control.

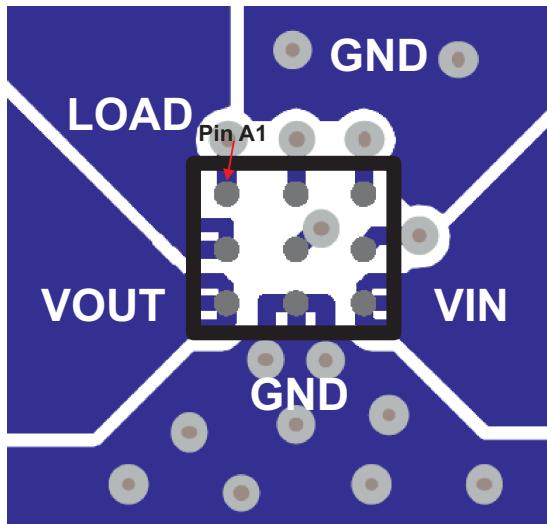


Figure 46. PCB Layout Suggestion

### 13.3 Surface Mount Information

The TPS82740 MicroSIP™ module uses an open frame construction for a fully automated assembly process and provides a large surface area for pick and place operations. See the "Pick Area" in the package drawing.

Package height and weight have been kept to a minimum, allowing MicroSIP™ device handling similar to a 0805 footprint component.

For reflow recommendations, see document J-STD-20 from the JEDEC/IPC standard.

## 14 Device and Documentation Support

### 14.1 Documentation Support

#### 14.1.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 4. Related Links**

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
TPS82740A	<a href="#">Click here</a>				
TPS82740B	<a href="#">Click here</a>				

### 14.2 Trademarks

DCS-Control, MicroSIP are trademarks of Texas Instruments.

Bluetooth is a registered trademark of Bluetooth SIG, Inc..

### 14.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 14.4 Glossary

[SLYZ022 — TI Glossary](#).

This glossary lists and explains terms, acronyms, and definitions.

## 15 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.


# SIP0009F



## PACKAGE OUTLINE

### MicroSiP™ - 1.1 mm max height

MICRO SYSTEM IN PACKAGE

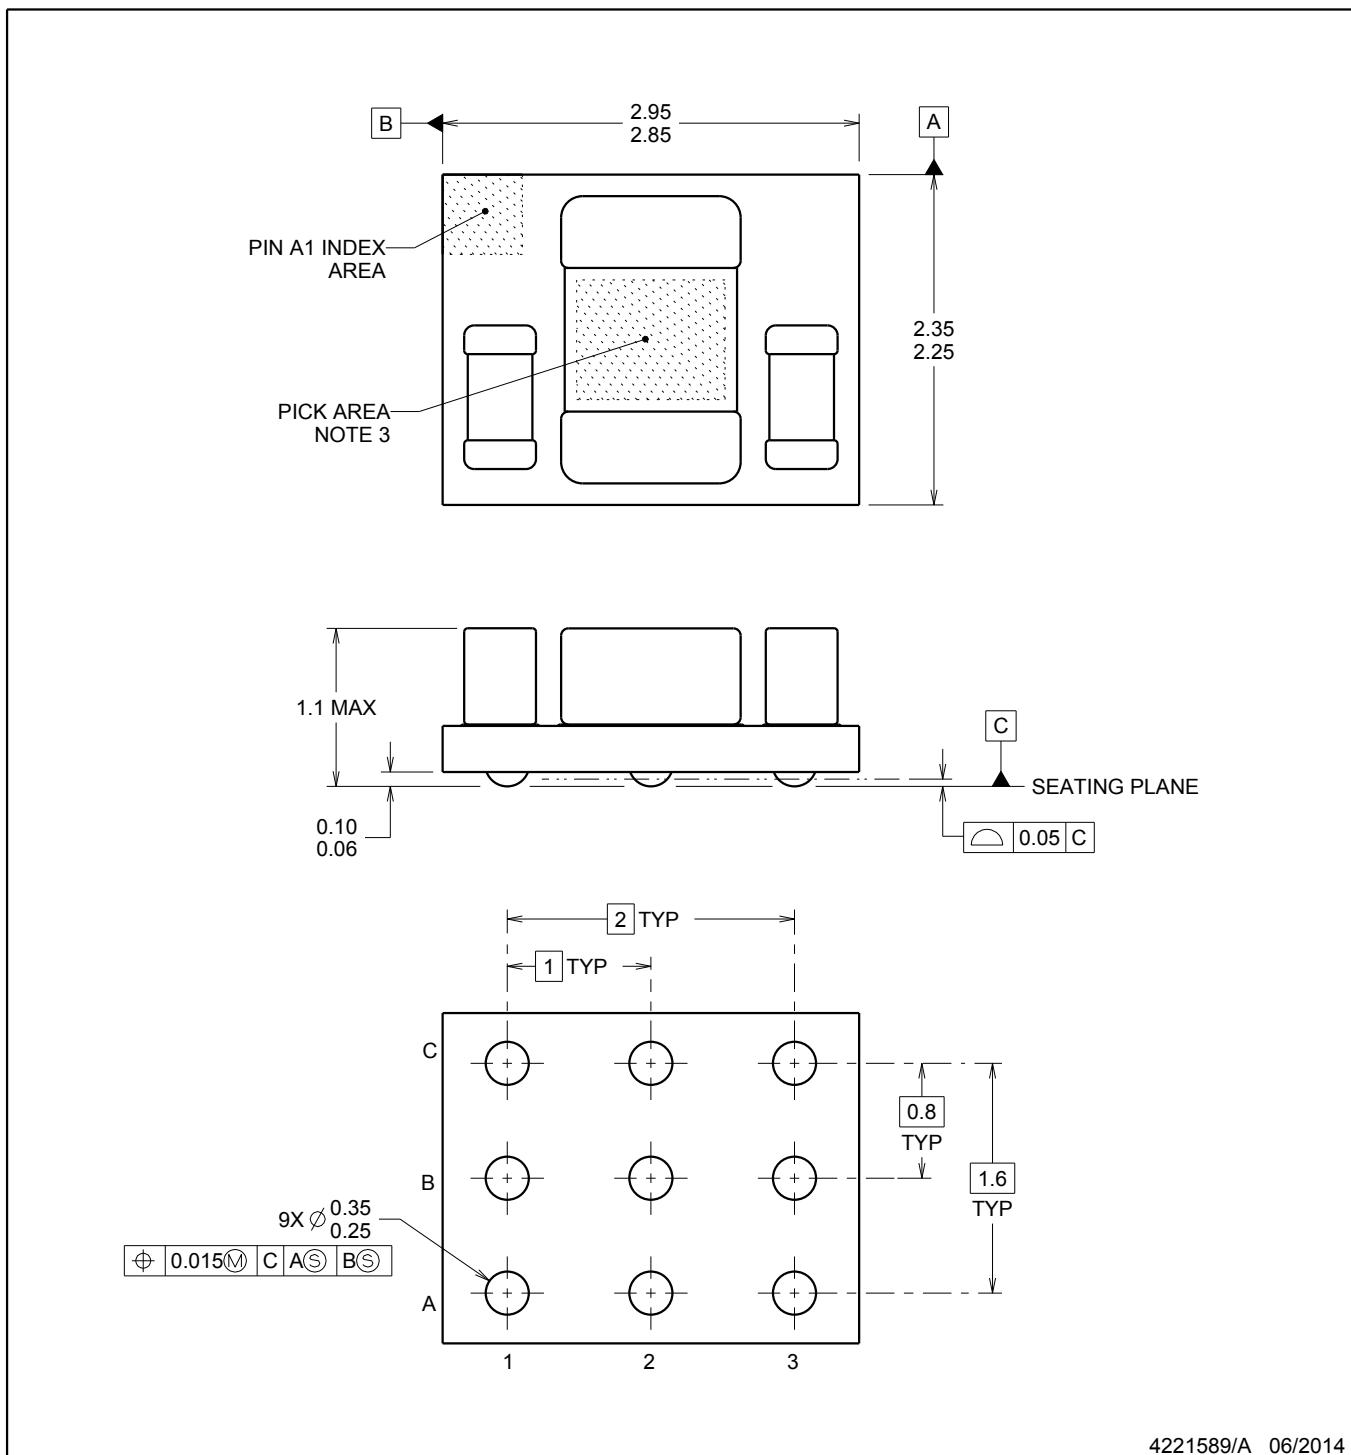

4221589/A 06/2014

MicroSiP is a trademark of Texas Instruments.

#### NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. For pick and place nozzle recommendation, see product datasheet.
4. Location, size and quantity of each component are for reference only and may vary.

# EXAMPLE BOARD LAYOUT


SIP0009F

MicroSiP™ - 1.1 mm max height

MICRO SYSTEM IN PACKAGE

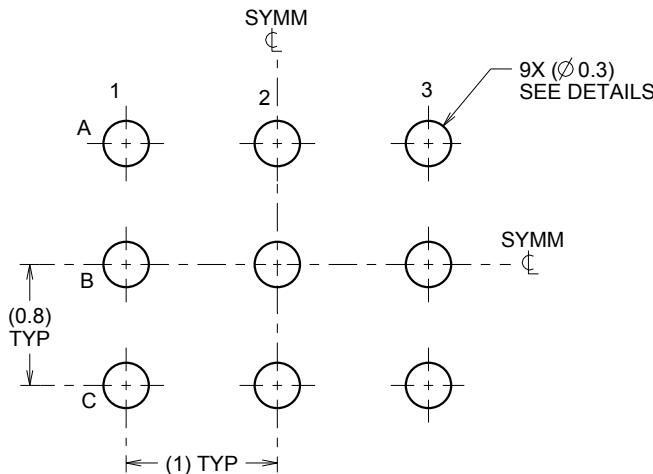

LAND PATTERN EXAMPLE  
NOT TO SCALE

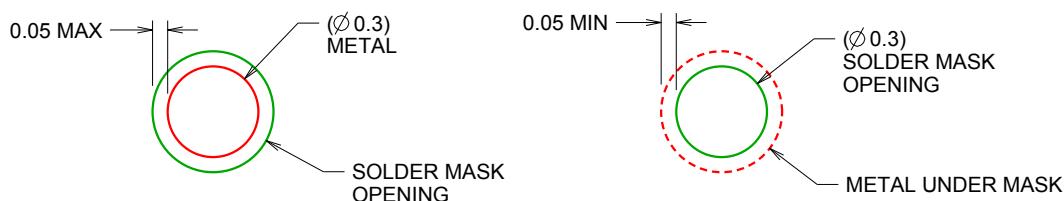

SOLDER MASK DETAILS  
NOT TO SCALE

4221589/A 06/2014

NOTES: (continued)


5. For more information, see Texas Instruments literature number SBVA017 ([www.ti.com/lit/sbva017](http://www.ti.com/lit/sbva017)).

# EXAMPLE STENCIL DESIGN


SIP0009F

MicroSiP™ - 1.1 mm max height

MICRO SYSTEM IN PACKAGE

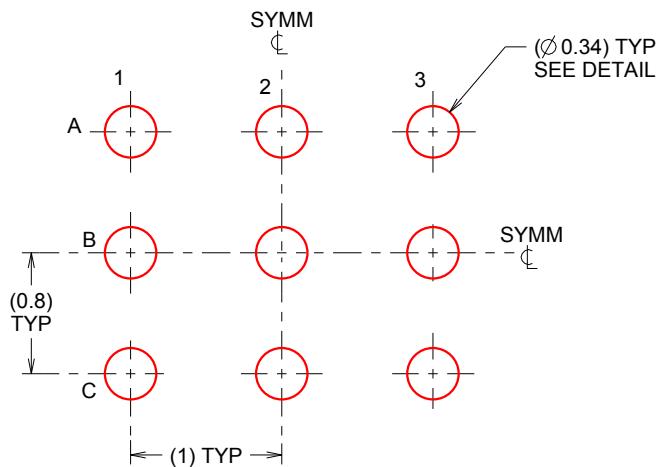

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:20X

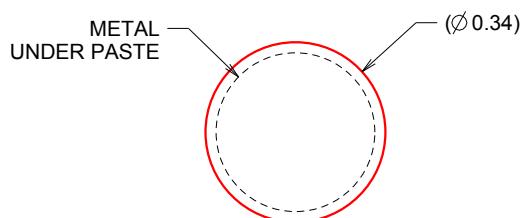

SOLDER PASTE DETAIL  
TYPICAL

4221589/A 06/2014

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS82740ASIPR	ACTIVE	uSiP	SIP	9	3000	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E7 TXI7400EC	<span style="background-color: red; color: white;">Samples</span>
TPS82740ASIPT	ACTIVE	uSiP	SIP	9	250	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E7 TXI7400EC	<span style="background-color: red; color: white;">Samples</span>
TPS82740BSIPR	ACTIVE	uSiP	SIP	9	3000	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E8 TXI2740EC	<span style="background-color: red; color: white;">Samples</span>
TPS82740BSIPT	ACTIVE	uSiP	SIP	9	250	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E8 TXI2740EC	<span style="background-color: red; color: white;">Samples</span>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.



www.ti.com

## PACKAGE OPTION ADDENDUM


26-Aug-2014

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

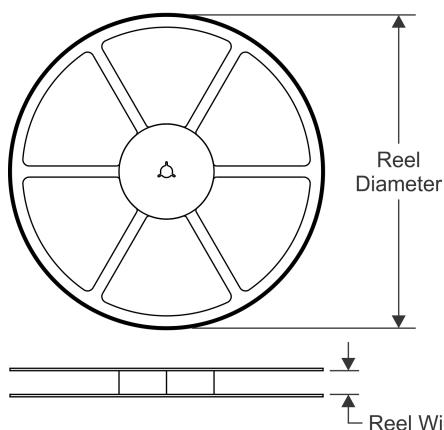


### TAPE DIMENSIONS

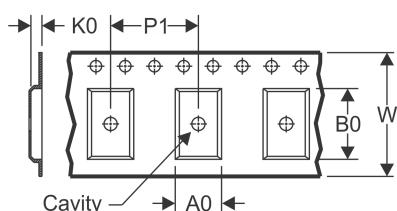

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

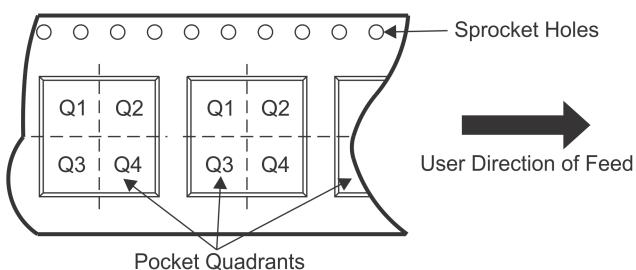

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS82740ASIPR	uSiP	SIP	9	3000	178.0	9.0	2.5	3.1	1.35	4.0	8.0	Q2
TPS82740BSIPR	uSiP	SIP	9	3000	178.0	9.0	2.5	3.1	1.35	4.0	8.0	Q2

## TAPE AND REEL BOX DIMENSIONS

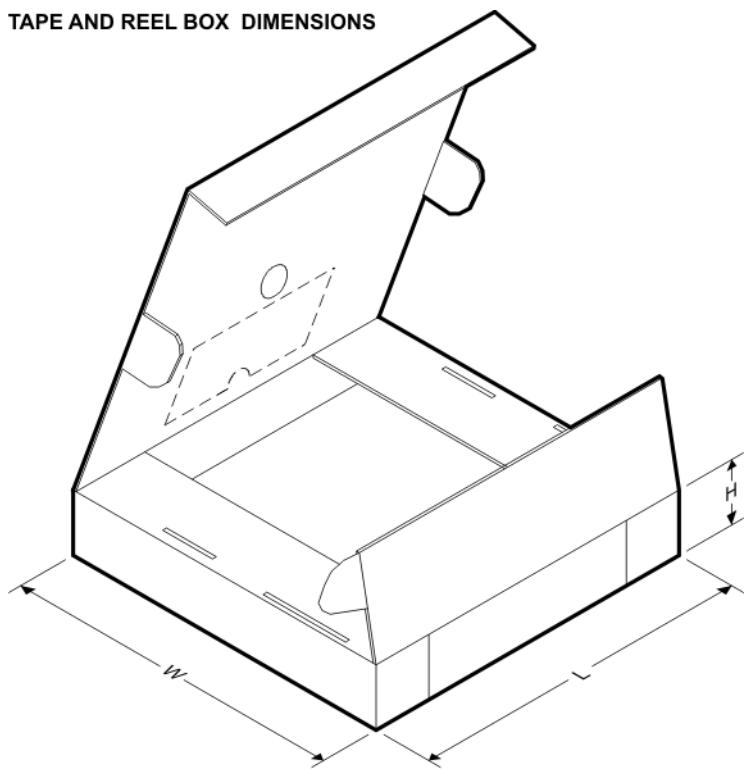

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS82740ASIPR	uSiP	SIP	9	3000	223.0	194.0	35.0
TPS82740BSIPR	uSiP	SIP	9	3000	223.0	194.0	35.0

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

<b>Products</b>	<b>Applications</b>		
Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>	Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>	Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>	Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>	<b>TI E2E Community</b>	
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>	<a href="http://e2e.ti.com">e2e.ti.com</a>	
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>		