Annular SH Series SH14-15-06-L-W4.5
MFG Part Number: 71092-501

Annular SH Series Thermoelectric Cooler

The SH14-15-06-L-W4.5 is an annular-style thermoelectric cooler. The hot and cold side ceramics have a circular hole in the center to accommodate light protrusion for optics, mechanical fastening or temperature probe. It has a maximum Qc of 5.8 Watts when ΔT = 0 and a maximum ΔT of 70.5 °C at Qc = 0.

Features

- Center Hole
- Precise Temperature Control
- No sound or vibration
- Reliable solid-state
- DC Operation
- RoHS-compliant

Applications

- Thermoelectric Coolers for Reagent Storage
- Thermoelectric Coolers for Handheld Cosmetic Lasers
- Cooling for Centrifuges
- Peltier Cooling for Machine Vision

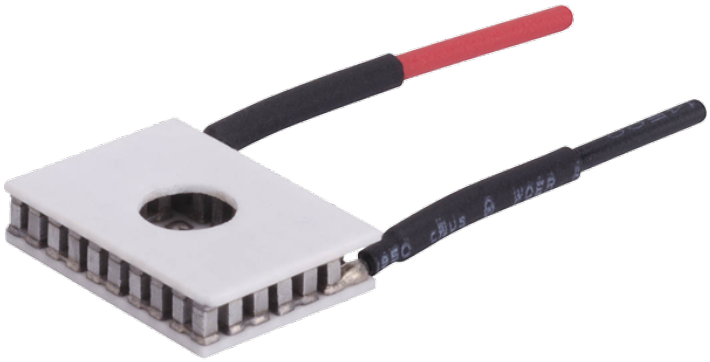

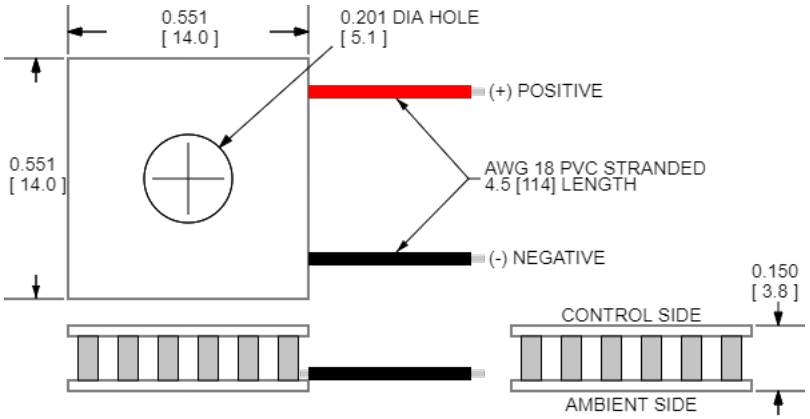

CERAMIC MATERIAL: Al_2O_3
SOLDER CONSTRUCTION: 138°C, BiSn

INCHES [MM]

ELECTRICAL AND THERMAL PERFORMANCE

For maximum performance, be sure to orient the CONTROL side of the TEC against the application to be managed and the AMBIENT side against the heat sink or other heat rejection method. The CONTROL side is always opposite the side with lead attachments. Lead attachment is a passive heat loss and less impactful if located on the side that attaches to the heat exchanger.

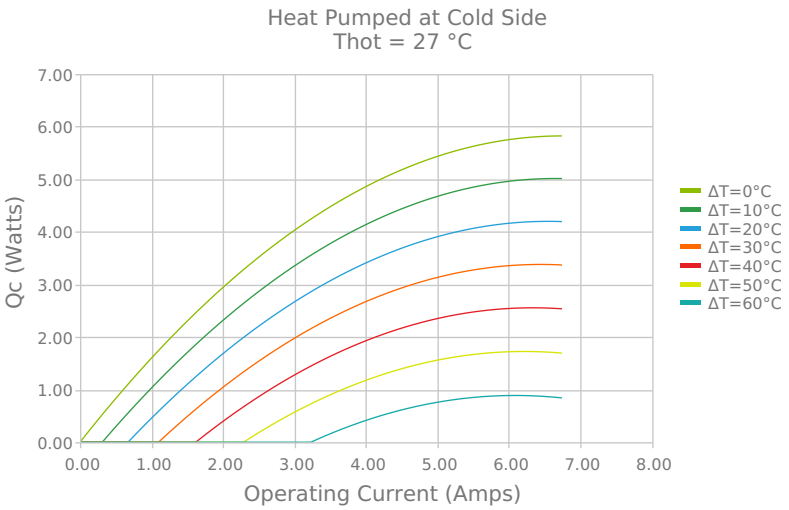

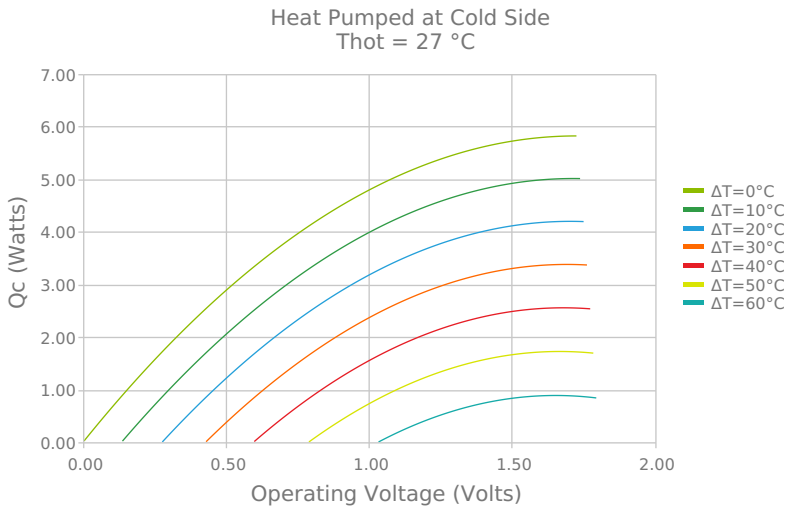

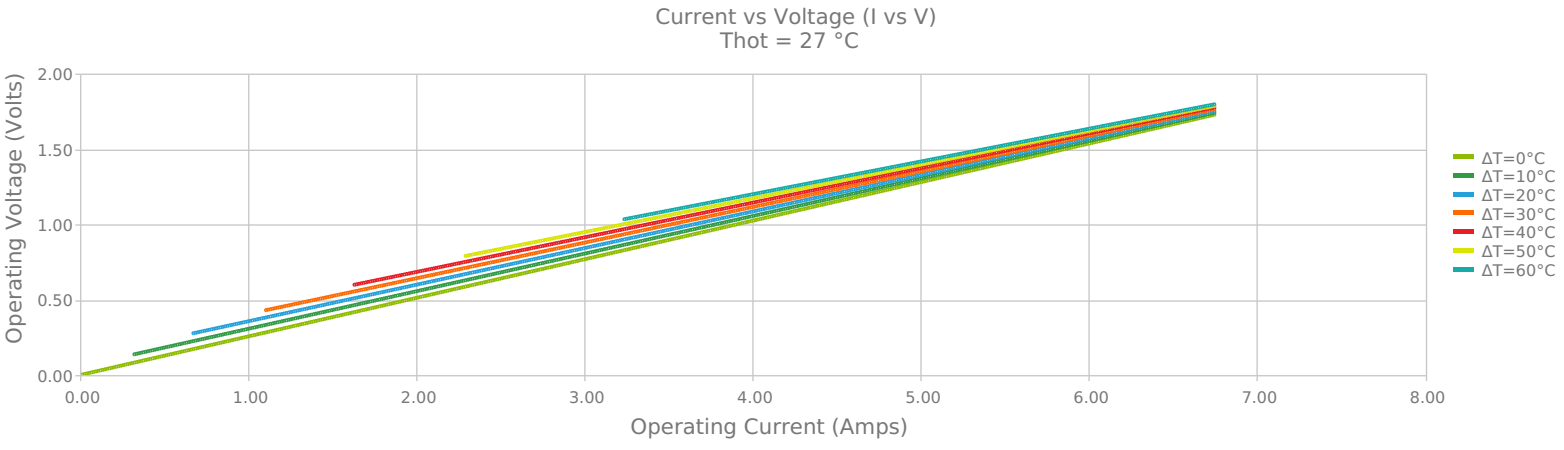

Coefficient of Performance (COP = Qc/Pin)
Thot = 27 °C

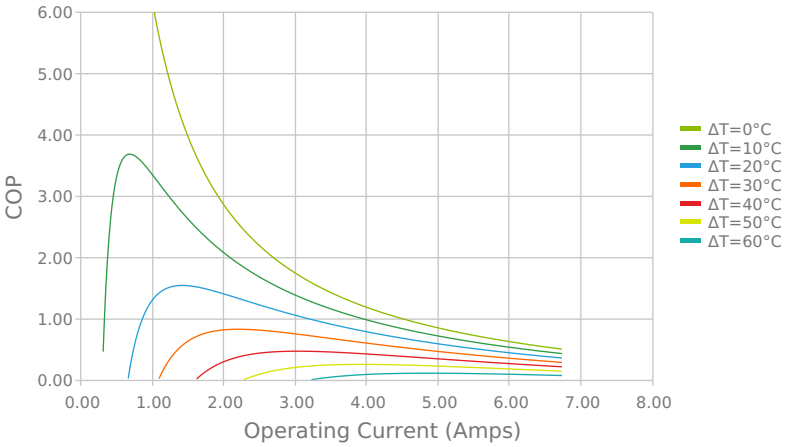

Coefficient of Performance (COP = Qc/Pin)
Thot = 27 °C

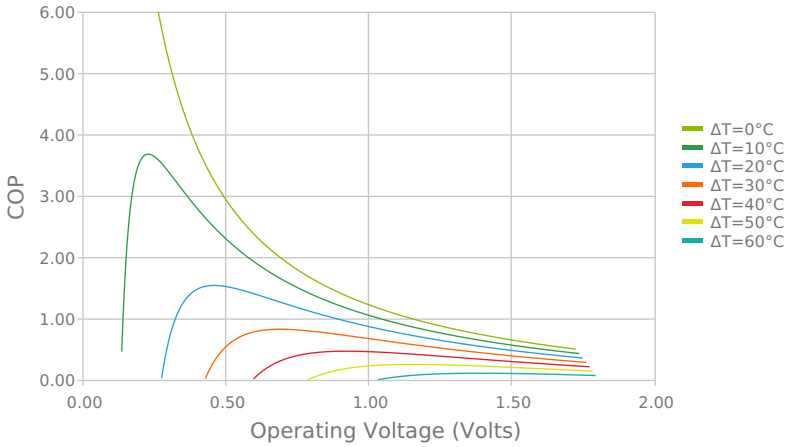

Total Heat Dissipated at Hot Side (Qh=Qc+Pin)
Thot = 27 °C

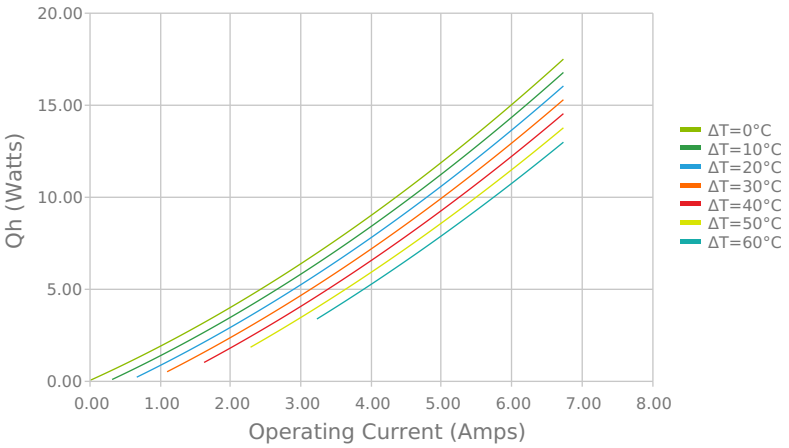

Total Heat Dissipated at Hot Side (Qh=Qc+Pin)
Thot = 27 °C

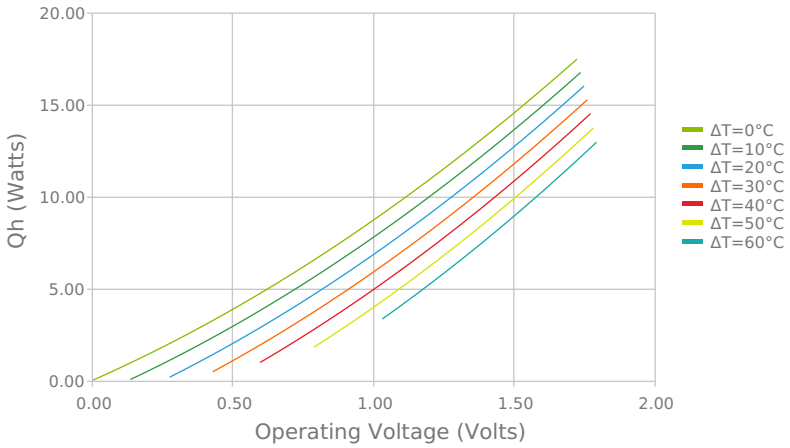

Heat Pumped at Cold Side (Qc)
Thot = 35 °C | Ioperating = 5.1 Amps

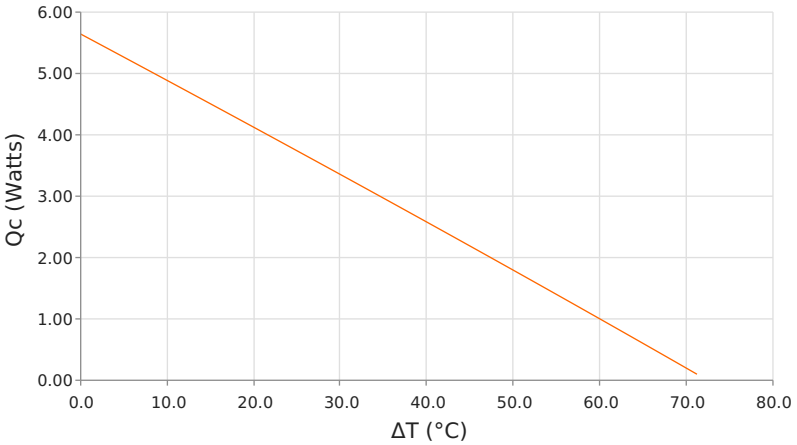

Coefficient of Performance (COP = Qc/Pin)
Thot = 35 °C | Ioperating = 5.1 Amps

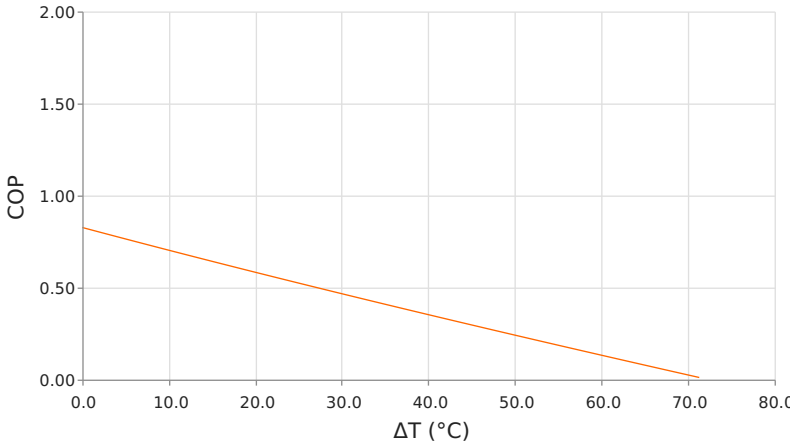

SPECIFICATIONS

Hot Side Temperature	27.0 °C	35.0 °C	50.0 °C
Qcmax (ΔT = 0)	5.8 Watts	6.0 Watts	6.3 Watts
ΔTmax (Qc = 0)	70.5°C	73.5°C	78.8°C
Imax (I @ ΔTmax)	6.0 Amps	5.9 Amps	5.9 Amps
Vmax (V @ ΔTmax)	1.6 Volts	1.7 Volts	1.8 Volts
Module Resistance	0.26 Ohms	0.27 Ohms	0.29 Ohms
Max Operating Temperature	80 °C		
Weight	5.0 gram(s)		

FINISHING OPTIONS

Suffix	Thickness	Flatness / Parallelism	Hot Face	Cold Face	Lead Length
L	3.810 ±0.254 mm 0.150 ± 0.0100 in	0.004 mm / 0.004 mm 0.00015 in / 0.00015 in	Lapped	Lapped	114.3 mm 4.50 in

SEALING OPTIONS

Suffix	Sealant	Color	Temp Range	Description
	None			No sealing specified

NOTES

1. Max operating temperature: 80°C
2. Do not exceed Imax or Vmax when operating module
3. Reference assembly guidelines for recommended installation
4. Solder tinning also available on metallized ceramics

Revision: 00 Date: 06-01-2022

Print Date: 03-26-2024