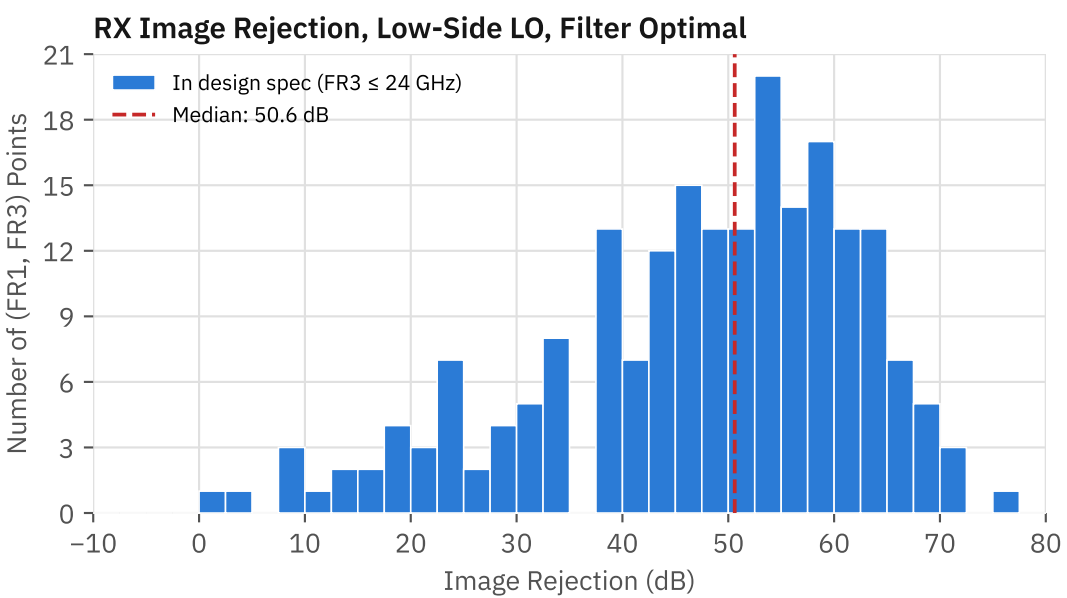
RX Image Rejection, Low-Side LO, Filter Optimal
In design spec (FR3 ≤ 24 GHz)
Median: 50.6 dB
Number of (FR1, FR3) Points
0
3
6
9
12
15
18
21
−10
0
10
20
30
40
50
60
70
80
Image Rejection (dB)