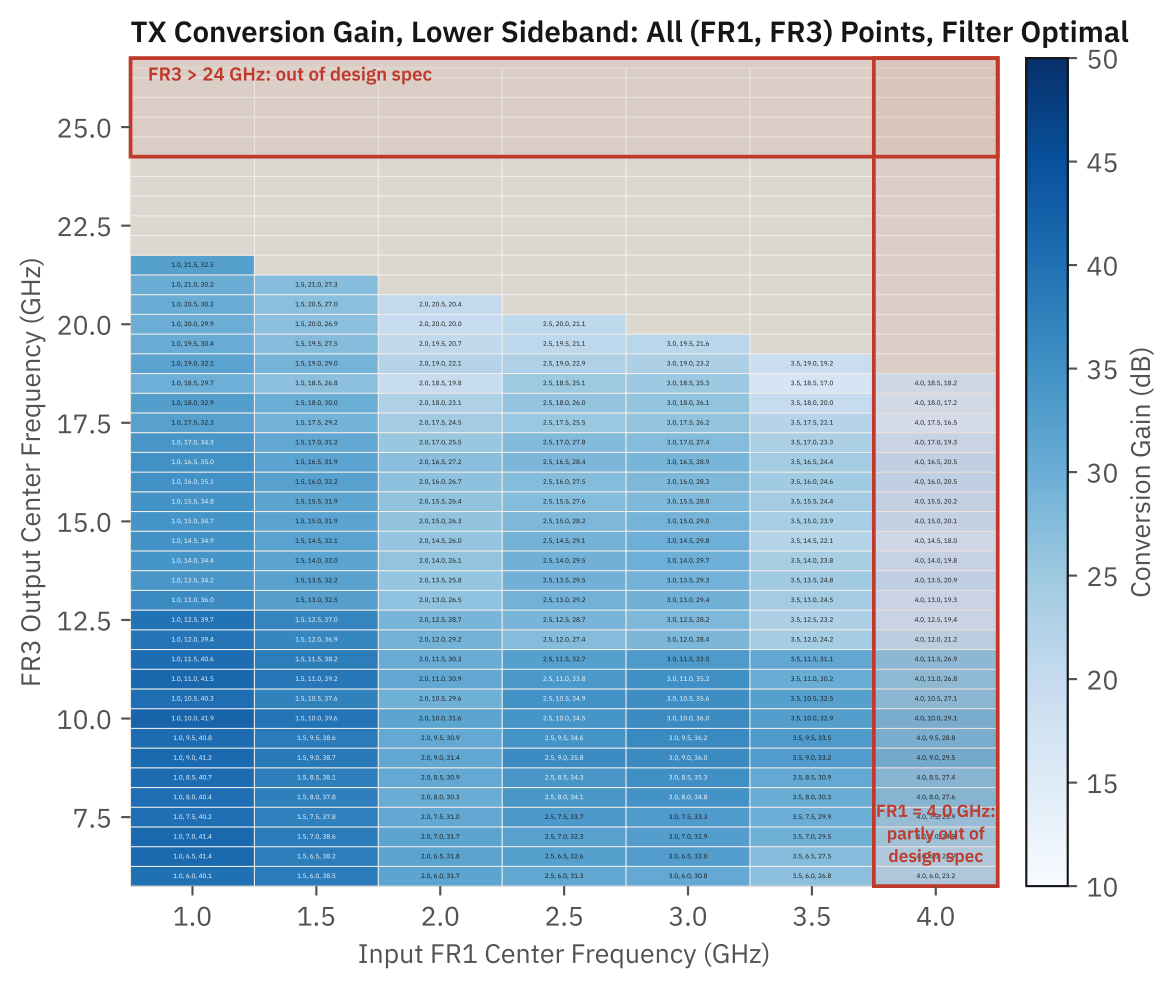
TX Conversion Gain, Lower Sideband: All (FR1, FR3) Points, Filter Optimal
FR3 > 24 GHz: out of design spec
FR1 = 4.0 GHz: partly out of design spec
FR3 Output Center Frequency (GHz)
25.0
22.5
20.0
17.5
15.0
12.5
10.0
7.5
Input FR1 Center Frequency (GHz)
1.0
1.5
2.0
2.5
3.0
3.5
4.0
Conversion Gain (dB)
50
45
40
35
30
25
20
15
10