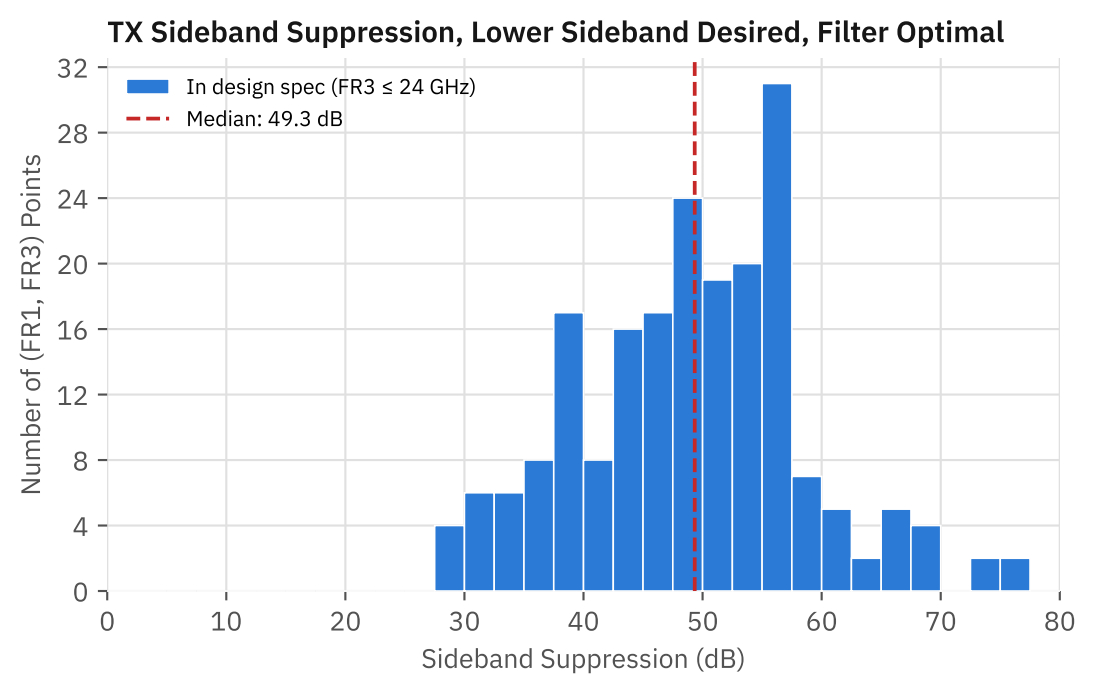
TX Sideband Suppression, Lower Sideband Desired, Filter Optimal
In design spec (FR3 ≤ 24 GHz)
Median: 49.3 dB
Number of (FR1, FR3) Points
Sideband Suppression (dB)
0
4
8
12
16
20
24
28
32
0
10
20
30
40
50
60
70
80