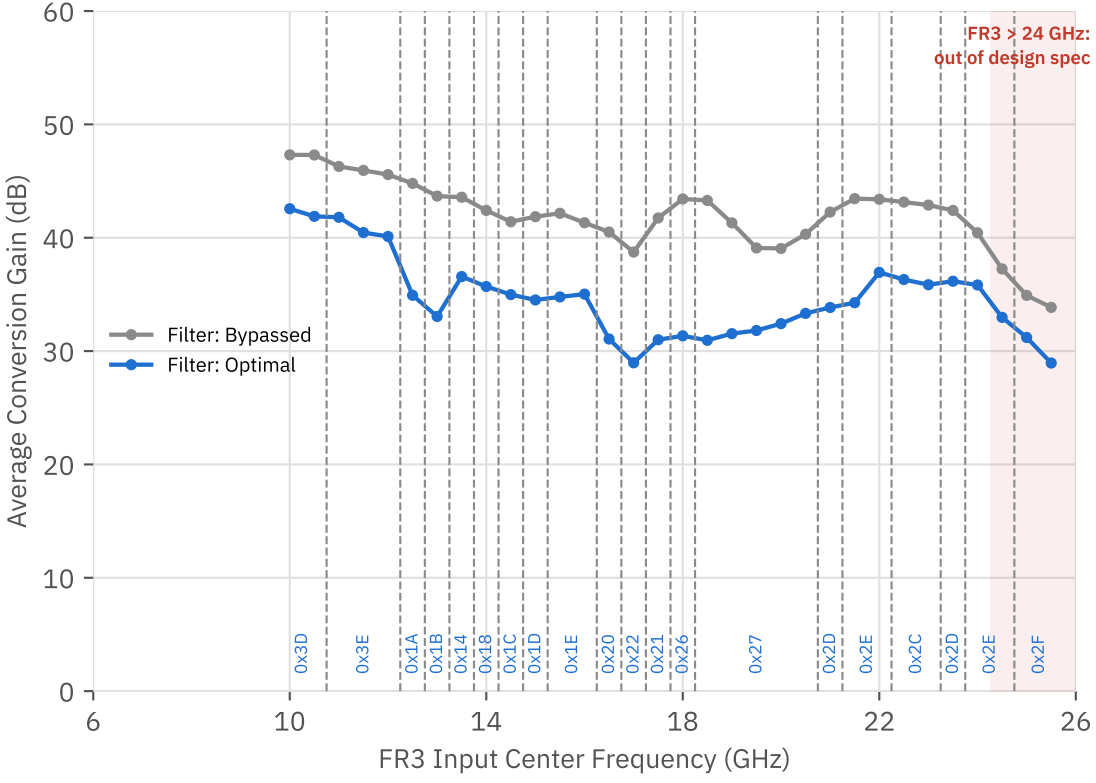
RX Conversion Gain, Low-Side LO: FR1 = 3 GHz
LO = FR3 − FR1
FR3 > 24 GHz:
out of design spec
Average Conversion Gain (dB)
FR3 Input Center Frequency (GHz)
Filter: Bypassed
Filter: Optimal
0x3D
0x3E
0x1A
0x1B
0x14
0x18
0x1C
0x1D
0x1E
0x20
0x22
0x21
0x26
0x27
0x2D
0x2E
0x2C
0x2D
0x2E
0x2F