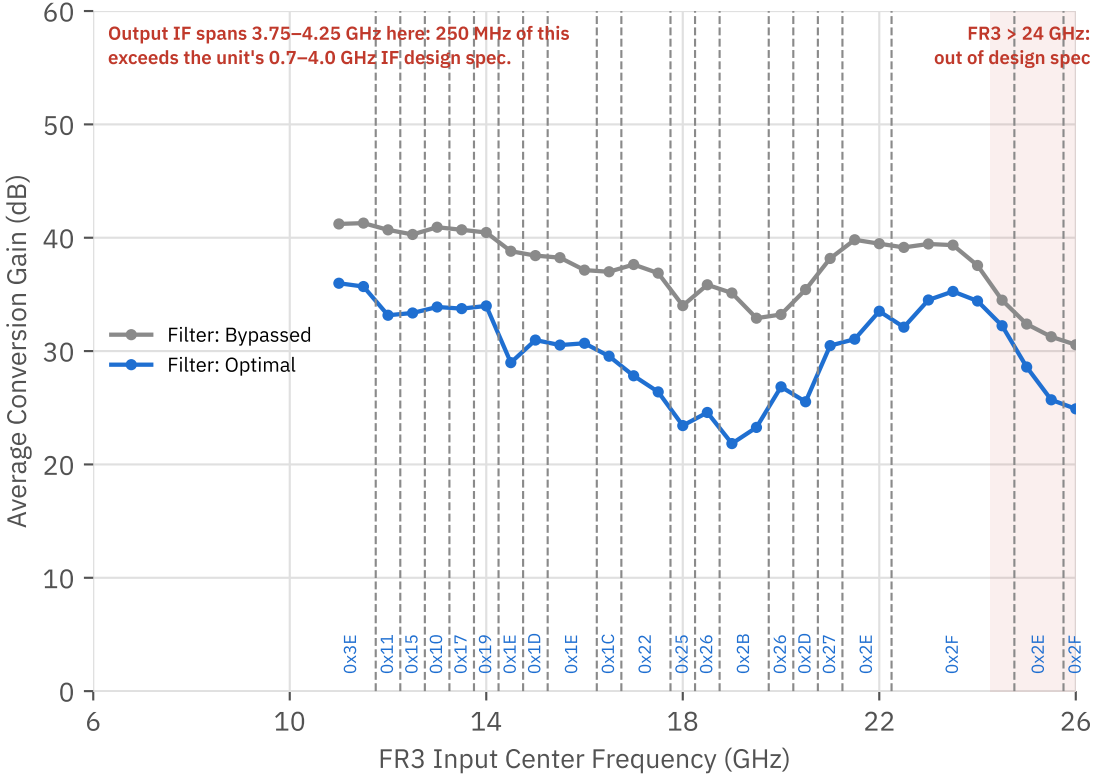
RX Conversion Gain, Low-Side LO: FR1 = 4 GHz
LO = FR3 − FR1
Output IF spans 3.75–4.25 GHz here: 250 MHz of this exceeds the unit's 0.7–4.0 GHz IF design spec.
FR3 > 24 GHz: out of design spec
Filter: Bypassed
Filter: Optimal
Average Conversion Gain (dB)
FR3 Input Center Frequency (GHz)
0
10
20
30
40
50
60
6
10
14
18
22
26
0x3E
0x11
0x15
0x10
0x17
0x19
0x1E
0x1D
0x1E
0x1C
0x22
0x25
0x26
0x2B
0x26
0x2D
0x27
0x2E
0x2F
0x2E
0x2F