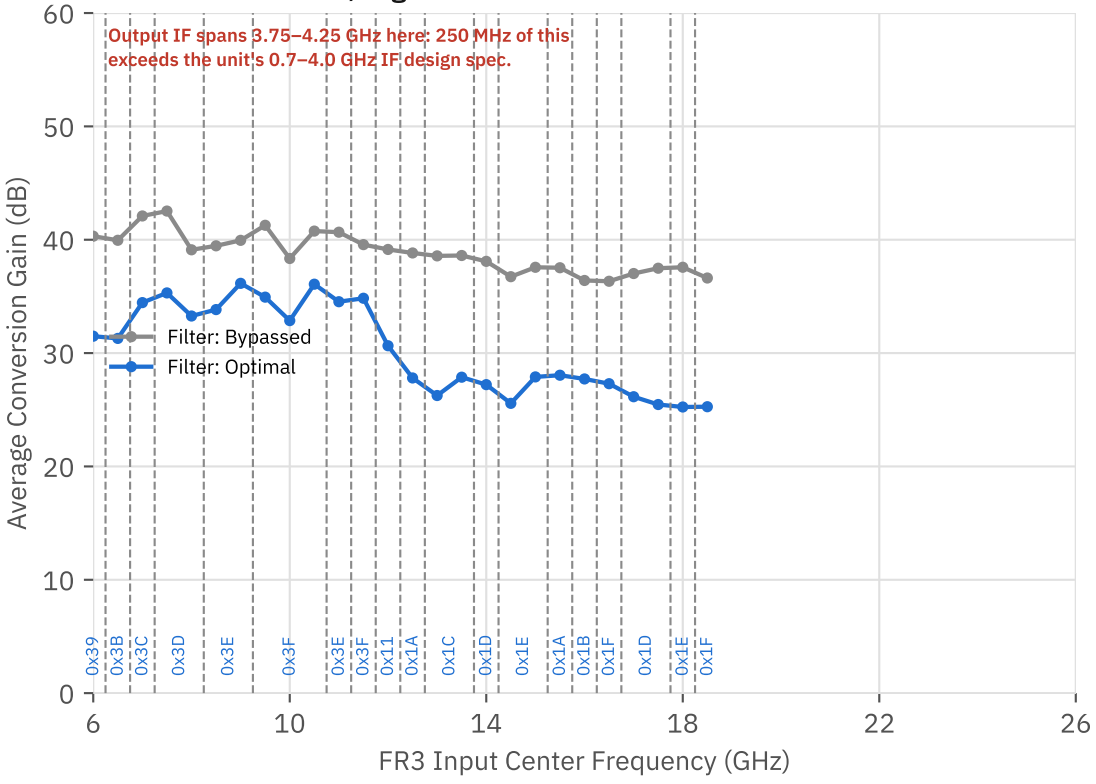
RX Conversion Gain, High-Side LO: FR1 = 4 GHz
LO = FR3 + FR1
Output IF spans 3.75–4.25 GHz here: 250 MHz of this exceeds the unit's 0.7–4.0 GHz IF design spec.
Filter: Bypassed
Filter: Optimal
Average Conversion Gain (dB)
FR3 Input Center Frequency (GHz)
0
10
20
30
40
50
60
6
10
14
18
22
26
0x39
0x3B
0x3C
0x3D
0x3E
0x3F
0x3E
0x3F
0x11
0x1A
0x1C
0x1D
0x1E
0x1A
0x1B
0x1F
0x1D
0x1E
0x1F