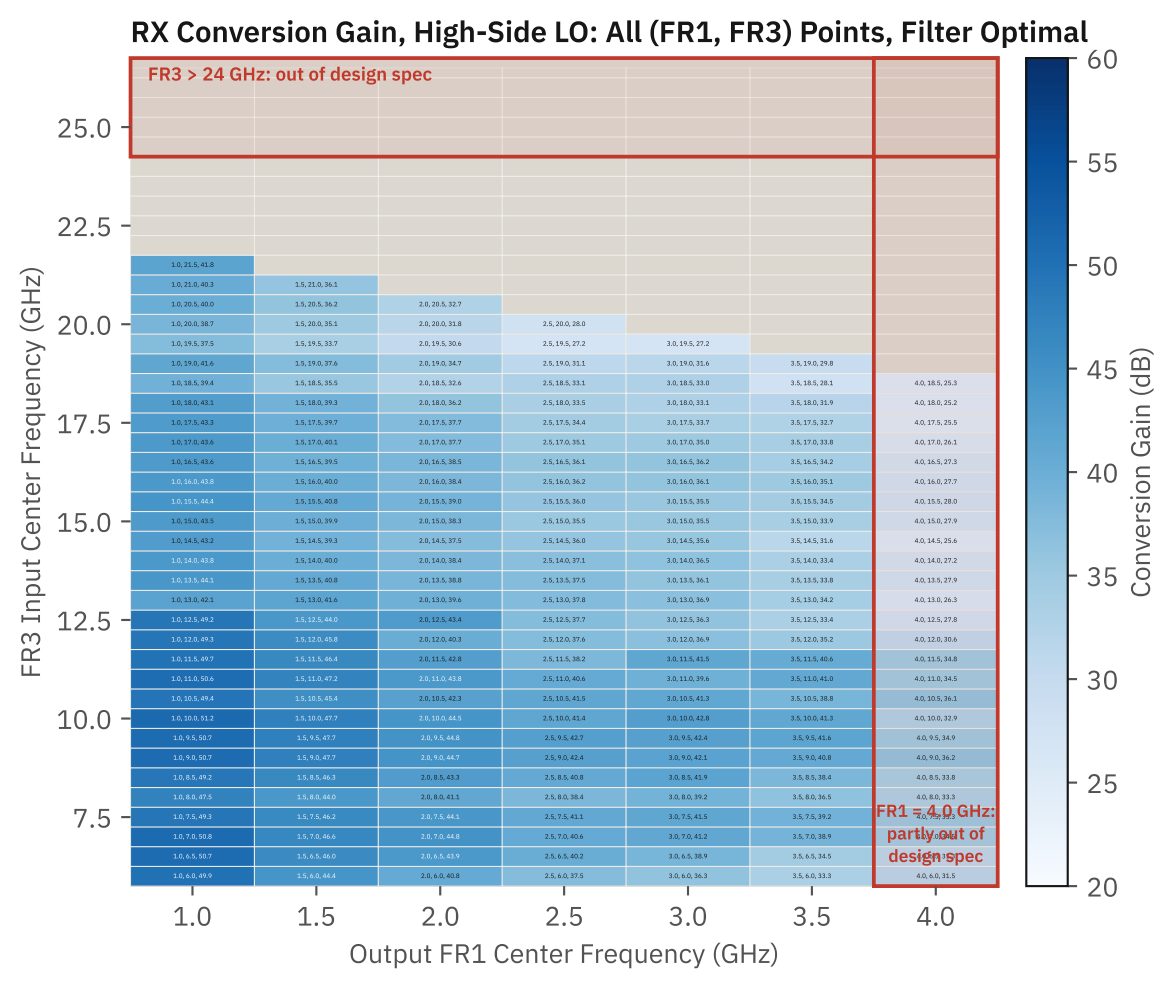
RX Conversion Gain, High-Side LO: All (FR1, FR3) Points, Filter Optimal
FR3 > 24 GHz: out of design spec
FR1 = 4.0 GHz: partly out of design spec
FR3 Input Center Frequency (GHz)
25.0
22.5
20.0
17.5
15.0
12.5
10.0
7.5
Output FR1 Center Frequency (GHz)
1.0
1.5
2.0
2.5
3.0
3.5
4.0
Conversion Gain (dB)
60
55
50
45
40
35
30
25
20