
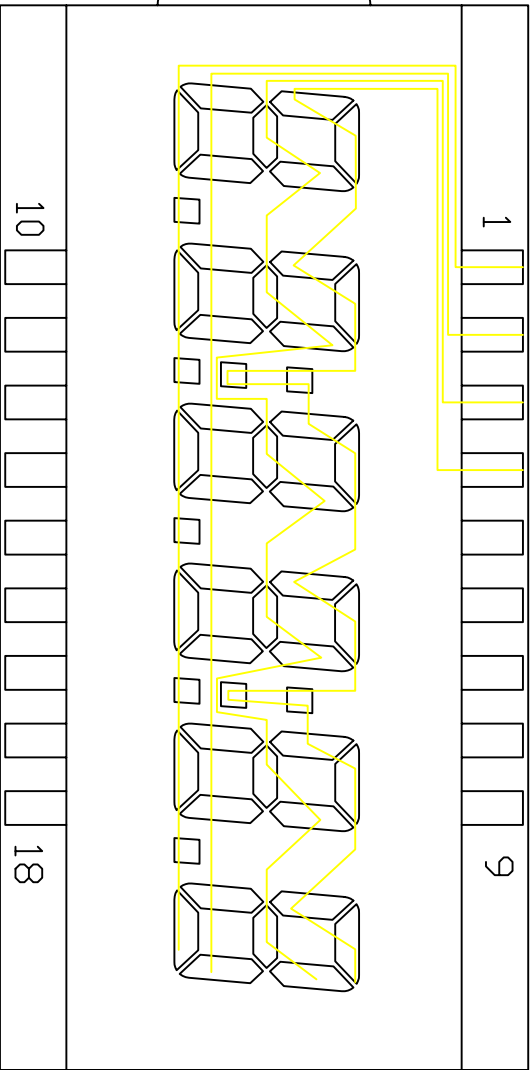
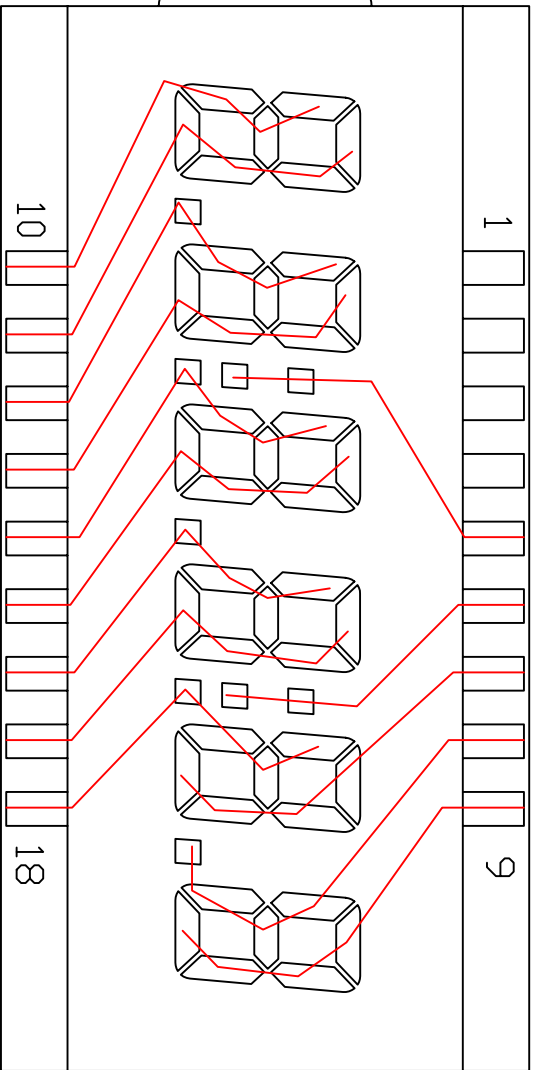


1. DISPLAY TYPE	TN,POSITIVE	7.DRIVE METHOD	1/4DUTY 1/3BIAS	REVISION RECDRD	REV								
2. VIEWING DIRECTION	6 0°CLOCK	8.OPERATING TEMP	0°C ~ 50°C	1	A	DRAWING NO.		45559		UNIT	mm	PRO (3)	
3. OPERATING VOLTAGE	3.6V (VDDF=1.2)	9.STORAGE TEMP	-10°C ~ 60°C	2		APPROVED BY		CHECKED BY	DRAWING BY		C.L.X	PAGE	
4. POLARIZER MODE:	REFLECTIVE	10.CONNECTOR	PIN	3								1/3	
5.DRIVER IC		11.GLASS SIZE	40*19.85/40*14.85	4									
6.PRINTING	NO	12.RDHS	符合“ROHS”要求	5					2007/11/27				




COM




SEG

REVISION RECORD			REV					
1			A					
2								
3								
4								
5								

DRAWING NO.		45559		UNIT	mm	PRO	(3)	
APPROVED BY		CHECKED BY		DRAWING BY		PAGE		

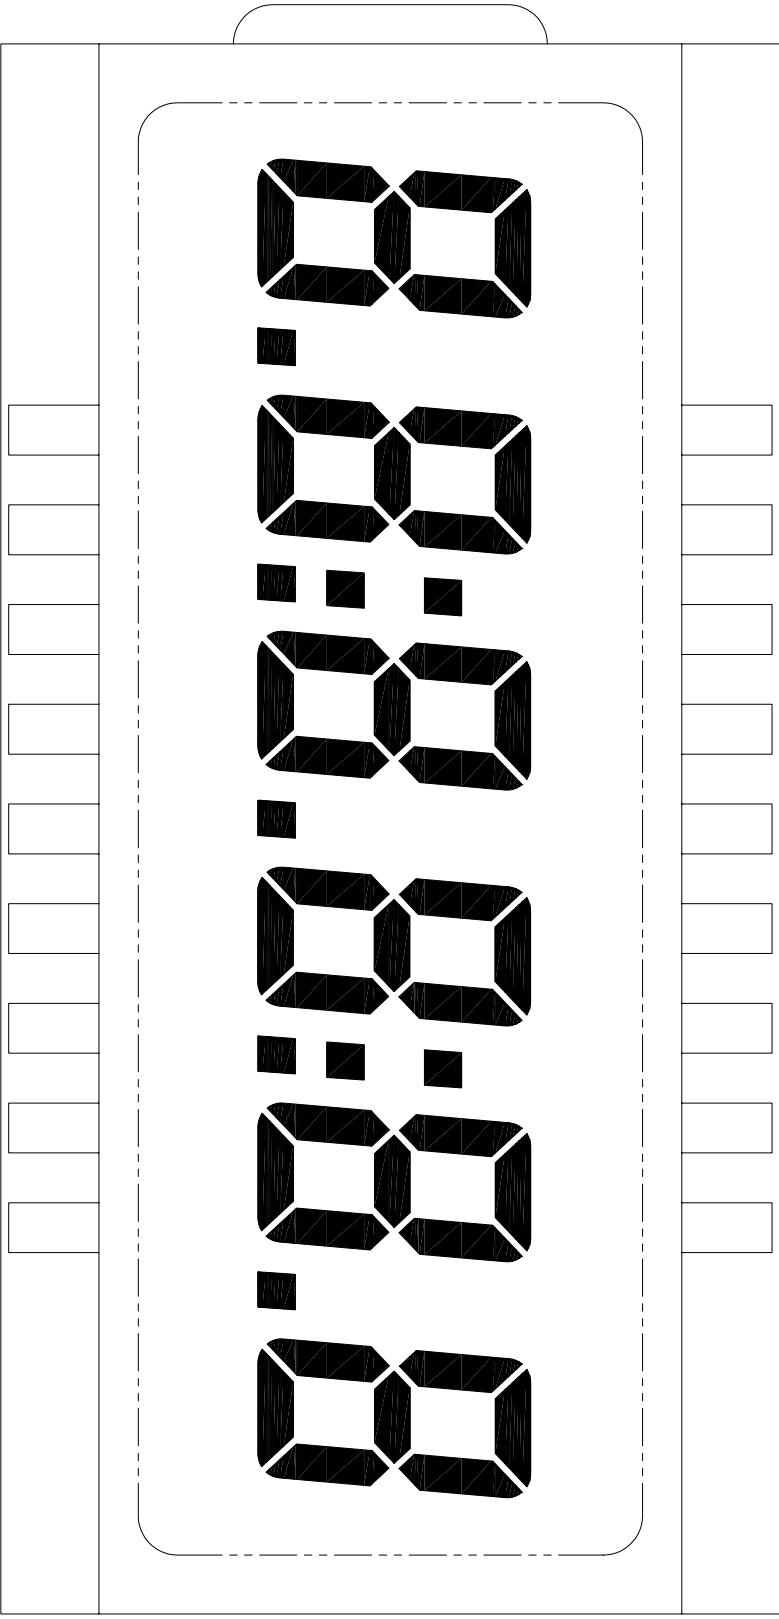

5:1显示效果图



1:1显示效果图

REVISION RECORD				REV				
1				A	DRAWING NO.			
2					45559			
3					APPROVED BY	CHECKED BY	DRAWING BY	PAGE
4								
5								
					UNIT mm		PRO (3)	
					CLX		2007/11/27	3 / 3