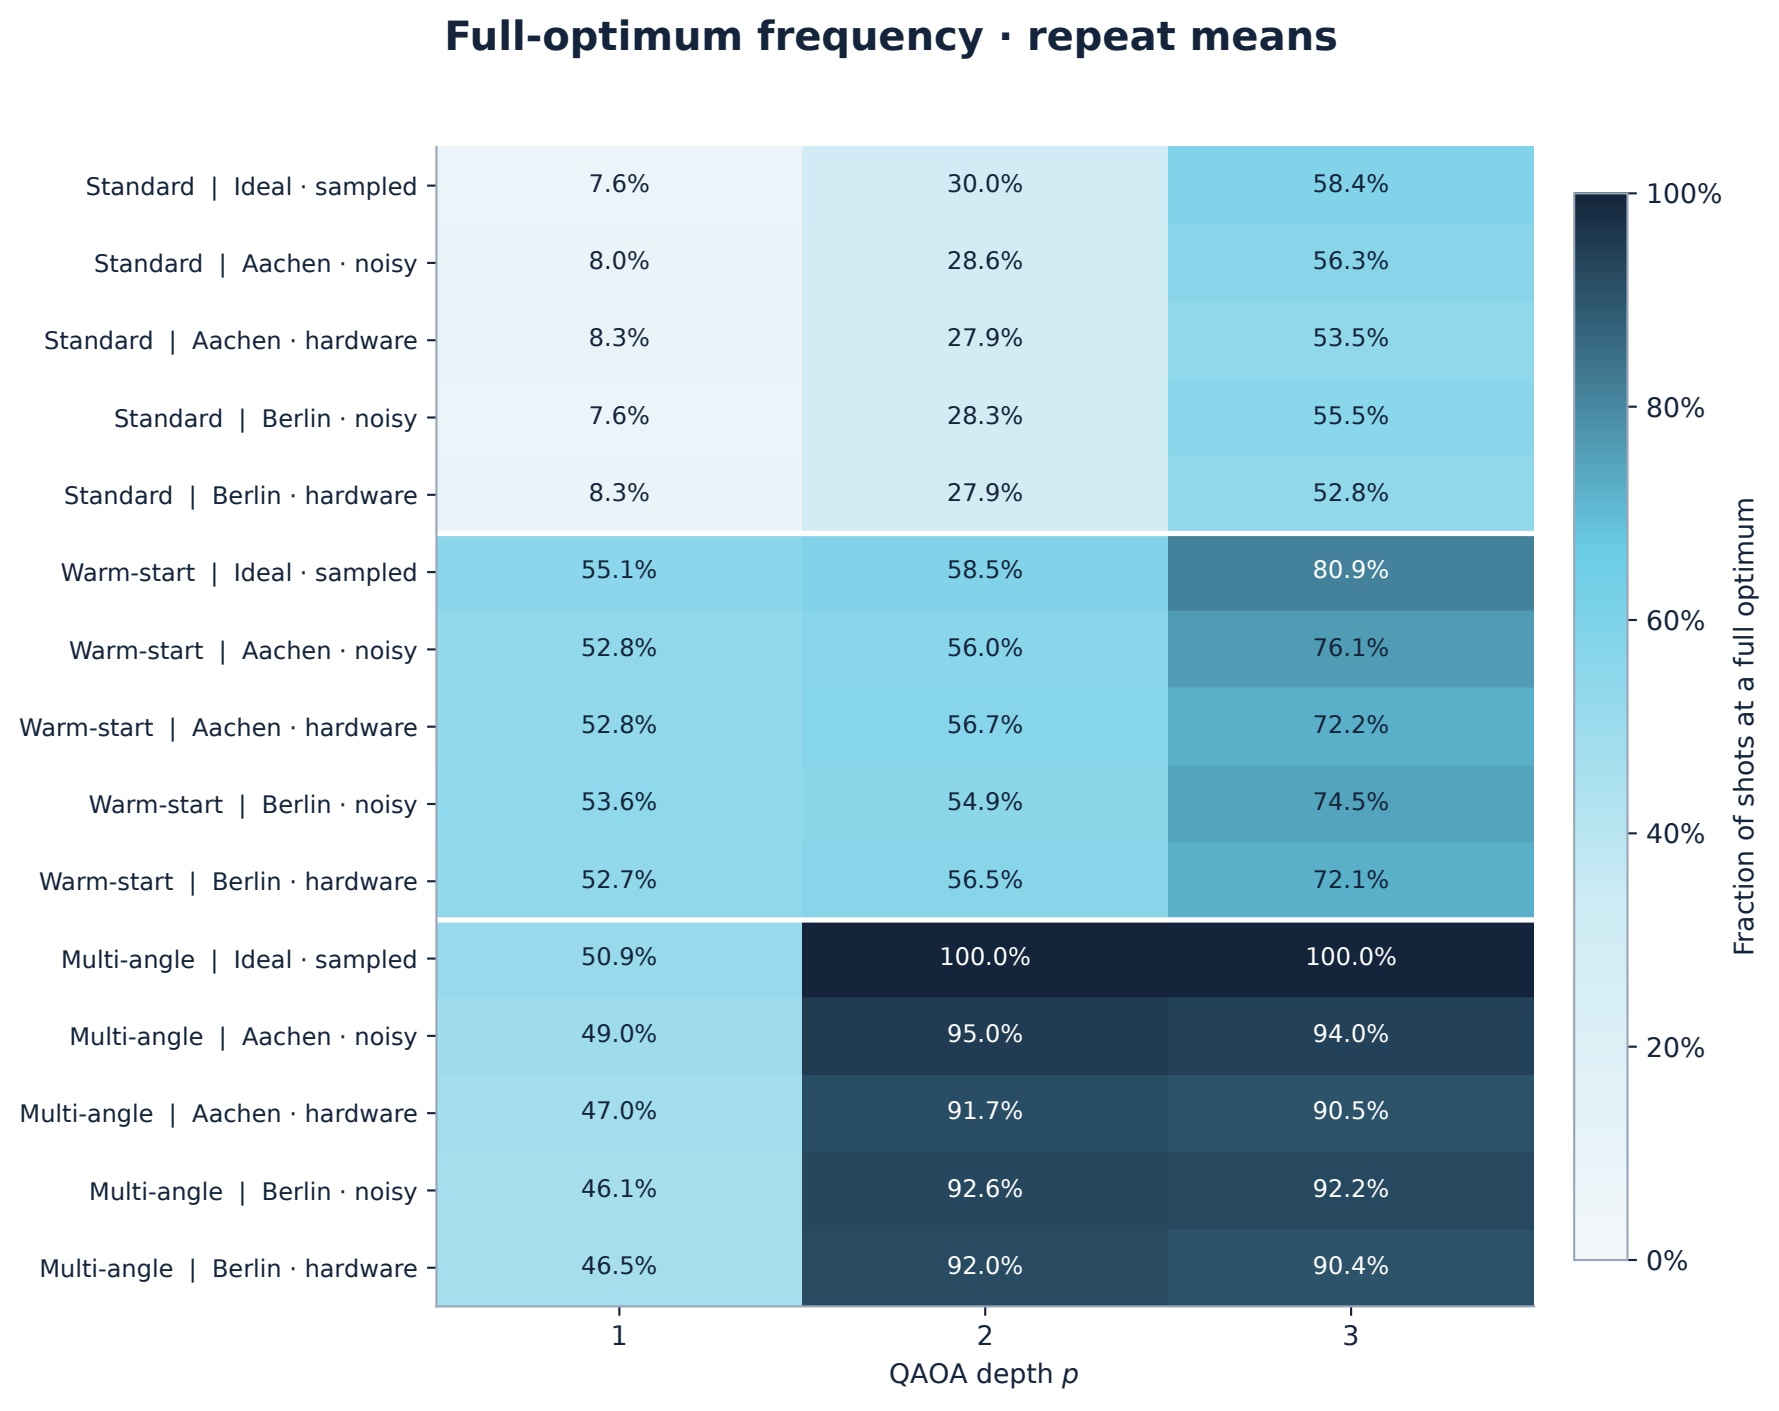

Full-optimum frequency · repeat means
Standard | Ideal · sampled
Standard | Aachen · noisy
Standard | Aachen · hardware
Standard | Berlin · noisy
Standard | Berlin · hardware
Warm-start | Ideal · sampled
Warm-start | Aachen · noisy
Warm-start | Aachen · hardware
Warm-start | Berlin · noisy
Warm-start | Berlin · hardware
Multi-angle | Ideal · sampled
Multi-angle | Aachen · noisy
Multi-angle | Aachen · hardware
Multi-angle | Berlin · noisy
Multi-angle | Berlin · hardware
7.6% 30.0% 58.4%
8.0% 28.6% 56.3%
8.3% 27.9% 53.5%
7.6% 28.3% 55.5%
8.3% 27.9% 52.8%
55.1% 58.5% 80.9%
52.8% 56.0% 76.1%
52.8% 56.7% 72.2%
53.6% 54.9% 74.5%
52.7% 56.5% 72.1%
50.9% 100.0% 100.0%
49.0% 95.0% 94.0%
47.0% 91.7% 90.5%
46.1% 92.6% 92.2%
46.5% 92.0% 90.4%
1
2
3
QAOA depth p
100%
80%
60%
40%
20%
0%
Fraction of shots at a full optimum