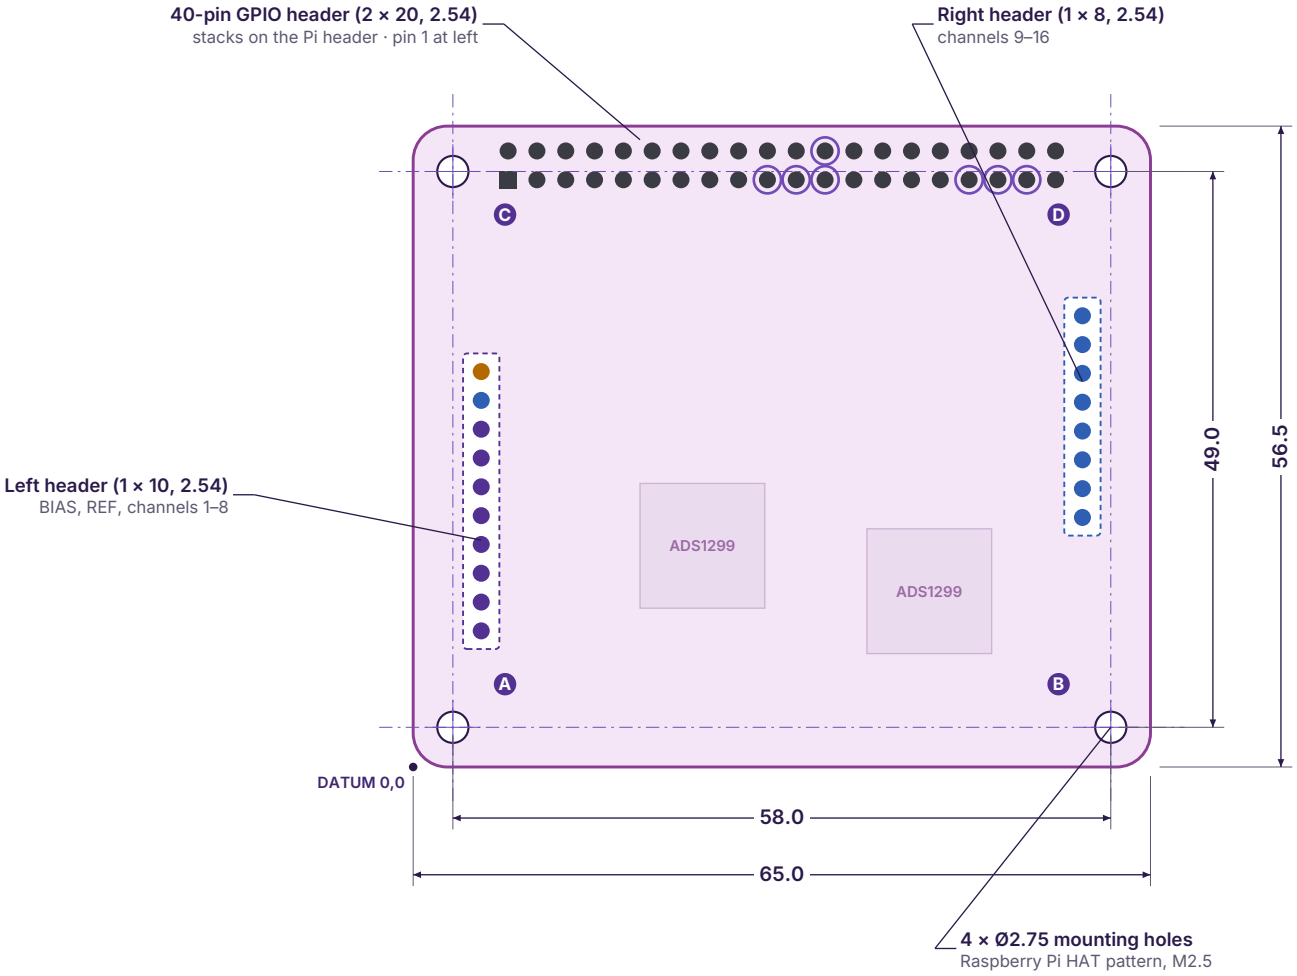


Mounting holes (nominal)

Hole	X	Y	Ø	Use
A	3.5	3.5	2.75	M2.5
B	61.5	3.5	2.75	M2.5
C	3.5	52.5	2.75	M2.5
D	61.5	52.5	2.75	M2.5

Notes


- Nominal outline and holes follow the Raspberry Pi HAT footprint (65 × 56.5 mm, 58 × 49 mm hole pattern).
- Holes are for M2.5 stand-offs; the shield stacks on the Pi's 40-pin header.
- Left header: BIAS, REF and channels 1–8. Right header: channels 9–16. 2.54 mm pitch.
- Header positions are shown for orientation (dashed zones). Exact connector coordinates are part of the production data, available to partners on request.
- Datum 0,0 at the lower-left corner; dimensions in mm.

Title	PiEEG-16 board outline & interfaces
Doc. No.	PE16-MD-002
Revision	Rev. A · 10 Nov 2026
Board	PiEEG-16 V1.1
Units	mm; datum lower-left corner
Scale	1.5 : 1 (A4 print)

For research and education only. Not a medical device. Specifications subject to change.

02 INTERFACE LOCATIONS

Interface	Location	Details
40-pin GPIO header	Top edge, HAT standard position	2 × 20, 2.54 mm, stacking; pin 1 at the left of the inner row
Left electrode header	Left edge, vertical	1 × 10, 2.54 mm: BIAS, REF, channels 1–8
Right electrode header	Right edge, vertical	1 × 8, 2.54 mm: channels 9–16
Mounting holes	Four corners	4 × Ø2.75 nominal, 58 × 49 mm
Status LEDs	Upper-left area	On when the shield is powered

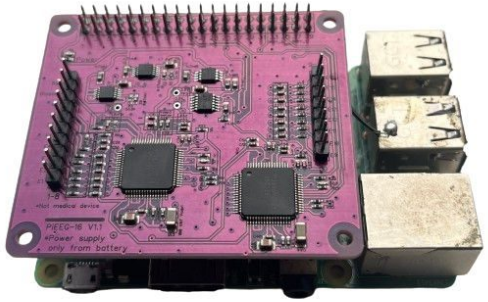

PiEEG-16 on a Raspberry Pi.



Pi 5 + PiEEG-16 in the printed case.

NOTE Stacking height.

The shield sits on a stacking header above the Pi's USB and Ethernet ports. The printed case (PE16-ENC-007) adds 6 mm of height for the shield.

CAUTION Handling.

Never fit or remove the shield while the Pi is powered. Press it on evenly so every pin is fully seated.

For research and education only. Not a medical device. Specifications subject to change.