

Digipot 10k MCP4018 breakout

solde.red/333091



Power LED




Default I2C address: 0x2F



VCC: 3.3V

PIN NAME
POWER SUPPLY PIN
GROUND
CONTROL
GPIO
ADC PIN
DAC PIN
SPI COMMUNICATION
UART COMMUNICATION
I2C COMMUNICATION
PWM CAPABILITY
OTHER
General info Warning!

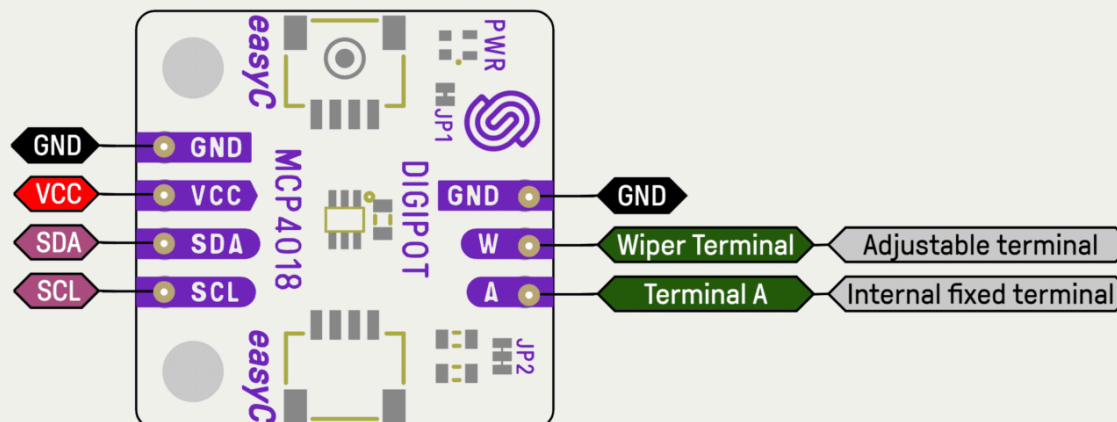

JP1(NC) - Disconnect PWR LED
JP2(NC) - 3.3V I2C pull resistors



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International (CC BY-SA 4.0). To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.



Soldered
www.soldered.com