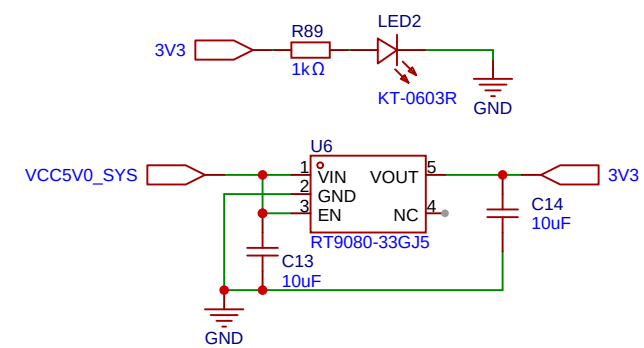


3V3 LDO + LED



USB-C conn.

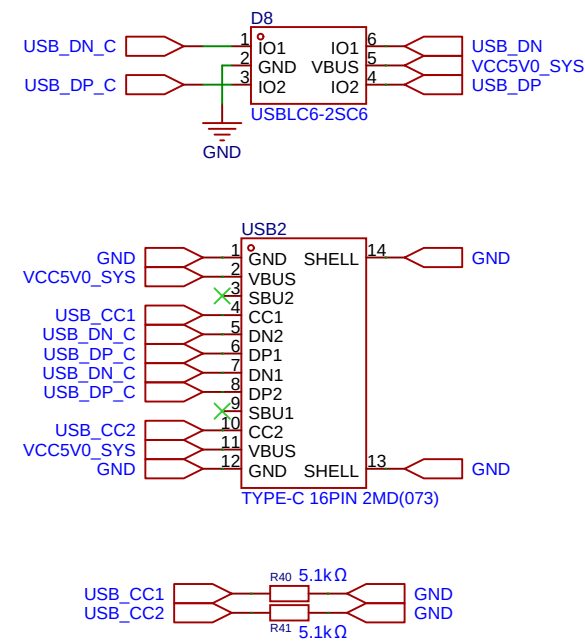
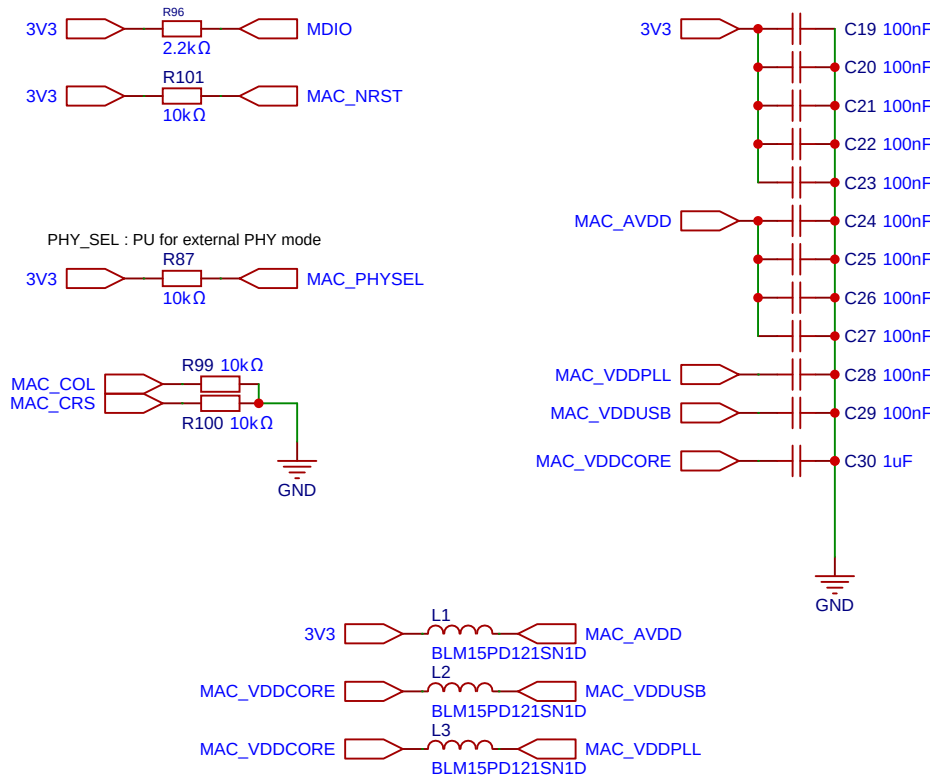
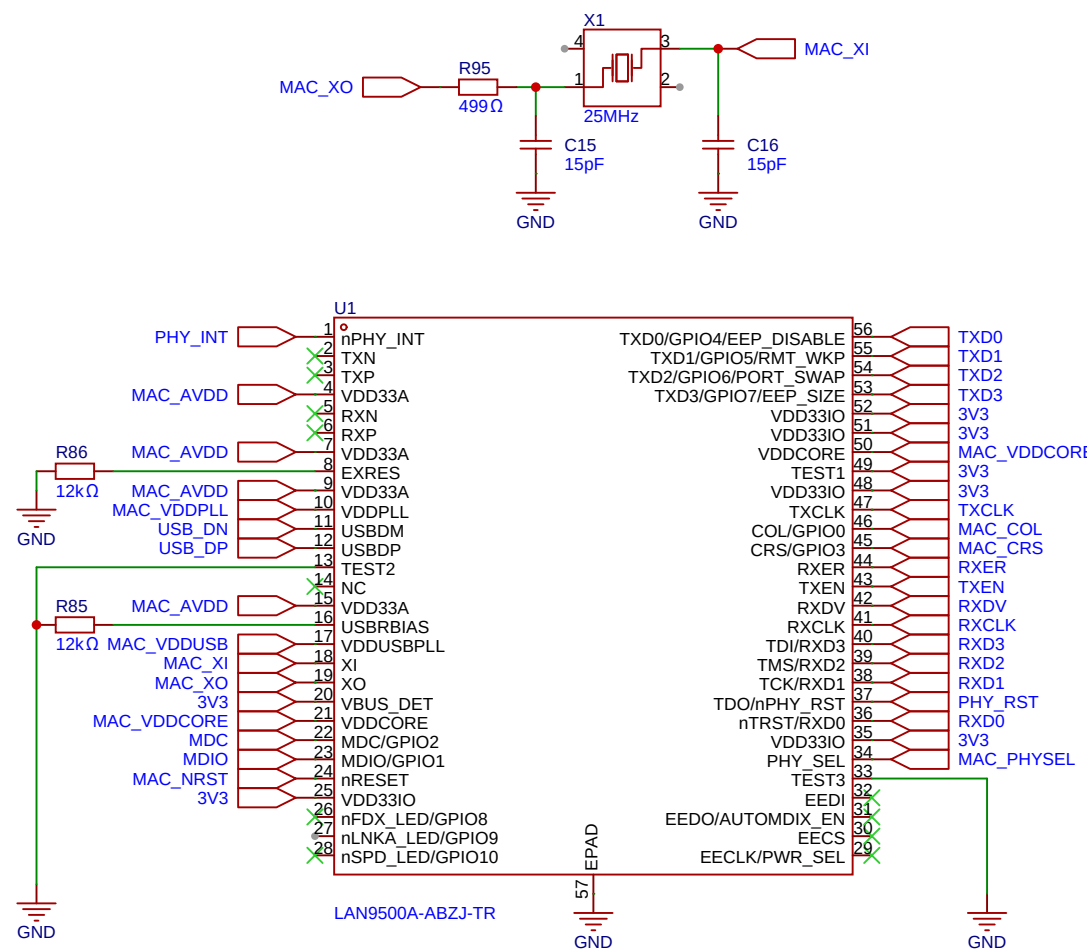
The diagram illustrates the pin connections for a USB-C connector. The connector is labeled "D8" and "USBLC6-25C6". The pins are connected as follows:

- Pin 1:** USB_DN_C
- Pin 2:** USB_DP_C
- Pin 3:** GND
- Pin 4:** GND
- Pin 5:** USB_DN
- Pin 6:** VCC5V0_SYS
- Pin 7:** USB_DP
- Pin 8:** GND
- Pin 9:** GND
- Pin 10:** GND
- Pin 11:** GND
- Pin 12:** GND
- Pin 13:** GND
- Pin 14:** GND
- Pin 15:** GND
- Pin 16:** GND

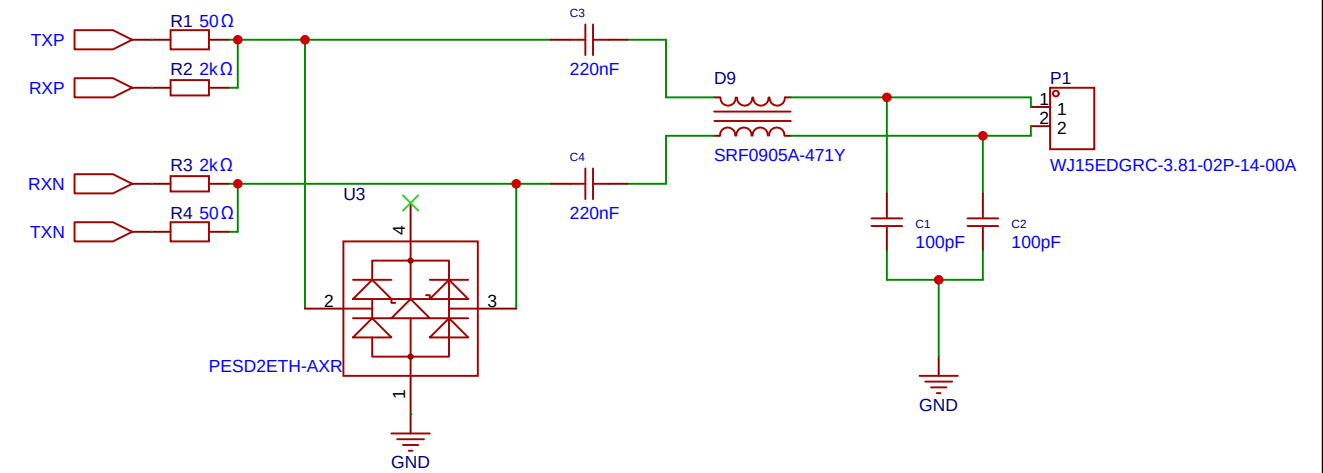
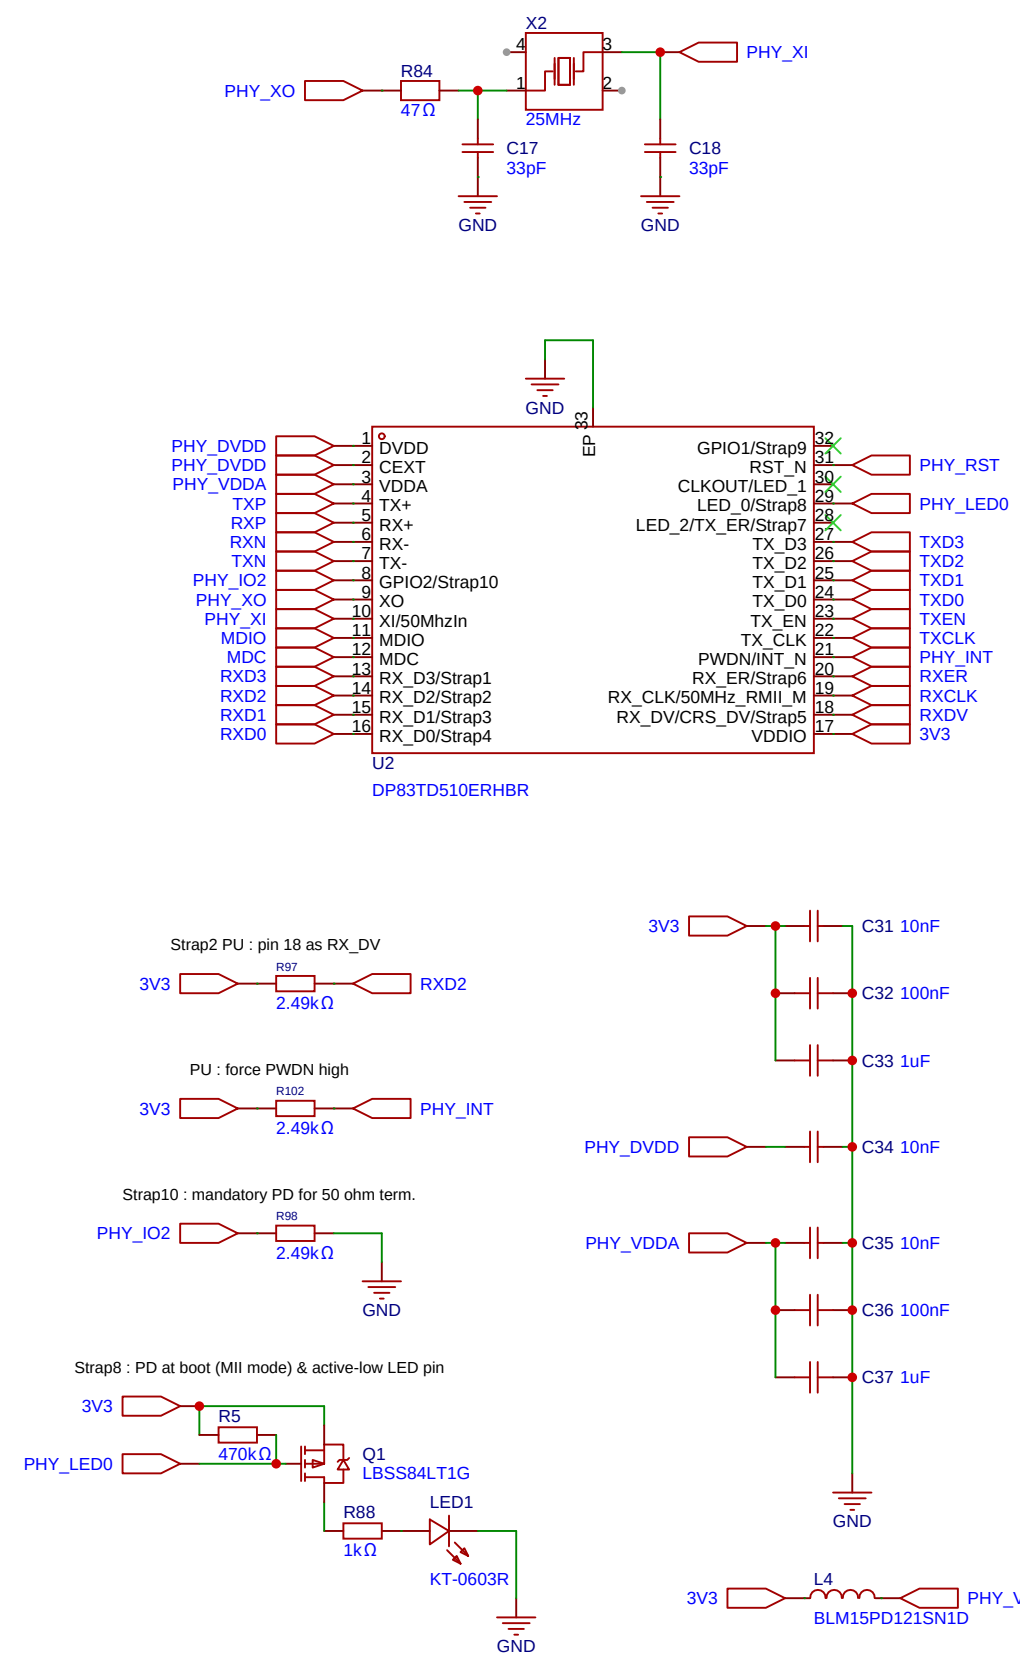
The connector is labeled "TYPE-C 16PIN 2MD(073)".

Below the connector, two resistors are shown:

- R40:** 5.1kΩ, connected between USB_CC1 and GND.
- R41:** 5.1kΩ, connected between USB_CC2 and GND.

[illegible]

SPE termination

[illegible]

Schematic	Schematic1			Update Date	2026-06-07
				Create Date	2026-05-28
Page	P1			Part Number	
Drawn	Pierre Jay	SPE 10BASE-T1L USB adapter			
Reviewed					
		VER	SIZE	PAGE	1 OF 1
		V1.0 R1	A4	EasyEDA.com	