ACAN_STM32 Arduino library
for Nucleo Boards
Version 1.0.3

Pierre Molinaro

November 19, 2024

Contents

1 Versions

Version	Date	Comment
1.0.3	November 22, 2024	Fixed call of `tryToSendReturnStatus` in `LoopBackDemo.ino` demo sketch (thanks to David Harris). Fixed `README.md`.
1.0.2	March 22, 2024	`CANMessage.h` –> `ACAN_STM32_CANMessage.h`.
1.0.1 rc1	August 20, 2023	Added compatibility with Generic F303K8TX?
1.0.0	March 17, 2022	Initial release.

2 Features

The `ACAN_STM32` library is a CAN (*Controller Area Network*) Controller driver for Nucleo boards.

This library is compatible with the `ACAN2515`[1], the `ACAN2515Tiny`[2] and the `ACAN2517`[3] libraries.

It has been designed to make it easy to start and to be easily configurable:

- default configuration sends and receives any frame – no default filter to provide;

- efficient built-in CAN bit settings computation from bit rates;

- user can fully define its own CAN bit setting values;

- up to 14 reception filters can be easily defined;

- reception filters accept callback functions;

- driver and controller transmit buffer sizes are customisable;

- driver and controller receive buffer size is customisable;

- overflow of the driver receive buffer is detectable;

- *internal loop back*, *external loop back*, *silent* controller modes are selectable.

3 Supported boards

Currently, two boards are supported (table 2). `CAN_CLOCK_FREQUENCY` is the the `bxCAN` module internal clock frequency.

---

[1]https://github.com/pierremolinaro/acan2515
[2]https://github.com/pierremolinaro/acan2515Tiny
[3]https://github.com/pierremolinaro/acan2517

Nucleo 32 Board	Variable	TxCAN	RxCAN	CAN_CLOCK_FREQUENCY
NUCLEO–F303K8	can	PA12 == D2	PA11 == D3	32 MHz
NUCLEO–L432KC	can	PA12 == D2	PA11 == D3	80 MHz

Table 2 – Nucleo 32 supported boards

4   Data flow

The figure 1 illustrates default message flow of sending and receiving CAN messages.
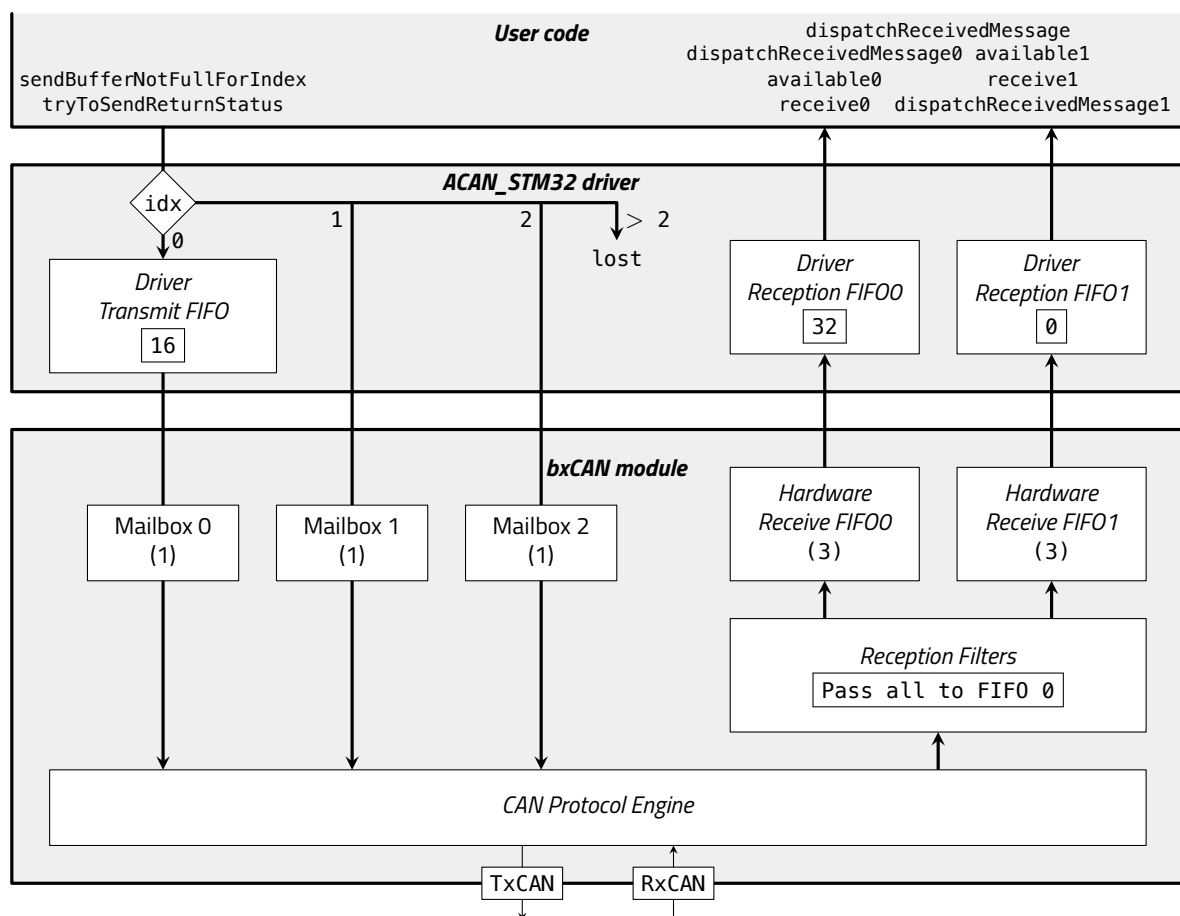
Figure 1 – Message flow in ACAN_STM32 driver and bxCAN module, default configuration

Sending messages. The ACAN_STM32 driver defines a *driver transmit FIFO* (default size: 16 messages), and 3 individual Mailboxes whose capacity is one message.

A message is defined by an instance of the CANMessage class. For sending a message, user code calls the tryToSendReturnStatus method – see section 11 page 10 for details, and the idx property of the sent message should be:

- 0 (default value), for sending via *driver transmit FIFO* and *Mailbox 0*;

- 1, for sending via *Mailbox 1*;

- 2, for sending via *Mailbox 2*.

If the `idx` property is greater than 2, the message is lost.

You can call the `sendBufferNotFullForIndex` method ([section 11.1 page 11](#)) for testing if a send buffer is not full.

Receiving messages. The *CAN Protocol Engine* transmits all correct frames to the *reception filters*. By default, they are configured as pass-all to `FIFO0`, see [section 13 page 14](#) for configuring them. Messages that pass the filters are stored in the *Hardware Reception FIFO0* or in the *Hardware Reception FIFO1*. A hardware reception FIFO has a capacity of 3 messages. The interrupt service routine transfers the messages from the FIFOi to the *Driver Receive FIFOi*. The size of the *Driver Receive FIFO 0* is 10 by default – see [section 12.1 page 13](#) for changing the default value. Seven user methods are available:

- the `available0` method returns `false` if the *Driver Receive FIFO0* is empty, and `true` otherwise;

- the `receive0` method retrieves messages from the *Driver Receive FIFO0* – see [section 12 page 12](#);

- the `available1` method returns `false` if the *Driver Receive FIFO1* is empty, and `true` otherwise;

- the `receive1` method retrieves messages from the *Driver Receive FIFO1* – see [section 12 page 12](#);

- the `dispatchReceivedMessage` method, see [section 14 page 18](#);

- the `dispatchReceivedMessage0` method, see [section 15 page 19](#);

- the `dispatchReceivedMessage1` method, see [section 16 page 20](#).

5   A sample sketch: `LoopBackDemo`

The `LoopBackDemo` sketch is a sample code for introducing the `ACAN_STM32` library. It demonstrates how to configure the library, to send a CAN message, and to receive a CAN message.

Note: this code runs without any CAN connection, the `CAN` module is configured in `EXTERNAL_LOOP_BACK` mode (see [section 18.10.1 page 28](#)).

`ACAN_STM32` inclusion.

```
#include <ACAN_STM32.h>
```

The `setup` function.

```
void setup () {
//--- Switch on builtin led
  pinMode (LED_BUILTIN, OUTPUT) ;
//--- Start serial
  Serial.begin (115200) ;
//--- Wait for serial (blink led at 10 Hz during waiting)
  while (!Serial) {
    delay (50) ;
```

```
    digitalWrite (LED_BUILTIN, !digitalRead (LED_BUILTIN)) ;
  }
```

Builtin led is used for signaling. It blinks led at 10 Hz during until serial monitor is ready.

```
  ACAN_STM32_Settings settings (125 * 1000) ;
```

Configuration is a four-step operation. This line is the first step. It instanciates the `settings` object of the `ACAN_STM32_Settings` class. The constructor has one parameter: the desired CAN bit rate (here, 125 kbit/s). It returns a `settings` object fully initialized with CAN bit settings for the desired bit rate, and default values for other configuration properties.

```
settings.mModuleMode = ACAN_STM32_Settings::EXTERNAL_LOOP_BACK ;
```

This is the second step. You can override the values of the properties of `settings` object. Here, the `mModuleMode` property is set to `EXTERNAL_LOOP_BACK` – its value is `NORMAL` by default. Setting this property enables *external loop back*, that is you can run this demo sketch even it you have no connection to a physical CAN network. The lists all properties you can override.

```
  const uint32_t errorCode = can.begin () ;
```

This is the third step, configuration of the `CAN` driver with `settings` values. The driver is configured for being able to send any (standard / extended, data / remote) frame, and to receive all (standard / extended, data / remote) frames. If you want to define reception filters, see .

```
  if (errorCode != 0) {
    Serial.print ("Configuration error 0x") ;
    Serial.println (errorCode, HEX) ;
  }
```

Last step: the configuration of the `can` driver returns an error code, stored in the `errorCode` constant. It has the value 0 if all is ok – see .

The global variables.

```
static uint32_t gSendDate = 0 ;
static uint32_t gSentCount = 0 ;
static uint32_t gReceivedCount = 0 ;
```

The `gBlinkDate` global variable is used for sending a CAN message every second. The `gSentCount` global variable counts the number of sent messages. The `gReceivedCount` global variable counts the number of sucessfully received messages.

The `loop` function.

```
void loop () {
  CANMessage message ;
  if (gSendDate < millis ()) {
    message.id = 0x542 ;
    message.len = 8 ;
    message.data [0] = 0 ;
```

```
    message.data [1] = 1 ;
    message.data [2] = 2 ;
    message.data [3] = 3 ;
    message.data [4] = 4 ;
    message.data [5] = 5 ;
    message.data [6] = 6 ;
    message.data [7] = 7 ;
    const bool ok = can.tryToSendReturnStatus (message) ;
    if (ok) {
      digitalWrite (LED_BUILTIN, !digitalRead (LED_BUILTIN)) ;
      gSendDate += 1000 ;
      gSentCount += 1 ;
      Serial.print ("Sent:␣") ;
      Serial.println (gSentCount) ;
    }
  }
  if (can.receive0 (message)) {
    gReceivedCount += 1 ;
    Serial.print ("Received:␣") ;
    Serial.println (gReceivedCount) ;
  }
}
```

6 The CANMessage class

Note. The CANMessage class is declared in the CANMessage.h header file. The class declaration is protected by an include guard that causes the macro GENERIC_CAN_MESSAGE_DEFINED to be defined. The ACAN2515 driver[4], the ACAN2517 driver[5] and the ACAN2517FD driver[6] contain an identical CANMessage.h header file, enabling using the ACAN_STM32 driver, the ACAN2515 driver, ACAN2517 driver and ACAN2517FD driver in a same sketch.

A *CAN message* is an object that contains all CAN 2.0B frame user informations. All properties are initialized by default, and represent a base data frame, with an identifier equal to 0, and without any data.

```
class CANMessage {
  public : uint32_t id = 0 ;   // Frame identifier
  public : bool ext = false ;  // false -> standard frame, true -> extended frame
  public : bool rtr = false ;  // false -> data frame, true -> remote frame
  public : uint8_t idx = 0 ;   // This field is used by the driver
  public : uint8_t len = 0 ;   // Length of data (0 ... 8)
  public : union {
    uint64_t data64        ; // Caution: subject to endianness
```

---

[4]The ACAN2515 driver is a CAN driver for the MCP2515 CAN controller, https://github.com/pierremolinaro/acan2515.
[5]The ACAN2517 driver is a CAN driver for the MCP2517FD CAN controller in CAN 2.0B mode, https://github.com/pierremolinaro/acan2517.
[6]The ACAN2517FD driver is a CANFD driver for the MCP2517FD CAN controller in CANFD mode, https://github.com/pierremolinaro/acan2517FD.

```
    int64_t  data_s64     ; // Caution: subject to endianness
    uint32_t data32    [2] ; // Caution: subject to endianness
    int32_t  data_s32  [2] ; // Caution: subject to endianness
    float    dataFloat [2] ; // Caution: subject to endianness
    uint16_t data16    [4] ; // Caution: subject to endianness
    int16_t  data_s16  [4] ; // Caution: subject to endianness
    int8_t   data_s8   [8] ;
    uint8_t  data      [8] = {0, 0, 0, 0, 0, 0, 0, 0} ;
  } ;
} ;
```

Note the message datas are defined by an **union**. So message datas can be seen as height bytes, four 16-bit unsigned integers, two 32-bit, one 64-bit or two 32-bit floats. Be aware that multi-byte integers and floats are subject to endianness (Cortex M4 processors of the STM32 are little-endian).

The `idx` property is not used in CAN frames, but:

- for a received message, it contains the acceptance filter index (see section 14 page 18);

- on sending messages, it is used for selecting the transmit buffer (see section 11 page 10).

7   Transmit FIFO

The STM32 bxCAN module provides 3 *mailboxes* for sending CAN frames. Each mailbox has a capacity of 1 message. `MailBox 0` gets the message from the *driver transmit FIFO*, for `MailBox 1` and `MailBox 2` see section 8 page 9.

The transmit FIFO (see figure 1 page 4) size is 20 by default; you can change the default size by setting the `mDriverTransmitFIFOSize` property of your `settings` object.

For sending a message throught the *Transmit FIFO*, call the `tryToSendReturnStatus` method with a message whose `idx` property is zero:

- if the *controller transmit FIFO* is not full, the message is appended to it, and `tryToSendReturnStatus` returns `0`;

- otherwise, if the *driver transmit FIFO* is not full, the message is appended to it, and `tryToSendReturnStatus` returns `0`; the interrupt service routine will transfer messages from *driver transmit FIFO* to the *hardware transmit FIFO* while it is not full;

- otherwise, both FIFOs are full, the message is not stored and `tryToSendReturnStatus` returns the `kTransmitBufferOverflow` error.

The transmit FIFO ensures sequentiality of emission.

7.1   The `driverTransmitFIFOSize` method

The `driverTransmitFIFOSize` method returns the allocated size of this driver transmit FIFO, that is the value of `settings.mDriverTransmitFIFOSize` when the `begin` method is called.

```
const uint32_t s = can.driverTransmitFIFOSize () ;
```

7.2   The `driverTransmitFIFOCount` method

The `driverTransmitFIFOCount` method returns the current number of messages in the driver transmit FIFO.

```
const uint32_t n = can.driverTransmitFIFOCount () ;
```

7.3   The `driverTransmitFIFOPeakCount` method

The `driverTransmitFIFOPeakCount` method returns the peak value of message count in the driver transmit FIFO.

```
const uint32_t max = can.driverTransmitFIFOPeakCount () ;
```

If the transmit FIFO is full when `tryToSendReturnStatus` is called, the return value of this call is `kTransmit‐BufferOverflow`. In such case, the following calls of `driverTransmitBufferPeakCount()` will return `driverTransmitFIFOSize()+1`.

So, when `driverTransmitFIFOPeakCount()` returns a value lower or equal to `transmitFIFOSize()`, it means that calls to `tryToSendReturnStatus` do not provide any overflow of the driver transmit FIFO.

8   Transmit mailboxes (`MailBox1` and `MailBox2`)

A *Mailbox* has a capacity of 1 message. So it is either empty, either full. You can call the `sendBufferNotFullForIndex` method (section 11.1 page 11) for testing if a mailbox is empty or full.

9   Transmit Priority

From document RM0394 Rev 4, section 44.7.1, pages 1482-1483:

By identifier. *When more than one transmit mailbox is pending, the transmission order is given by the identifier of the message stored in the mailbox. The message with the lowest identifier value has the highest priority according to the arbitration of the CAN protocol. If the identifier values are equal, the lower mailbox number will be scheduled first.*

By transmit request order. *In this mode the priority order is given by the transmit request order. This mode is very useful for segmented transmission.*

By default, the selected mode is *by identifier*.

You can change the default mode by setting the `settings.mTransmitPriority`:

```
settings.mTransmitPriority = ACAN_STM32_Settings::BY_REQUEST_ORDER ;
```

10 Receive FIFOs

A CAN module contains two receive FIFOs, `FIFO0` and `FIFO1`. **By default, only FIFO0 is enabled.**

the receive FIFOi ($0 \leqslant i \leqslant 1$, see figure 1 page 4) is composed by:

- the *hardware receive FIFOi*, whose size is always 3;

- the *driver receive FIFOi* (in library software), whose size is positive (default 32 for `FIFO0`, O for `FIFO1`); you can change the default size by setting the `mDriverReceiveFIFO`i`Size` property of your `settings` object.

The receive FIFO mechanism ensures sequentiality of reception.

11 Sending frames: the `tryToSendReturnStatus` method

The `ACAN_STM32::tryToSendReturnStatus` method sends CAN 2.0B frames:

```
uint32_t ACAN_STM32::tryToSendReturnStatus (const CANMessage & inMessage);
```

You call the `tryToSendReturnStatus` method for sending a message in the CAN network. Note this function returns before the message is actually sent; this function only adds the message to a transmit buffer. It returns:

- `kTransmitBufferIndexTooLarge` (value: 1) if the `idx` property value does not specify a valid transmit mailbox (see below);

- `kTransmitBufferOverflow` (value: 2) if the transmit buffer specified by the `idx` property value is full;

- `0` (no error) if the message has been successfully added to the transmit buffer specified by the `idx` property value.

The `idx` property of the message specifies the transmit buffer:

- 0 for the transmit FIFO (section 7 page 8);

- 1 for the *mailbox 1* (section 8 page 9);

- 2 for the *mailbox 2* (section 8 page 9).

11.1   Testing a send buffer: the `sendBufferNotFullForIndex` method

```
bool ACAN_STM32::sendBufferNotFullForIndex (const uint32_t inTxBufferIndex);
```

This method returns `true` if the corresponding transmit buffer is not full, and `false` otherwise (table 3).

inTxBufferIndex	Operation
0	`true` if the transmit FIFO is not full, and `false` otherwise
1	`true` if the Mailbox1 is empty, and `false` if it is full
2	`true` if the Mailbox2 is empty, and `false` if it is full
> 2	Always `false`

Table 3 – Value returned by the `sendBufferNotFullForIndex` method

11.2   Usage example

A way is to use a global variable to note if the message has been successfully transmitted to driver transmit buffer. For example, for sending a message every 2 seconds:

```
static uint32_t gSendDate = 0 ;

void loop () {
  if (gSendDate < millis ()) {
    CANMessage message ;
    // Initialize message properties
    const uint32_t sendStatus = can.tryToSendReturnStatus (message) ;
    if (sendStatus == 0) {
      gSendDate += 2000 ;
    }
  }
}
```

An other hint to use a global boolean variable as a flag that remains `true` while the message has not been sent.

```
static bool gSendMessage = false ;

void loop () {
  ...
  if (frame_should_be_sent) {
    gSendMessage = true ;
  }
  ...
  if (gSendMessage) {
    CANMessage message ;
    // Initialize message properties
    const uint32_t sendStatus = can.tryToSendReturnStatus (message) ;
    if (sendStatus == 0) {
```

```
      gSendMessage = false ;
    }
  }
  ...
}
```

12 Retrieving received messages using the $receive_i$ method

```
bool ACAN_STM32::receive0 (CANMessage & outMessage) ;
bool ACAN_STM32::receive1 (CANMessage & outMessage) ;
```

If the receive FIFO i is not empty, the oldest message is removed, assigned to outMessage, and the method returns true. If the receive FIFO i is empty, the method returns false.

This is a basic example:

```
void loop () {
  CANMessage message ;
  if (can.receive0 (message)) {
    // Handle received message
  }
  ...
}
```

The receive method:

- returns false if the driver receive buffer is empty, message argument is not modified;

- returns true if a message has been has been removed from the driver receive buffer, and the message argument is assigned.

You need to manually dispatch the received messages. If you did not provide any receive filter, you should check the type property (remote or data frame?), the ext bit (base or extended frame), and the id (identifier value). The following snippet dispatches three messages:

```
void loop () {
  CANMessage message ;
  if (can.receive0 (message)) {
    if (!message.rtr && message.ext && (message.id == 0x123456)) {
      handle_myMessage_0 (message) ; // Extended data frame, id is 0x123456
    }else if (!message.rtr && !message.ext && (message.id == 0x234)) {
      handle_myMessage_1 (message) ;  // Base data frame, id is 0x234
    }else if (message.rtr && !message.ext && (message.id == 0x542)) {
      handle_myMessage_2 (message) ;  // Base remote frame, id is 0x542
    }
  }
  ...
}
```

The `handle_myMessage_0` function has the following header:

```
void handle_myMessage_0 (const CANMessage & inMessage) {
  ...
}
```

So are the header of the `handle_myMessage_1` and the `handle_myMessage_2` functions.

12.1   Driver receive FIFO i size

By default, the driver receive FIFO 0 size is 10 and the driver receive FIFO 1 size is 0. You can change them by setting the `mDriverReceiveFIFO0Size` property and the `mDriverReceiveFIFO01Size` property of `settings` variable before calling the `begin` method:

```
ACAN_STM32_Settings settings (125 * 1000) ;
settings.mDriverReceiveFIFO0Size = 100 ;
const uint32_t errorCode = can.begin (settings) ;
...
```

As the size of `CANMessage` class is 16 bytes, the actual size of the driver receive FIFO 0 is the value of `settings.mDriverReceiveFIFO0Size` $*$ 16, and the actual size of the driver receive FIFO 1 is the value of `settings.mDriverReceiveFIFO01Size` $*$ 16.

12.2   The `driverReceiveFIFO`i`Size` method

The `driverReceiveFIFO`i`Size` method returns the size of the driver FIFO i, that is the value of the `mDriver-ReceiveFIFO`i`Size` property of `settings` variable when the the `begin` method is called.

```
const uint32_t s = can.driverReceiveFIFO0Size () ;
```

12.3   The `driverReceiveFIFO`i`Count` method

The `driverReceiveFIFO`i`Count` method returns the current number of messages in the driver receive FIFO i.

```
const uint32_t n = can.driverReceiveFIFO0Count () ;
```

12.4   The `driverReceiveFIFO`i`PeakCount` method

The `driverReceiveFIFO`i`PeakCount` method returns the peak value of message count in the driver receive FIFO i.

```
const uint32_t max = can.driverReceiveFIFO0PeakCount () ;
```

If an overflow occurs, further calls of `can.driverReceiveFIFO`i`PeakCount ()` return `can.driverReceiveFIFO`i`Size ()`+1.

12.5   **The resetDriverReceiveFIFO*i*PeakCount method**

The resetDriverReceiveFIFO*i*PeakCount method assign the current count to the peak value.

```
can.resetDriverReceiveFIFO0PeakCount () ;
```

13   Acceptance filters

for an example sketch, see LoopBackDemoFilters.

The bxCAN module accepts up to 14 filter banks. A filter bank can be either:

- a standard quad filter bank (section 13.1 page 14);

- a standard mask dual filter bank (section 13.2 page 15);

- an extended dual filter bank (section 13.3 page 16);

- an extended mask single filter bank (section 13.4 page 17).

The bxCAN module bases the filtering of the received frames on the nature of their identifier value, format (standard / extended, data / remote).

13.1   **Quad standard filter bank**

```
bool Filters::addStandardQuad (const uint16_t inIdentifier1,
                               const bool inRTR1,
                               const uint16_t inIdentifier2,
                               const bool inRTR2,
                               const uint16_t inIdentifier3,
                               const bool inRTR3,
                               const uint16_t inIdentifier4,
                               const bool inRTR4,
                               const ACAN_STM32::Action inAction) ;

bool Filters::addStandardQuad (const uint16_t inIdentifier1,
                               const bool inRTR1,
                               const ACANCallBackRoutine inCallBack1,
                               const uint16_t inIdentifier2,
                               const bool inRTR2,
                               const ACANCallBackRoutine inCallBack2,
                               const uint16_t inIdentifier3,
                               const bool inRTR3,
                               const ACANCallBackRoutine inCallBack3,
                               const uint16_t inIdentifier4,
                               const bool inRTR4,
```

```
                              const ACANCallBackRoutine inCallBack4,
                              const ACAN_STM32::Action inAction) ;
```

This bank defines 4 individual independant filters; one of theses filters matches if all following conditions are met:

- the received frame is a standard frame;

- the received frame identifier is equal to $inIdentifier_i$ value;

- if $inRTR_i$ is `false`, the received frame is a data frame;

- if $inRTR_i$ is `true`, the received frame is a remote frame.

If the received frame matches one of theses filters, it is appended to Hardware receive FIFO0 or Hardware receive FIFO1, depending from `inAction` value.

Therefore this bank is valid if all $inIdentifier_i$ are lower or equal to `0x7FF`, and the current filter bank count is lower than 14. The method returns `true` if the bank is valid, and `false` otherwise. If the bank is valid, this method appends it to the receiver list. If the bank is not valid, the bank is not appended.

A $inCallBack_i$ callback function can be associated to each individual filter. The first prototype does not name any callback function, it is equivalent to the second one when all $inCallBack_i$ are `nullptr`.

See for using callback routines.

13.2　Dual standard mask filter bank

```
bool Filters::addStandardMasks (const uint16_t inBase1,
                                const uint16_t inMask1,
                                const Format inFormat1,
                                const uint16_t inIdentifier2,
                                const uint16_t inMask2,
                                const Format inFormat2,
                                const ACAN_STM32::Action inAction) ;

bool Filters::addStandardMasks (const uint16_t inBase1,
                                const uint16_t inMask1,
                                const Format inFormat1,
                                const ACANCallBackRoutine inCallBack1,
                                const uint16_t inIdentifier2,
                                const uint16_t inMask2,
                                const Format inFormat2,
                                const ACANCallBackRoutine inCallBack2,
                                const ACAN_STM32::Action inAction) ;
```

This bank defines 2 individual independant filters; one of theses filters matches if all following conditions are met:

- the received frame is a standard frame;

- the received frame identifier verifies (*received_frame_identifier* & inMask$i$) is equal to inBase$i$;

- if inFormat$i$ is equal to ACAN_STM32::DATA, the received frame is a data frame;

- if inFormat$i$ is equal to ACAN_STM32::REMOTE, the received frame is a remote frame;

- if inFormat$i$ is equal to ACAN_STM32::DATA_OR_REMOTE, the received frame can be a data frame or a remote frame.

If the received frame matches one of theses filters, it is appended to Hardware receive FIFO0 or Hardware receive FIFO1, depending from inAction value.

This bank is valid if the current filter bank count is lower than 14 and for all i:

- (inBase$i$ is lower or equal to 0x7FF;

- (inMask$i$ is lower or equal to 0x7FF;

- (inBase$i$ & inMask$i$) is equal to inBase$i$.

The method returns true if the bank is valid, and false otherwise. If the bank is valid, this method appends it to the receiver list. If the bank is not valid, the bank is not appended.

A inCallBack$i$ callback function can be associated to each individual filter. The first prototype does not name any callback function, it is equivalent to the second one when all inCallBack$i$ are nullptr.

See for using callback routines.

For example:

```
filters.addStandardMasks (0x405, 0x7D5, ACAN_STM32::DATA, // 8 Standard data frames
                          0x605, 0x7D5, ACAN_STM32::REMOTE, // 8 Standard remote frames
                          ACAN_STM32::FIFO1) ;
```

This first filter is valid because (0x405 & 0x7D5) is equal to 0x405.

	10	9	8	7	6	5	4	3	2	1	0
inBase: 0x405	1	0	0	0	0	0	0	0	1	0	1
inMask: 0x7D5	1	1	1	1	1	0	1	0	1	0	1
Matching identifiers	1	0	0	0	0	x	0	x	1	x	1

Therefore there are 8 matching identifiers: 0x405, 0x407, 0x40B, 0x40F, 0x425, 0x427, 0x42B, 0x42F.

13.3   Dual extended filter bank

```
bool Filters::addExtendedDual (const uint32_t inIdentifier1,
                               const bool inRTR1,
                               const uint32_t inIdentifier2,
                               const bool inRTR2,
                               const ACAN_STM32::Action inAction) ;
```

```
bool Filters::addExtendedDual (const uint32_t inIdentifier1,
                               const bool inRTR1,
                               const ACANCallBackRoutine inCallBack1,
                               const uint32_t inIdentifier2,
                               const bool inRTR2,
                               const ACANCallBackRoutine inCallBack2,
                               const ACAN_STM32::Action inAction) ;
```

This bank defines 2 individual independant filters; one of theses filters matches if all following conditions are met:

- the received frame is a extended frame;

- the received frame identifier is equal to $inIdentifier_i$ value;

- if $inRTR_i$ is `false`, the received frame is a data frame;

- if $inRTR_i$ is `true`, the received frame is a remote frame.

If the received frame matches one of theses filters, it is appended to Hardware receive FIFO0 or Hardware receive FIFO1, depending from `inAction` value.

Therefore this bank is valid if all $inIdentifier_i$ are lower or equal to `0x1FFF_FFFF`, and the current filter bank count is lower than 14. The method returns `true` if the bank is valid, and `false` otherwise. If the bank is valid, this method appends it to the receiver list. If the bank is not valid, the bank is not appended.

A $inCallBack_i$ callback function can be associated to each individual filter. The first prototype does not name any callback function, it is equivalent to the second one when all $inCallBack_i$ are `nullptr`.

See for using callback routines.

13.4   Single extended mask filter bank

```
bool Filters::addExtendedMask (const uint32_t inBase,
                               const uint32_t inMask,
                               const Format inFormat,
                               const ACAN_STM32::Action inAction) ;


bool Filters::addExtendedMask (const uint32_t inBase,
                               const uint32_t inMask,
                               const Format inFormat,
                               const ACANCallBackRoutine inCallBack,
                               const ACAN_STM32::Action inAction) ;
```

This bank defines one individual filter that matches if all following conditions are met:

- the received frame is an extended frame;

- the received frame identifier verifies (*received_frame_identifier* & `inMask`) is equal to `inBase`;

- if `inFormat` is equal to `ACAN_STM32::DATA`, the received frame is a data frame;

- if `inFormat` is equal to `ACAN_STM32::REMOTE`, the received frame is a remote frame;

- if `inFormat` is equal to `ACAN_STM32::DATA_OR_REMOTE`, the received frame can be a data frame or a remote frame.

If the received frame matches this filter, it is appended to Hardware receive FIFO0 or Hardware receive FIFO1, depending from `inAction` value.

This bank is valid if :

- the current filter bank count is lower than 14;

- (`inBase` is lower or equal to `0x1FFF_FFFF`;

- (`inMask` is lower or equal to `0x1FFF_FFFF`;

- (`inBase` & `inMask`*i*) is equal to `inBase`.

The method returns `true` if the bank is valid, and `false` otherwise. If the bank is valid, this method appends it to the receiver list. If the bank is not valid, the bank is not appended.

A `inCallBack` callback function can be associated to the filter. The first prototype does not name any callback function, it is equivalent to the second one when `inCallBack` is `nullptr`.

See for using callback routines.

For example:

```
filters.addExtendedMask (0x6789, 0x1FFF67BD, ACAN_STM32::REMOTE, ACAN_STM32::FIFO0) ;
```

This filter is valid because (`0x6789` & `0x1FFF67BD`) is equal to `0x6789`.

	28 … 16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
inBase: 0x6789	0	0	1	1	0	0	1	1	1	1	0	0	0	1	0	0	1
inMask: 0x1FFF67BD	1	0	1	1	0	0	1	1	1	1	0	1	1	1	1	0	1
Matching identifiers	0	x	1	1	x	x	1	1	1	1	x	1	1	1	0	x	1

Therefore there are 32 matching extended remote frames.

14 The `dispatchReceivedMessage` method

Sample sketch: the `LoopBackDemoDispatch` sketch shows how using the `dispatchReceivedMessage` method.

Instead of calling the `receive0` and the `receive1` methods, call the `dispatchReceivedMessage` method in your `loop` function. For every message extracted from `FIFO0` and `FIFO1`, it calls the callback function associated with the corresponding filter.

If you have not defined any filter, do not use this function, call the `receive0` and / or the `receive1` methods.

```
void loop () {
  can.dispatchReceivedMessage () ; // Do not call can.receive0, can.receive1 any more
  ...
}
```

The `dispatchReceivedMessage` method handles one `FIFO0` message and one `FIFO1` message on each call. Specifically:

- if `FIFO0` and `FIFO01` are both empty, it returns `false`;

- if `FIFO0` is not empty, its oldest message is extracted and its associated callback is called; then, if `FIFO1` is not empty, its oldest message is extracted and its associated callback is called; the `true` value is returned.

If a filter definition does not name a callback function, the corresponding messages are lost.

The return value can used for emptying the FIFOs and dispatching all received messages:

```
void loop () {
  while (can.dispatchReceivedMessage ()) {
  }
  ...
}
```

15   The `dispatchReceivedMessage0` method

The `dispatchReceivedMessage0` method dispatches the messages stored in the `FIFO0`. The messages stored is `FIFO1` are retrieved using the `receive1` method.

```
void loop () {
  can.dispatchReceivedMessage0 () ; // Do not call can.receive0 any more
  CANMessage ;
  if (can.receive1 (message)) {
    ... handle FIFO1 message ...
  }
  ...
}
```

Instead of calling the `receive0` method, call the `dispatchReceivedMessage0` method in your `loop` function. For every message extracted from `FIFO0`, it calls the callback function associated with the corresponding filter.

If you have not defined any filter that targets the `FIFO0`, do not use this function (messages will be not dispatched and therefore lost), call the `receive0` method.

The `dispatchReceivedMessage0` method handles one `FIFO0` message on each call. Specifically:

- if `FIFO0` is empty, it returns `false`;

- if FIFO0 is not empty, its oldest message is extracted and its associated callback is called and the `true` value is returned.

If a filter definition does not name a callback function, the corresponding messages are lost.

The return value can used for emptying and dispatching all received messages:

```
void loop () {
  while (can.dispatchReceivedMessage0 ()) {
  }
  CANMessage ;
  if (can.receive1 (message)) {
    ... handle FIFO1 message ...
  }
  ...
}
```

16 The `dispatchReceivedMessage1` method

The `dispatchReceivedMessage1` method dispatches the messages stored in the `FIFO1`. The messages stored is `FIFO0` are retrieved using the `receive0` method.

```
void loop () {
  can.dispatchReceivedMessage1 () ; // Do not call can.receive1 any more
  CANMessage ;
  if (can.receive0 (message)) {
    ... handle FIFO0 message ...
  }
  ...
}
```

Instead of calling the `receive1` method, call the `dispatchReceivedMessage1` method in your `loop` function. For every message extracted from `FIFO1`, it calls the callback function associated with the corresponding filter.

If you have not defined any filter that targets the `FIFO1`, do not use this function (messages will be not dispatched and therefore lost), call the `receive1` method.

The `dispatchReceivedMessage1` method handles one `FIFO1` message on each call. Specifically:

- if FIFO1 is empty, it returns `false`;

- if FIFO1 is not empty, its oldest message is extracted and its associated callback is called and the `true` value is returned.

If a filter definition does not name a callback function, the corresponding messages are lost.

The return value can used for emptying and dispatching all received messages:

```
void loop () {
  while (can.dispatchReceivedMessage1 ()) {
  }
  CANMessage ;
  if (can.receive0 (message)) {
    ... handle FIFO0 message ...
  }
  ...
}
```

17 The `ACAN_STM32::begin` method reference

17.1 The prototype

```
uint32_t ACAN_STM32::begin (const ACAN_STM32_Settings & inSettings,
                            const ACAN_STM32::Filters & inFilters = ACAN_STM32::Filters ()) ;
```

The first argument is a `ACAN_STM32_Settings` instance that defines the settings.

The second one is optional, and specifies the filter bank list (see). By default, the filter bank list is empty.

17.2 The error codes

The `ACAN_STM32::begin` method returns an error code. The value `0` denotes no error. Otherwise, you consider every bit as an error flag, as described in table 4. An error code could report several errors. The ACAN_STM32 class defines static constants for naming errors.

Bit	Code	Static constant Name	Comment
0	0x1	kBitRatePrescalerIsZero	See table 5 page 25
…	…	….	See table 5 page 25
9	0x200	kDataSJWIsGreaterThanPhaseSegment2	See table 5 page 25
16	0x1_0000	kActualBitRateTooFarFromDesiredBitRate	

Table 4 – The `ACAN_STM32::begin` method error code bits

18 `ACAN_STM32_Settings` class reference

Note. The `ACAN_STM32_Settings` class is not Arduino specific. You can compile it on your desktop computer with your favorite C++ compiler.

18.1 The `ACAN_STM32_Settings` constructor: computation of the CAN bit settings

```
void setup () {
ACAN_STM32_Settings::ACAN_STM32_Settings (const uint32_t inDesiredBitRate,
                                          const uint32_t inTolerancePPM = 1000) ;
```

The constructor of the `ACAN_STM32_Settings` has two mandatory arguments: the desired bit rate. It tries to compute the CAN bit settings for theses bit rates. If it succeeds, the constructed object has its `mBitRateClo-sedToDesiredRate` property set to `true`, otherwise it is set to `false`. For example, for an 1 Mbit/s bit rate:

```
void setup () {
 // Bit rate: 1 Mbit/s
  ACAN_STM32_Settings settings (1000 * 1000) ;
  // Here, settings.mBitRateClosedToDesiredRate is true
  ...
}
```

But this does not mean there is no possibility to get such data bit rates factors. For example, we can have a bit rate of 4/7 Mbit/s = 571 428 kbit/s with the STM32L432KC clock (80 MHz):

```
void setup () {
  ...
  ACAN_STM32_Settings settings (571428) ;
  Serial.print ("mBitRateClosedToDesiredRate:␣") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (true)
  Serial.print ("Actual␣Bit␣Rate:␣") ;
  Serial.println (settings.actualBitRate ()) ; //  571428 bit/s
  Serial.print ("distance:␣") ;
  Serial.println (settings.ppmFromDesiredBitRate ()) ; // 1 ppm= 0,0001 %
  ...
}
```

Due to integer computations, and the distance from desired bit rate is 1 ppm. "ppm" stands for "part-per-million", and $1\,\text{ppm} = 10^{-6}$. In other words, $10,000\,\text{ppm} = 1\%$.

By default, a desired bit rate is accepted if the distance from the computed actual bit rate is lower or equal to $1,000\,\text{ppm} = 0.1\,\%$. You can change this default value by adding your own value as third argument of `ACAN_STM32_Settings` constructor. For example, with a bit rate equal to 727 kbit/s (with the STM32L432KC clock, 80 MHz):

```
void setup () {
  ...
  ACAN_STM32_Settings settings (727 * 1000, 100) ; // 100 ppm
  Serial.print ("mBitRateClosedToDesiredRate:␣") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (false)
  Serial.print ("actual␣bit␣rate:␣") ;
  Serial.println (settings.actualBitRate ()) ; // 727272 bit/s
  Serial.print ("distance:␣") ;
  Serial.println (settings.ppmFromDesiredBitRate ()) ; // 375 ppm
  ...
}
```

The third argument does not change the CAN bit computation, it only changes the acceptance test for setting the `mBitRateClosedToDesiredRate` property. For example, you can specify that you want the computed actual bit to be exactly the desired bit rate:

```
void setup () {
  ...
  ACAN_STM32_Settings settings (500 * 1000, 0) ; // Max distance is 0 ppm
  Serial.print ("mBitRateClosedToDesiredRate: ") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (true)
  Serial.print ("distance: ") ;
  Serial.println (settings.ppmFromDesiredBitRate ()) ; // 0 ppm
  ...
}
```

In any way, the bit rate computation always gives a consistent result, resulting an actual bit rate closest from the desired bit rate. For example, we query a 330 kbit/s bit rate (with the STM32L432KC clock, 80 MHz):

```
void setup () {
  ...
  ACAN_STM32_Settings settings (330 * 1000) ;
  Serial.print ("mBitRateClosedToDesiredRate: ") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (false)
  Serial.print ("Actual Bit Rate: ") ;
  Serial.println (settings.actualBitRate ()) ; //  330 578 bit/s
  Serial.print ("distance: ") ;
  Serial.println (settings.ppmFromDesiredBitRate ()) ; // 1 753 ppm
  ...
}
```

The resulting bit rates settings are far from the desired values, the CAN bit decomposition is consistent. You can get its details:

```
void setup () {
  ...
  ACAN_STM32_Settings settings (330 * 1000) ;
  Serial.print ("mBitRateClosedToDesiredRate: ") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (false)
  Serial.print ("Actual Bit Rate: ") ;
  Serial.println (settings.actualBitRate ()) ; //  330 578 bit/s
  Serial.print ("distance: ") ;
  Serial.println (settings.ppmFromDesiredBitRate ()) ; // 1 753 ppm
  Serial.print ("Bit rate prescaler: ") ;
  Serial.println (settings.mBitRatePrescaler) ; // BRP = 11
  Serial.print ("Phase segment 1: ") ;
  Serial.println (settings.mPhaseSegment1) ; // PS1 = 14
  Serial.print ("Phase segment 2: ") ;
  Serial.println (settings.mPhaseSegment2) ; // PS2 = 7
  Serial.print ("Resynchronization Jump Width: ") ;
  Serial.println (settings.mRJW) ; // RJW = 4
```

```
    Serial.print ("Sample␣Point:␣") ;
    Serial.println (settings.samplePointFromBitStart ()) ; // 68, meaning 68%
    Serial.print ("Consistency:␣") ;
    Serial.println (settings.CANBitSettingConsistency ()) ; // 0, meaning Ok
    ...
}
```

The `samplePointFromBitStart` method returns sample point, expressed in per-cent of the bit duration from the beginning of the bit.

Note the computation may calculate a bit decomposition too far from the desired bit rate, but it is always consistent. You can check this by calling the `CANBitSettingConsistency` method.

You can change the property values for adapting to the particularities of your CAN network propagation time. By example, you can increment the `mPhaseSegment1` property value, and decrement the `mPhaseSegment2` property value in order to sample the RxCAN pin later.

```
void setup () {
  ...
  ACAN_STM32_Settings settings (500 * 1000) ;
  Serial.print ("mBitRateClosedToDesiredRate:␣") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (true)
  settings.mPhaseSegment1 += 1 ; // 13 -> 14: safe, 1 <= PS1 <= 16
  settings.mPhaseSegment2 -= 1 ; // 6 -> 5: safe, 1 <= PS2 <= 8, and PS2 >= RJW
  Serial.print ("Sample␣Point:␣") ;
  Serial.println (settings.samplePointFromBitStart ()) ; // 75, meaning 75%
  Serial.print ("actual␣bit␣rate:␣") ;
  Serial.println (settings.actualBitRate ()) ; // 500 000: ok, no change
  Serial.print ("Consistency:␣") ;
  Serial.println (settings.CANBitSettingConsistency ()) ; // 0, meaning Ok
  ...
}
```

Be aware to always respect CAN bit timing consistency! The `bxCAN` constraints are:

$$1 \leqslant \text{mBitRatePrescaler} \leqslant 1024$$

$$1 \leqslant \text{mPhaseSegment1} \leqslant 16$$

$$2 \leqslant \text{mPhaseSegment2} \leqslant 18$$

$$1 \leqslant \text{mRJW} \leqslant 4$$

$$\text{mRJW} \leqslant \text{mPhaseSegment2}$$

Resulting actual bit rates are given by (CAN_CLOCK_FREQUENCY is defined in):

$$\text{Actual Bit Rate} = \frac{\texttt{CAN\_CLOCK\_FREQUENCY}}{\texttt{mBitRatePrescaler} \cdot (1 + \texttt{mPhaseSegment1} + \texttt{mPhaseSegment2})}$$

And the sampling point (in per-cent unit) are given by:

$$\text{Sampling Point} = 100 \cdot \frac{1 + \texttt{mPhaseSegment1}}{1 + \texttt{mPhaseSegment1} + \texttt{mPhaseSegment2}}$$

18.2   The `CANBitSettingConsistency` method

This method checks the CAN bit decomposition (specified by `mBitRatePrescaler`, `mPhaseSegment1`, `mPhaseSegment2`, `mRJW` and `mTripleSampling` property values) is consistent.

```
void setup () {
  ...
  ACAN_STM32_Settings settings (500 * 1000) ;
  Serial.print ("mBitRateClosedToDesiredRate:␣") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 1 (true)
  settings.mPhaseSegment1 = 0 ; // Error, mPhaseSegment1 should be >= 1 (and <= 16)
  Serial.print ("Consistency:␣0x") ;
  Serial.println (settings.CANBitSettingConsistency (), HEX) ; // != 0, meaning error
  ...
}
```

The `CANBitSettingConsistency` method returns 0 if CAN bit decomposition is consistent. Otherwise, the returned value is a bit field that can report several errors – see table 5.

The `ACAN_STM32_Settings` class defines static constant properties that can be used as mask error. For example:

```
public: static const uint32_t kBitRatePrescalerIsZero = 1 << 0 ;
```

Bit	Code	Error Name	Error
0	0x1	kBitRatePrescalerIsZero	mBitRatePrescaler == 0
1	0x2	kBitRatePrescalerIsGreaterThan1024	mBitRatePrescaler > 1024
2	0x4	kPhaseSegment1IsZero	mPhaseSegment1 == 0
3	0x8	kPhaseSegment1IsGreaterThan16	mPhaseSegment1 > 16
4	0x10	kPhaseSegment2IsZero	mPhaseSegment2 == 0
5	0x20	kPhaseSegment2IsGreaterThan8	mPhaseSegment2 > 8
6	0x40	kRJWIsZero	mRJW == 0
7	0x80	kRJWIsGreaterThan4	mRJW > 4
8	0x100	kRJWIsGreaterThanPhaseSegment2	mRJW > mPhaseSegment2
9	0x200	kPhaseSegment1Is1AndTripleSampling	(mPhaseSegment1 == 1) and triple sampling

Table 5 – The `ACAN_STM32_Settings::CANBitSettingConsistency` method error codes

18.3   The `actualBitRate` method

The actualBitRate method returns the actual bit computed from mBitRatePrescaler, mPropagationSegment, mPhaseSegment1, mPhaseSegment2, mRJW property values.

```
void setup () {
  ...
  ACAN_STM32_Settings settings (440 * 1000) ;
  Serial.print ("mBitRateClosedToDesiredRate: ") ;
  Serial.println (settings.mBitRateClosedToDesiredRate) ; // 0 (false)
  Serial.print ("actual bit rate: ") ;
  Serial.println (settings.actualBitRate ()) ; //  444,444 bit/s
  ...
}
```

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.4   The `exactBitRate` method

```
bool ACAN_STM32_Settings::exactBitRate (void) const ;
```

The exactBitRate method returns true if the actual bit rate is equal to the desired bit rate, and false otherwise.

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.5   The `exactDataBitRate` method

```
bool ACAN_STM32_Settings::exactDataBitRate (void) const ;
```

The exactDataBitRate method returns true if the actual data bit rate is equal to the desired data bit rate, and false otherwise.

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.6   The `ppmFromDesiredBitRate` method

```
uint32_t ACAN_STM32_Settings::ppmFromDesiredBitRate (void) const ;
```

The ppmFromDesiredBitRate method returns the distance from the actual bit rate to the desired bit rate, expressed in part-per-million (ppm): $1\,\mathrm{ppm} = 10^{-6}$. In other words, $10,000\,\mathrm{ppm} = 1\%$.

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.7   The `ppmFromDesiredDataBitRate` method

```
uint32_t ACAN_STM32_Settings::ppmFromDesiredDataBitRate (void) const ;
```

The ppmFromDesiredDataBitRate method returns the distance from the actual data bit rate to the desired data bit rate, expressed in part-per-million (ppm): $1 \text{ ppm} = 10^{-6}$. In other words, $10,000 \text{ ppm} = 1\%$.

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.8 The **samplePointFromBitStart** method

```
uint32_t ACAN_STM32_Settings::samplePointFromBitStart (void) const ;
```

The samplePointFromBitStart method returns the distance of sample point from the start of the CAN bit, expressed in part-per-cent (ppc): $1 \text{ ppc} = 1\% = 10^{-2}$. It is a good practice to get sample point from 65% to 80%. The bit rate calculator tries to set the sample point at 80%.

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.9 The **dataSamplePointFromBitStart** method

```
uint32_t ACAN_STM32_Settings::dataSamplePointFromBitStart (void) const ;
```

The dataSamplePointFromBitStart method returns the distance of sample point from the start of the data CAN bit, expressed in part-per-cent (ppc): $1 \text{ ppc} = 1\% = 10^{-2}$. It is a good practice to get sample point from 65% to 80%. The bit rate calculator tries to set the sample point at 80%.

Note. If CAN bit settings are not consistent (see section 18.2 page 25), the returned value is irrelevant.

18.10 Properties of the **ACAN_STM32_Settings** class

All properties of the ACAN_STM32_Settings class are declared public and are initialized (table 6).

Property	Type	Initial value	Comment
mDesiredBitRate	uint32_t	Constructor argument	
mBitRatePrescaler	uint8_t	1024	See section 18.1 page 21
mPhaseSegment1	uint16_t	16	See section 18.1 page 21
mPhaseSegment2	uint8_t	8	See section 18.1 page 21
mRJW	uint8_t	4	See section 18.1 page 21
mTripleSampling	bool	true	See section 18.1 page 21
mBitRateClosedToDesiredRate	bool	false	See section 18.1 page 21
mModuleMode	ModuleMode	NORMAL	See section 18.10.1 page 28
mOpenCollectorOutput	bool	false	See section 18.10.2 page 28
mTransmitPriority	TransmitPriority	BY_REQUEST_ORDER	See section 9 page 9
mDriverReceiveFIFO0Size	uint16_t	32	See section 12.1 page 13
mDriverReceiveFIFO1Size	uint16_t	0	See section 12.1 page 13
mDriverTransmitFIFOSize	uint16_t	8	See section 7 page 8

Table 6 – Properties of the ACAN_STM32_Settings class

18.10.1   The `mModuleMode` property

This property defines the mode requested at this end of the configuration process: NORMAL (default value), INTERNAL_LOOP_BACK, EXTERNAL_LOOP_BACK.

18.10.2   The `mOpenCollectorOutput` property

By default, mOpenCollectorOutput property is `false`, therefore TxCAN pin is 2-state push / pull pin. If mOpenCollectorOutput property is set to `true`, TxCAN pin is an open collector pin.