


# **SERIES 200 A SWITCHES**

### TOGGLE SWITCHES - PROCESS SEALED SUB-MINIATURE



#### **FEATURES & BENEFITS**

- ► Variety of switching functions
- ► Sub-miniature
- ► Multiple actuator & bushing options
- ► Sealed to IP67

#### **APPLICATIONS/MARKETS**

- ► Telecommunications
- ► Instrumentation
- ► Networking
- ► Medical equipment

SPECIFICATIONS	
Contact Rating:	Dependent on contact material
Life Expectancy:	50,000 make-and-break cycles at full load
Contact Resistance:	Below 20 m typ. initial @ 2-4 VDC, 100 mA, for both silver and gold plated contacts
Insulation Resistance:	1,000 MΩ min.
Dielectric Strength:	1,000 V RMS min. @ sea level
Operating Temperature:	-30° C to 85° C
Seal Rated:	IP67

MATERIALS	
Case & Bushing:	Glass filled nylon, flame retardant, heat stabilized (UL 94-V0)
Actuator:	Brass, chrome plated, internal O-ring seal standard for all actuators
Switch Support:	Brass, tin plated
Contacts / Terminals:	Silver or gold plated copper alloy
Terminal Seal:	Ероху

#### **HOW TO ORDER** CONTACT MATERIAL SERIES MODEL NO. ACTUATOR BUSHING TERMINATION SEAL 200A Е WMSP1 Α1 M2 Q = SilverE = Epoxy T2 WMSP2 M6 R = Gold Sealed at WMSP3 T3 M61 Base of M7 WMSP4 Terminal WMSP5 VS2 WMSP6\* WMDP1 WMDP2 WMDP3 **Example Ordering Number** \*Only available with M2 or VS2 200A-WMSP2-T1-A1-VS2-Q-E termination

Specifications subject to change without notice.4.21.2022

### **SPDT**


















Model No.	POS 1	POS 2	POS 3
WMSP-1	ON	NONE	ON
WMSP-2	ON	NONE	(ON)
WMSP-3	ON	OFF	ON
WMSP-4	(ON)	OFF	(ON)
WMSP-5	ON	OFF	(ON)
Term. Comm.	2 - 3	OPEN	2 - 1
WMSP-6	OFF	NONE	ON
Term. Comm.	OPEN	NONE	3-1

( ) = Momentary




132

**DPDT** 

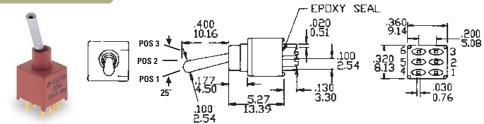



	POS 1	POS 2	POS 3
Model No.	7	1	<b>∠</b>
WMDP-1	ON	NONE	ON
WMDP-2	ON	NONE	(ON)
WMDP-3	ON	OFF	ON
Term. Comm.	2-3,5-6	OPEN	2-1,5-4


( ) = Momentary




#### **ACTUATOR OPTIONS**









#### **BUSHING OPTIONS**



#### **TERMINATION OPTIONS**







TACT


NAVIGATION SWITCHES


PUSHBUTTON SWITCHES


TOGGLE SWITCHES


## **SERIES 200 A SWITCHES**

### TOGGLE SWITCHES - PROCESS SEALED SUB-MINIATURE

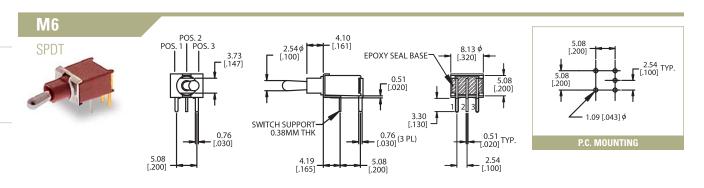

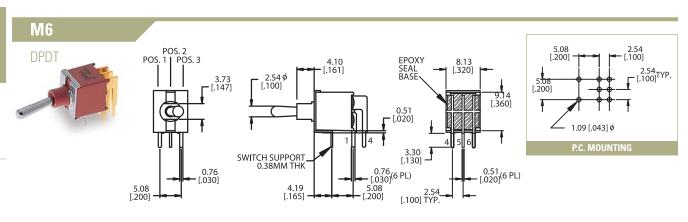

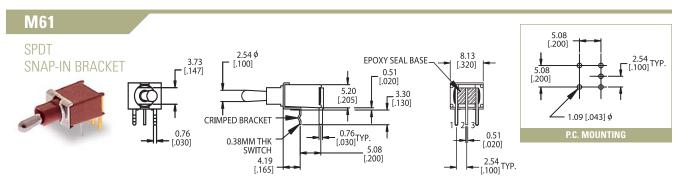

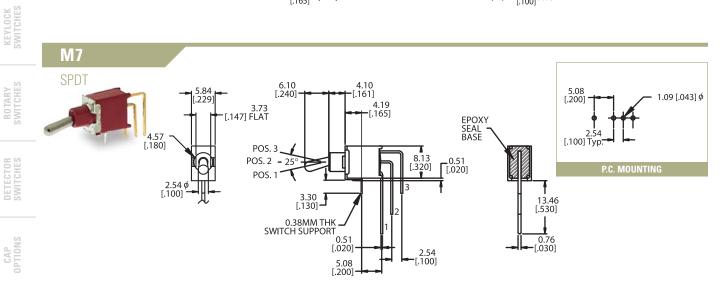


134


Phone: 800-867-2717 Fax: 763-531-8235





NAVIGATION SWITCHES


PUSHBUTTON SWITCHES

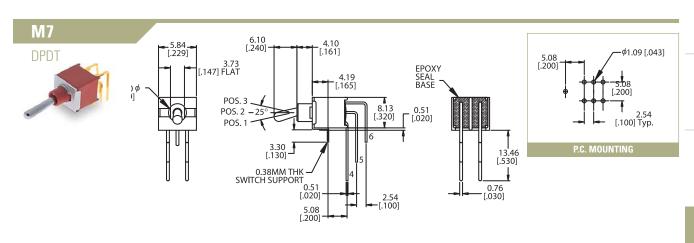

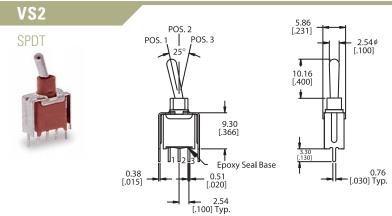



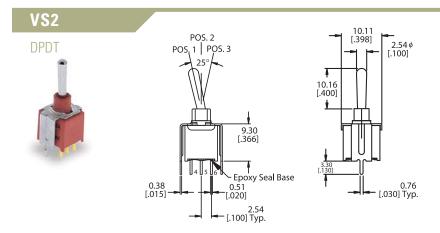



#### **CONTACT MATERIAL OPTIONS**

0

Fixed Terminal:	Silver plated copper alloy
Moving Contact:	Silver plated copper alloy
Rating:	3 Amps @ 120VAC or 28VDC; 1 Amp @ 250VAC

R

Fixed Terminal:	Copper alloy with gold plate over nickel plate
Moving Contact:	Copper alloy with gold plate over nickel plate
Rating:	0.4 Volt-Amps (VA) max. @ 20V max. (AC or DC)