



STELLMORE
Italia




BRIO-D

STM-SP

Overview

High-quality recessed fixture with die-cast aluminum body, efficient LED module, and anti-glare design. Available in various wattages, beam angles, and color temperatures for versatile applications.

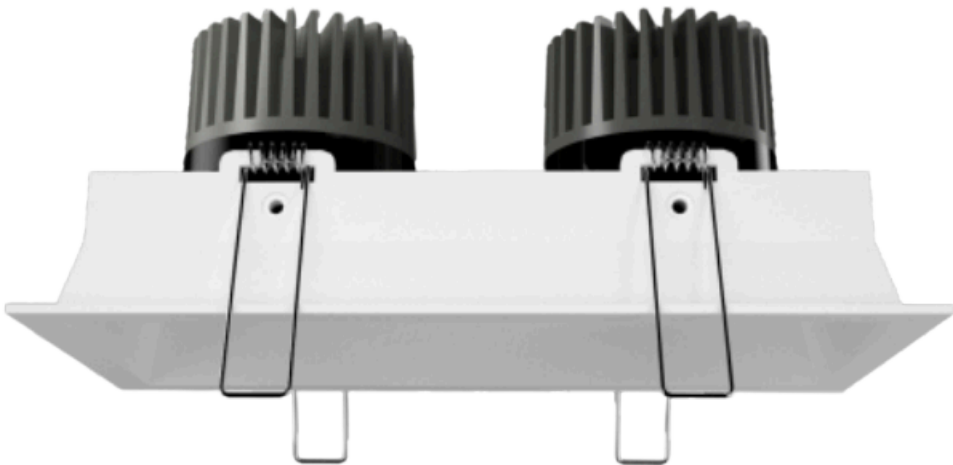


Family Range


Code	Power	Dimension
SLM-C1022	2*10W	200*110*H95mm

Parameters

Efficiancy	90lm/W
CRI	90
Adjustable	Yes
Power Factor	0.5
Input Voltage	AC220-240V 50/60Hz
Operating Temperature	-20° to 60°
Working Hours	50,000 Hrs.
IP RATING	IP44

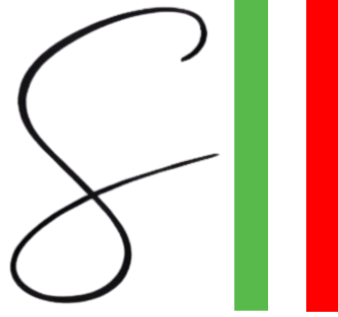

Specification

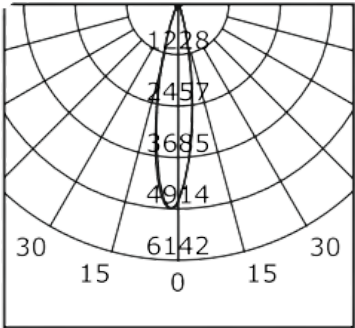LED CHIP	BRIDGELUX
FINISH	WH, BK, BRIGHT SILVER
MATERIAL DESCRIPTION	HOUSING: DIE CAST ALUMINIUM REFLECTOR: MIRROR FINISHED ALUMINIUM DIFFUSER: PMMA OPAL PC LENS
BEAM ANGLE	15°,24°,36°
DIMMING OPTION	  
PHOTOMETRIC	

Application

Modern Workspaces, Institutions, Small Format Retail Outlets
Hotels, High End Villas

Drawing

Unit: MM

