



CHIARA

STM-JG

Overview

High-quality recessed fixture with die-cast aluminum body, efficient LED module, and anti-glare design. Available in various wattages, beam angles, and color temperatures for versatile applications.




Family Range


| Code       | Power | Dimension   |
|------------|-------|-------------|
| SLM-1010JG | 10W   | Φ86*H55mm   |
| SLM-1020JG | 20W   | Φ101*H61mm  |
| SLM-1030JG | 30W   | Φ140*H73mm  |
| SLM-1040JG | 40W   | Φ180*H94mm  |
| SLM-1050JG | 50W   | Φ212*H110mm |

Parameters

|                       |                    |
|-----------------------|--------------------|
| Efficiency            | 110lm/W            |
| CRI                   | 95                 |
| Adjustable            | No                 |
| Power Factor          | 0.9                |
| Input Voltage         | AC220-240V 50/60Hz |
| Operating Temperature | -20° to 60°        |
| Working Hours         | 50,000 Hrs.        |
| IP RATING             | IP44               |



Specification
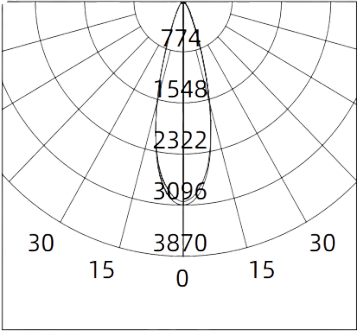
|                      |                                                                                                                                                                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LED CHIP             | BRIDGELUX                                                                                                                                                                                                                                                         |
| FINISH               | WH, BK                                                                                                                                                                                                                                                            |
| MATERIAL DESCRIPTION | HOUSING: DIE CAST ALUMINIUM<br>REFLECTOR: ALUMINIUM<br>DIFFUSER: PMMA OPAL PC LENS                                                                                                                                                                                |
| BEAM ANGLE           | 24°                                                                                                                                                                                                                                                               |
| DIMMING OPTION       |    |
| PHOTOMETRIC          |                                                                                                                                                                              |

Application

Modern Workspaces, Institutions, Small Format Retail Outlets

Hotels, High End Villas

Drawing

Unit: MM

