



COMO

STM-LMSCF

Overview

High-quality recessed fixture with die-cast aluminum body, efficient LED module, and anti-glare design. Available in various wattages, beam angles, and color temperatures for versatile applications.




Family Range


Code	Power	Dimension
SLM-10051-LM	20W	105*105*H115mm
SLM-12051-LM	30W	120*120*H130mm
SLM-15051-LM	35W	120*120*H130mm

Parameters

Efficiency	90lm/W
CRI	90
Adjustable	Yes
Power Factor	0.5
Input Voltage	AC220-240V 50/60Hz
Operating Temperature	-20° to 60°
Working Hours	50,000 Hrs.
IP RATING	IP44



Specification

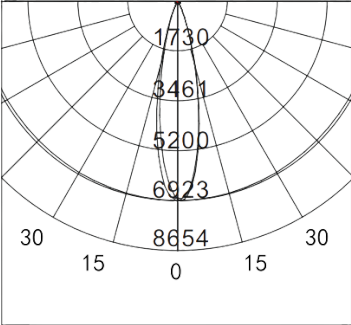LED CHIP	CREE
FINISH	WH, BK
MATERIAL DESCRIPTION	HOUSING: DIE CAST ALUMINIUM REFLECTOR: MIRROR FINISHED ALUMINIUM DIFFUSER: PMMA OPAL PC LENS
BEAM ANGLE	95°
DIMMING OPTION	  
PHOTOMETRIC	

Application

Modern Workspaces, Institutions, Small Format Retail Outlets

Hotels, High End Villas

Drawing

Unit: MM

