



RAGGIO

STM-GZ

Overview

High-quality recessed fixture with die-cast aluminum body, efficient LED module, and anti-glare design. Available in various wattages, beam angles, and color temperatures for versatile applications.




Family Range


Code	Power	Dimension
SLM-1212-GZ	12W	Φ82*H45mm
SLM-1218-GZ	18W	Φ105*H52mm
SLM-1224-GZ	24W	Φ129*H70mm

Parameters

Efficiency	80lm/W
CRI	90
Adjustable	No
Power Factor	0.5
Input Voltage	AC220-240V 50/60Hz
Operating Temperature	-20° to 60°
Working Hours	50,000 Hrs.
IP RATING	IP65



Specification

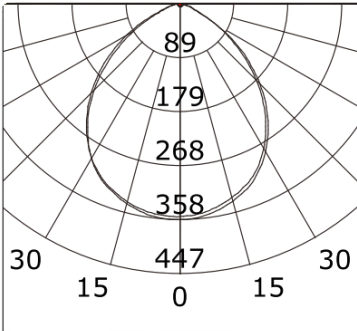LED CHIP	BRIDGELUX
FINISH	WH
MATERIAL DESCRIPTION	HOUSING: DIE CAST ALUMINIUM REFLECTOR: MIRROR FINISHED ALUMINIUM DIFFUSER: PMMA OPAL PC LENS
BEAM ANGLE	95°
DIMMING OPTION	  
PHOTOMETRIC	

Application

Modern Workspaces, Institutions, Small Format Retail Outlets

Hotels, High End Villas

Drawing

Unit: MM

