




RIGATO - S

STR-JB0

Overview

This is a **modern outdoor square bollard light** designed with an open-frame structure for architectural appeal. The light source is positioned at the top, projecting illumination downward to create a soft and uniform lighting effect on pathways and surrounding areas. Its geometric and minimal design makes it a stylish addition to contemporary landscapes.

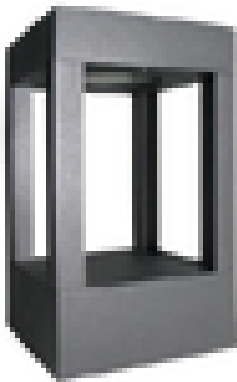


Family Range


Code	Power	Dimension
STR-6160	6W	195 X 105 X 105 mm

Parameters

Efficiency	80 lm/w
CRI	80
CCT	3000K
Adjustable	-
Power Factor	0.9
Input Voltage	AC 100-240V 50/60Hz
Operating Temperature	-30° to 50°
Working Hours	50,000 Hrs.
IP RATING	IP54



Specification

LED CHIP	CREE
FINISH	WH BK SILVER GREY DARK GREY
MATERIAL DESCRIPTION	HOUSING: DIE CAST ALUMINIUM
BEAM ANGLE	80°
DIMMING OPTION	  
PHOTOMETRIC	

Application

Pathway Lighting, Driveways & Entrances, Landscape Highlighting, Decorative Ambience, Perimeter Lighting

Drawing

Unit: M M

