



A N E W W A Y
O F L I F E
I S J U S T A
T O U C H A W A Y .



KEY FEATURES



Feather Touch Panel



Remote IR Control



Wi-Fi Control (Optional): Multiple units can be operated through a single mobile or a single unit can be operated through multiple mobiles



Ease of Install, Ease of use



Slim/Sleek Design



Retrofit Panel: Can be installed in Existing Wiring and Metal box



Curtain Control




Phase Dimming Control: Light brightness can be adjusted



Make Your Mood (Scenario Setting): Light setting as per choice



Safety (Surge Protection): Protection from voltage fluctuation

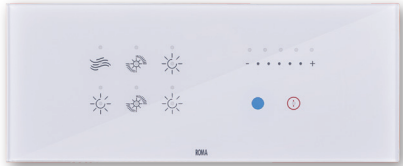

Item	Description	Light On/Off	Fan	Phase Dimming	Curtain	IR Remote	WiFi	HSN Code	MRP ₹ Per N (incl. of all taxes)	Standard Packing Quantity
4 MODULE SWITCH										
22987	3plus1 Basic	3	1	-	-	Small	-	8536	9427.00	1N
22988	3plus1 WiFi	3	1	-	-	Small	Yes	8536	15405.00	1N
6 MODULE SWITCH										
22989	5Plus1 Basic	5	1	-	-	Small	-	8536	13807.00	1N
22992	5plus1 Basic + WiFi	5	1	-	-	Small	Yes	8536	19695.00	1N
22990	5Plus1 Dimmable	3	1	2	-	Big	-	8536	15709.00	1N
22991	5Plus1 Dimmable, WiFi	3	1	2	-	Big	Yes	8536	23935.00	1N
8 MODULE SWITCH										
22995	6 Plus2 Basic	6	2	-	-	Big	-	8536	19305.00	1N
22998	6 Plus2- 6 lights, 2 fan + WiFi	6	2	-	-	Big	Yes	8536	25155.00	1N
22999	6 Plus2- 4Light, 2 fan, Curtain control	4	2	-	1	Big	-	8536	19598.00	1N
22993	6Plus2 Dimmable, Curtain Control	2	2	2	1	Big	-	8536	20046.00	1N
22994	6Plus2 Dimmable, Curtain Control, WiFi	2	2	2	1	Big	Yes	8536	28111.00	1N
REMOTE										
22996	Small IR Remote Control for 1 dot 3/1 dot 5 Basic	-	-	-	-	-	-	8536	653.00	1N
22997	IR Remote Big (Spare)	-	-	-	-	-	-	8536	912.00	1N

*Product Fitted in Anchor Metal Box.

TECHNICAL SPECIFICATIONS

THE HUMAN SIDE OF TECHNOLOGY.



Supply Control - 240V $\pm 10\%$ 50Hz Single Phase



Humidity - 0% to 95% RH non-condensing



Operating Condition - 0° to 40°C ambient temperature



Fan Regulator and Curtain - 2A Inductive



Power Consumption -
For 3Plus1: 2 Watts
For 5Plus1: 2.5 Watts
For 6Plus2: 3 Watts



Light Load -
5A Resistive - Incandescent bulb
2A Capacitive - CFL & LED lights



Brownout/Sag Protection - A brownout is an intentional or unintentional drop/cut in voltage/power in an electrical power supply system

PANASONIC LIFE SOLUTIONS INDIA PVT. LTD.

Corporate & Head Office: 3rd Floor, B Wing, I-Think Techno Campus,
Pokharan Road No.2, Thane (W), Thane - 400 607, Maharashtra.
Tel. 022 4222 8888 | Fax. 022 4222 8884
Customer Care no.: 022-41304130 | WhatsApp: 9136028606
Email: wecare@in.panasonic.com | www.lsin.panasonic.com

Registered Office: 12th Floor, Ambience Tower, Ambience Island,
NH-48, Gurugram - 122 002, Haryana.

Distributor / Dealer Stamp

www.facebook.com/AnchorPanasonic

www.twitter.com/AnchorPanasonic

<https://in.linkedin.com/company/anchor-panasonic>

www.instagram.com/anchorpanasonic/