

PING

Koło Naukowe
Politechniki Gdańskiej

Scripts for Hack5 tools





Screen Crab

Presented by Miłosz Obrębski



Screen Crab is a hacking tool developed by Hak5. Designed to appear as a harmless video adapter or dongle. It functions as a man-in-the-middle video proxy. The device sits between the source device and the monitor, it allows for screen capture recording, remote live streaming of visual data over Wi-Fi, and spying on a target's on-screen activity without triggering any operating system alerts.



Use cases:

- Remote grabbing of sensitive data
- Remote control when paired with for example Key Croc
- Recording videos

Author of this presentation is not responsible for any non educational use cases, only use the device within the law



Configuration

How to make it work?



Screen grab after boot loads **config** file from the sd card. The most important thing is to configure the wi-fi, other settings were left as they were

```
# #
# # / | / | \ | | / | \ | ^ | ) #
# (\/) (\/) \ | | | ) | | | \ | | | | ) | ^ | \ | \ #
# ||'oo'// ) | | | < | | | \ | | | | < / | \ | | ) | #
# ./ W W \ . | / \ | | \ \ | | | \ | \ | \ \ / \ \ | \ \ | / #
# # Screen Crab by Hak5 v1 #
#####
```

```
LED ON
CAPTURE_MODE IMAGE
CAPTURE_INTERVAL 5
STORAGE FILL
BUTTON EJECT
```

```
WIFI_SSID hak5
WIFI_PASS 12345678
```



C2 C1oud

Dedicated management solution
for hak5 devices







Hak5

This site has no description.

Online Devices (1)

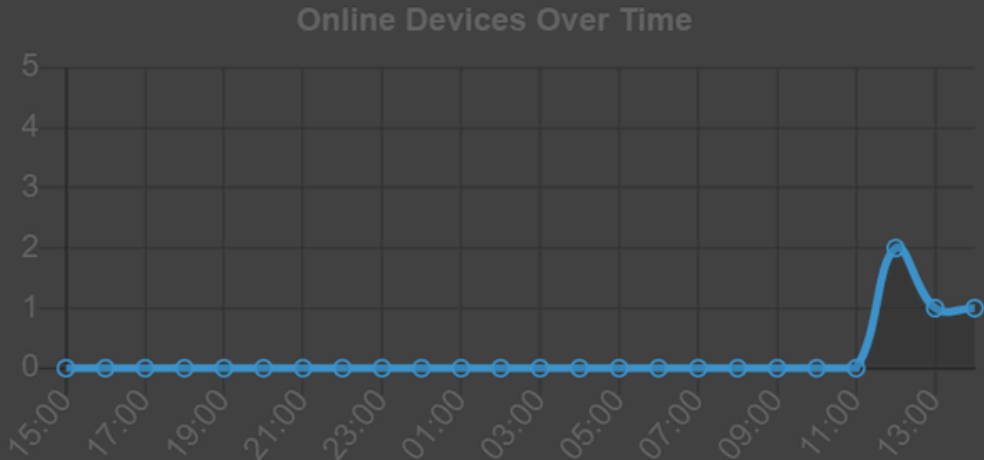

Device Types (3)

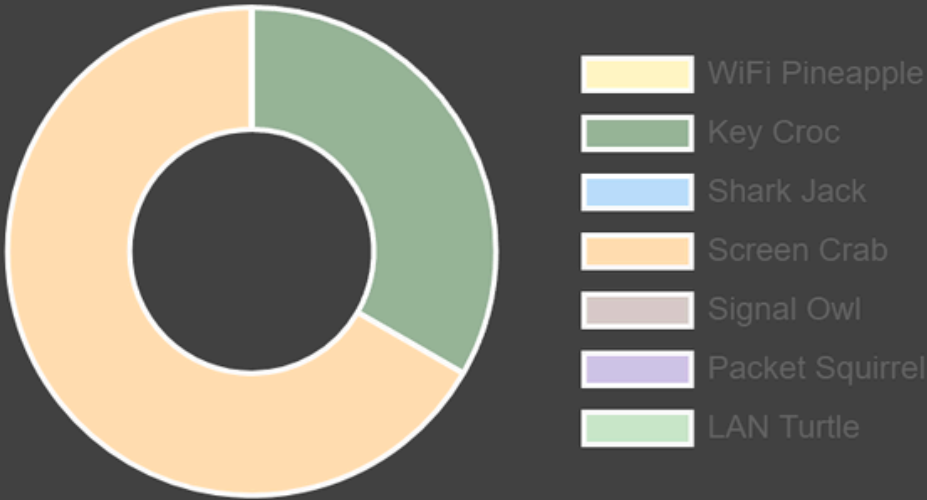

Devices

☐ Only Show Online Devices

 Filter

☐ ▼	Name	Description	Uptime	Last Seen	Firmware	Device MAC	LAN IP	External IP	Total RX/TX
☐ ● 	Video crab		Offline	1h 19m ago	1.0.6	7C:A7:B0:1E:6A:1E	192.168.137.111	10.1.1.1	7.60 MB
☐ ● 	Key croc		Offline	1h 49m ago	1.4_568	94:A4:08:0D:AF:3A	172.20.10.3	10.1.1.1	362.28 KB
☐ ● 	crab2		23m 14s	0m 3s ago	1.0.6	7C:A7:B0:1E:6A:1E	192.168.137.51	10.1.1.1	48.52 M

Chat



C2 Cloud interface allows:

- to configure the devices without using the sd
- to collect loot
- to remotely access target computer
- to read logs
- to see statistics eg. uptime

To add a device the **device.config** file is placed in the root directory of the device. This file is generated from the dashboard

C2 cloud is meant to be self-hosted on a public server which the Hak5 device can access



The script

Student id grabber



The script is written in python and uses api of C2 Cloud to fetch and process images


The main feature of the script is stealthily saving screenshots of student ids on pg login website.

Images are taken by default every 10s, the script downloads latest one and uses opencv to detect logo of PG to detect if the user is on the login website.

It is very easy to modify the search image



First we need to connect the device to the target computer. Video output from PC goes to Screen Crab and output of screen crab goes to the monitor

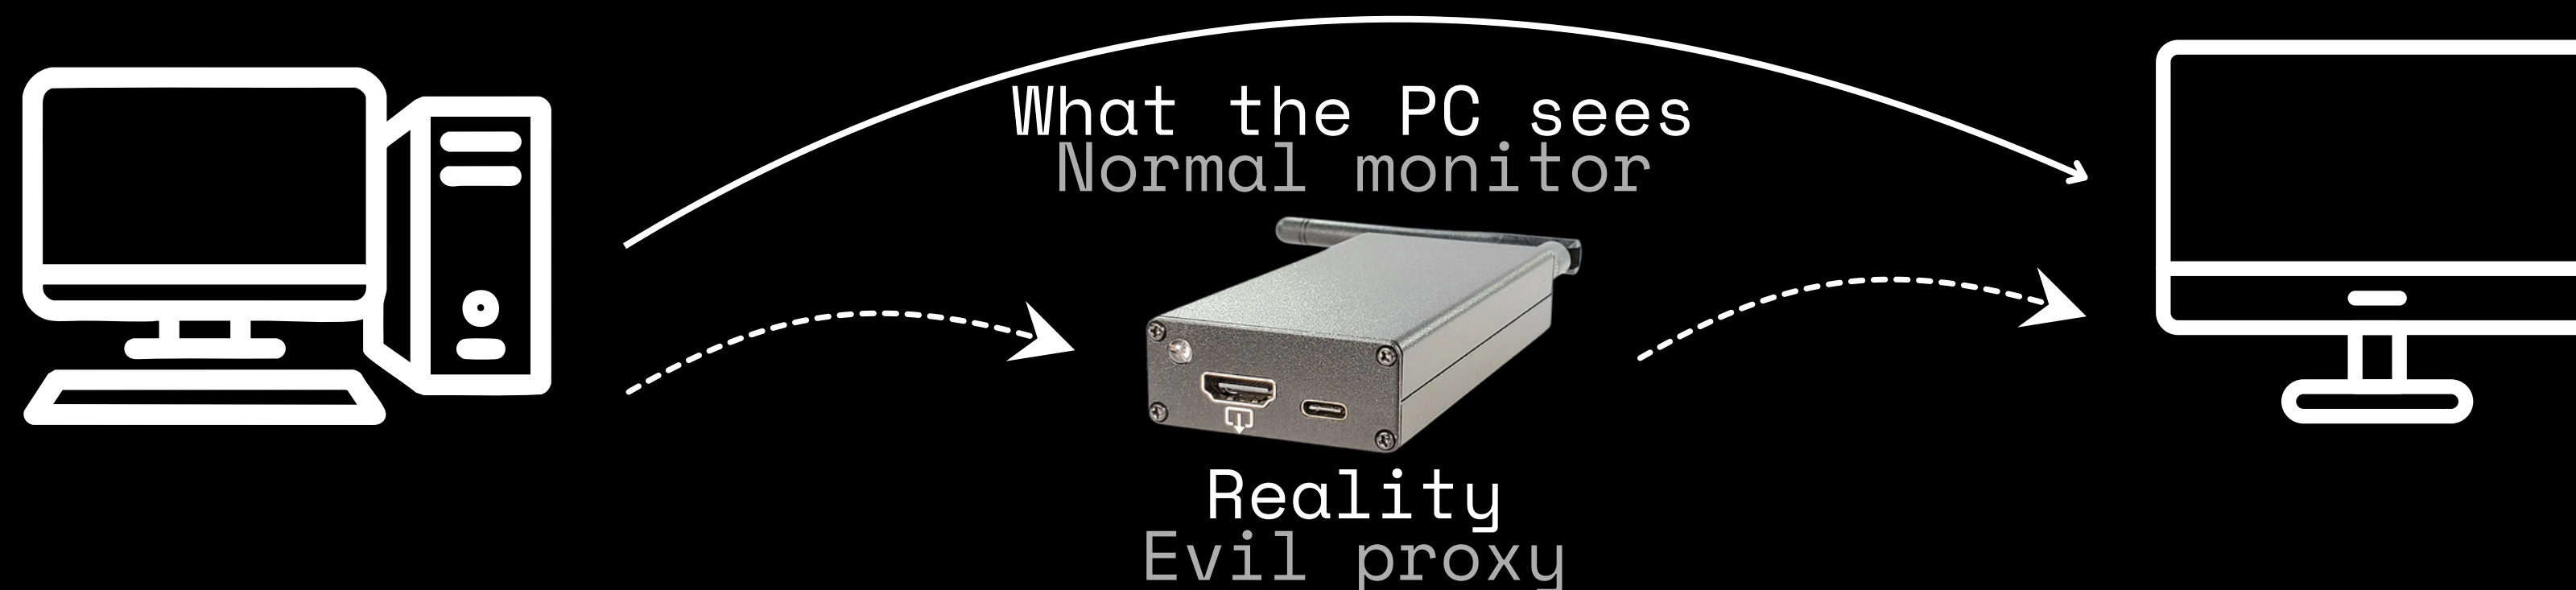



Centralny Punkt Logowania

Polski English

University identifier:

Hasło:

Zaloguj

Wyczyść

[Nie pamiętam hasła](#)

Lub zaloguj przez:


[Login.gov.pl](#)

Kliknięcie przekieruje na login.gov.pl, co pozwala zalogować się np. przez profil zaufany lub e-dowód.

Copyright © 2008–2026 Centrum Usług Informatycznych



Camera Stream

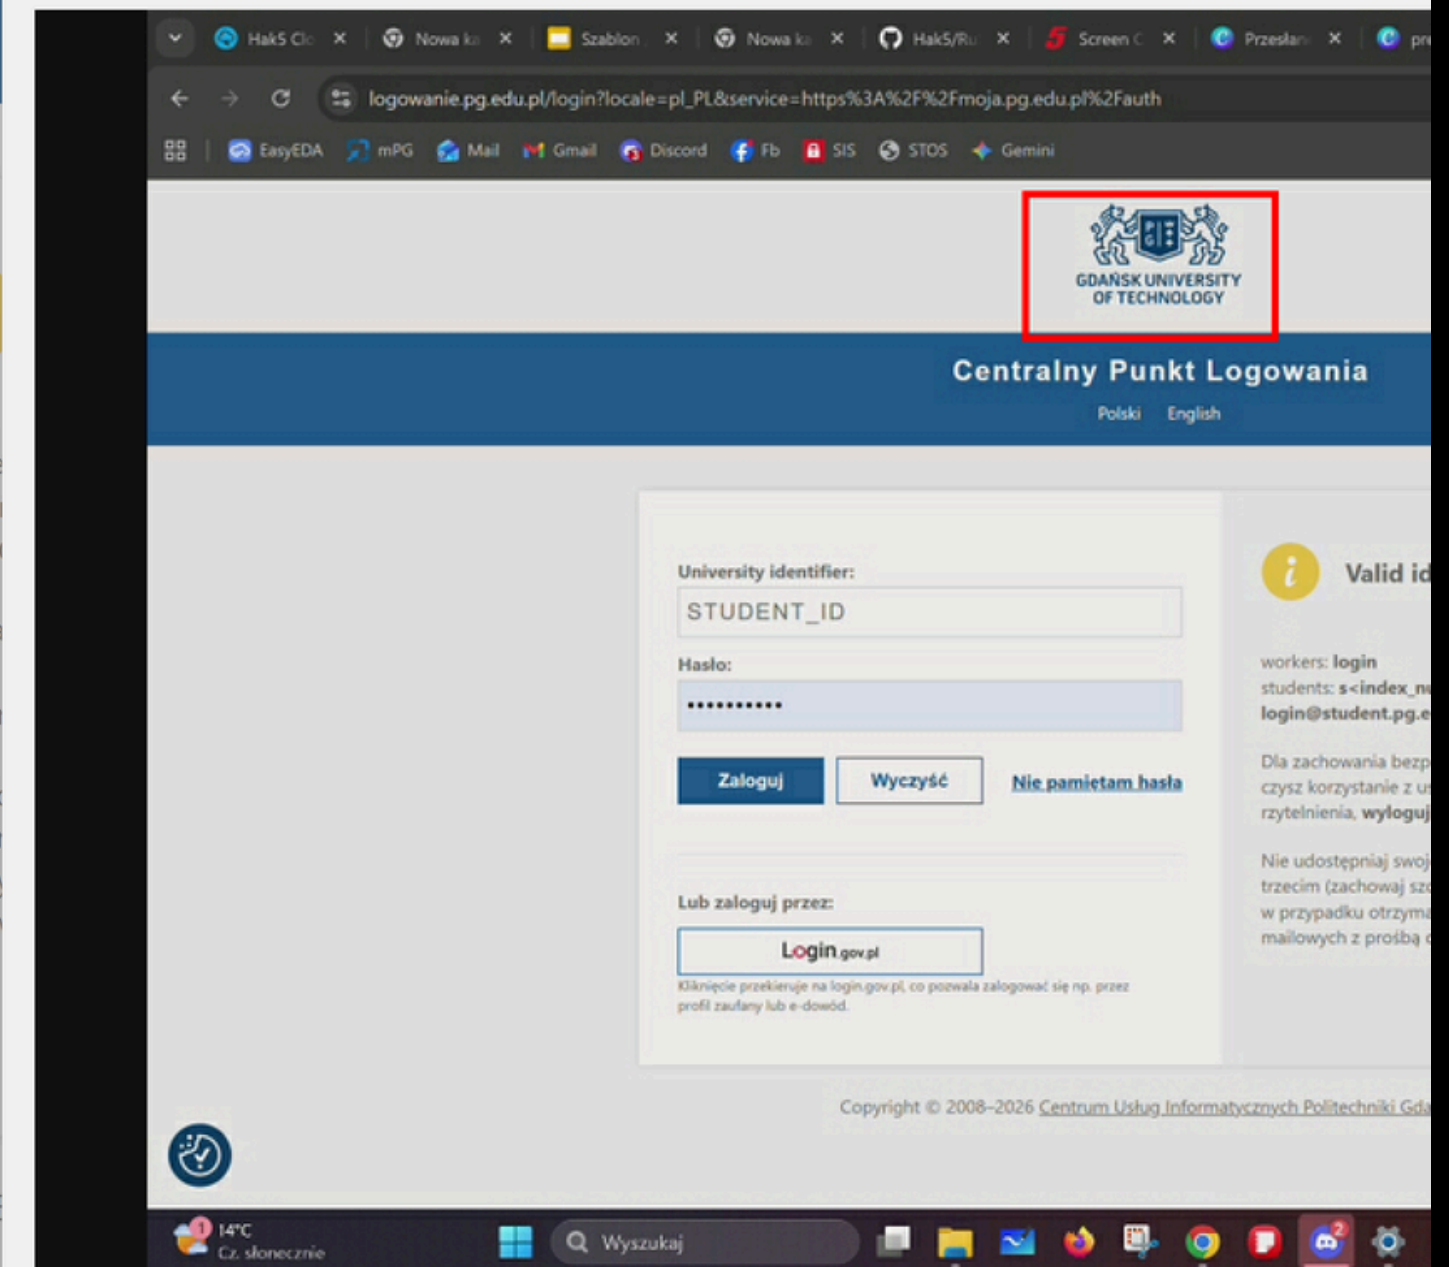

Target found (score=1.000). Saved: output\detected_202605



Once PG logo was detected in the image the script saved that image to disk for further analysis

output

detected_20260514_142629.png
 detected_20260514_142640.png
 detected_20260514_142651.png
 detected_20260514_142804.png
 detected_20260514_161039.png
 detected_20260514_161049.png
 detected_20260514_161100.png

output > detected_20260514_161100.png

Target found (score: 1.000). Saved: output/detected_20260514_161100.png



PING

Koło Naukowe
Politechniki Gdańskiej

THE END

Screen Crab
Presented by Miłosz Obrębski

