GIS ROUTING | LIVE API COMPARISON

Urbiztondo, Pangasinan - identical route inputs, separate standalone sample

Measured 2026-10-18 18:37 PHT | 3 routes x 2 rounds x 2 APIs | passenger-car routing

Geoapify

6/6 successful requests | 1,046 ms median latency


Live commercial API endpoint

OSRM


6/6 successful requests | 900 ms median latency

FOSSGIS public OSRM car endpoint


API response latency

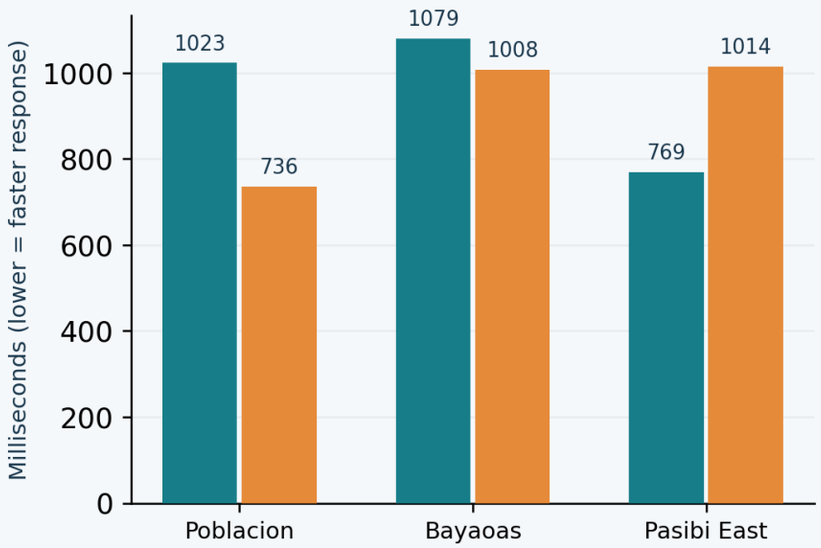

Returned route distance

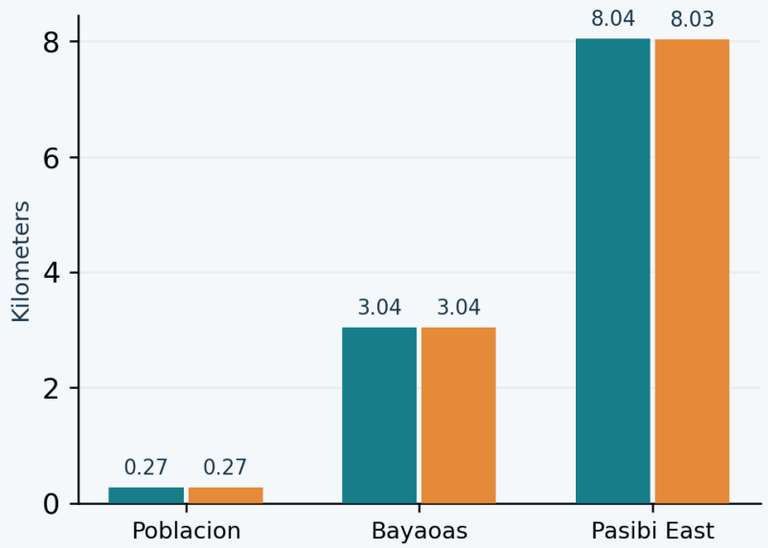

Estimated driving time

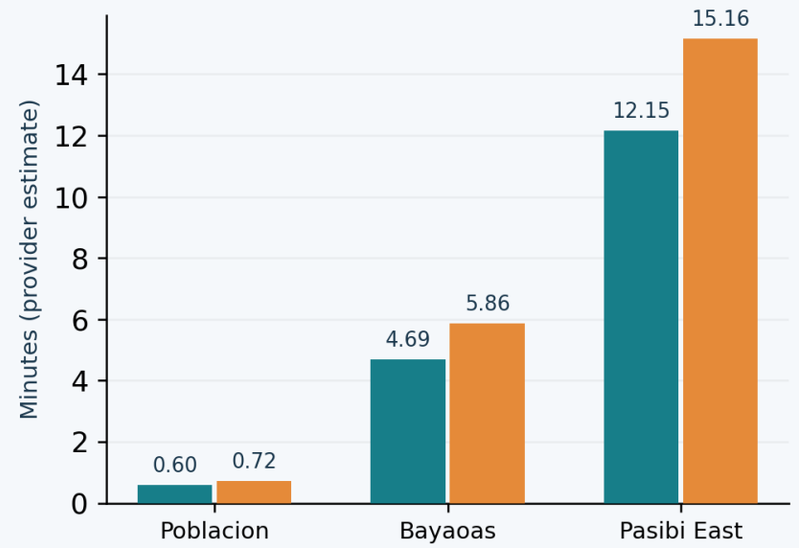



HOW TO READ THE RESULTS

Latency measures the entire HTTPS response body, including connection and network overhead. Bars show medians of successful requests per route; failures are retained in results.json.

Both APIs receive the same origin and destinations. Calls alternate provider order by round, are spaced at least 1.1 seconds apart, and use no application cache or automatic retries. Provider-side caches are uncontrolled.

Distance and driving time describe each API's chosen route. Differences do not establish accuracy: no field-verified route or travel-time reference was collected. This small run cannot establish long-term reliability.

Coordinates come from the project seeders: sample station (15.8222000, 120.3297000) to three barangay halls. These are demo coordinates, not verified fire incident locations. Estimated driving time is not emergency response time.

Sources: Geoapify Routing API documentation; OSRM HTTP API documentation; routing.openstreetmap.de usage policy.

Map data: OpenStreetMap contributors | Fix the map: https://www.openstreetmap.org/ | Endpoint details and full measurements accompany this figure.