MOSFET - Power, Single N-Channel, STD Gate, SO8FL

80 V, 1.43 mΩ, 253 A

NTMFWS1D5N08X

$V_{(BR)DSS}$	$R_{DS(ON)}$ MAX	I_D MAX
80 V	1.43 mΩ @ 10 V	253 A



N−CHANNEL MOSFET

Features

- Low Q_{RR}, Soft Recovery Body Diode
- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- These Devices are Pb−Free, Halogen−Free/BFR−Free and are RoHS Compliant

Applications

- Synchronous Rectification (SR) in DC−DC and AC−DC
- Primary Switch in Isolated DC−DC Converter
- Motor Drives



DFNW5
(SO8FL WF)
CASE 507BA

MARKING DIAGRAM



1D5N08 = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 5 of this data sheet.

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain−to−Source Voltage		V_{DSS}	80	V
Gate−to−Source Voltage		V_{GS}	±20	V
Continuous Drain Current (Note 1)	T_C = 25°C	I_D	253	A
	T_C = 100°C		179	
Power Dissipation (Note 1)	T_C = 25°C	P_D	194	W
Pulsed Drain Current	T_C = 25°C, t_p = 100 μs	I_{DM}	1071	A
Pulsed Source Current (Body Diode)		I_{SM}	1071	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	−55 to +175	°C
Source Current (Body Diode)		I_S	303	A
Single Pulse Avalanche Energy (I_{PK} = 67 A) (Note 3)		E_{AS}	225	mJ
Lead Temperature for Soldering Purposes (1/8″ from case for 10 s)		T_L	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The entire application environment impacts the thermal resistance values shown. They are not constants and are only valid for the particular conditions noted.
2. Actual continuous current will be limited by thermal & electromechanical application board design.
3. E_{AS} of 225 mJ is based on started T_J = 25°C, I_{AS} = 67 A, V_{DD} = 64 V, V_{GS} = 10 V, 100% avalanche tested

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction−to−Case	$R_{\theta JC}$	0.77	°C/W
Thermal Resistance, Junction−to−Ambient (Notes 4, 5)	$R_{\theta JA}$	39	

4. Surface−mounted on FR4 board using a 1 in^2, 1 oz. Cu pad.
5. $R_{\theta JA}$ is determined by the user's board design.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain−to−Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 1 mA	80			V
Drain−to−Source Breakdown Voltage Temperature Coefficient	$\Delta V_{(BR)DSS}/\Delta T_J$	I_D = 1 mA, Referenced to 25°C		17.8		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 80 V, T_J = 25°C			1	μA
		V_{DS} = 80 V, T_J = 125°C			250	
Gate−to−Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = 20 V			100	nA
ON CHARACTERISTICS						
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V, I_D = 50 A		1.24	1.43	mΩ
		V_{GS} = 6 V, I_D = 33 A		1.9	2.5	
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 330 μA	2.4		3.6	V
Gate Threshold Voltage Temperature Coefficient	$\Delta V_{GS(TH)}/\Delta T_J$	V_{GS} = V_{DS}, I_D = 330 μA		−7.32		mV/°C
Forward Transconductance	g_{FS}	V_{DS} = 5 V, I_D = 50 A		176		S
CHARGES, CAPACITANCES & GATE RESISTANCE						
Input Capacitance	C_{ISS}	V_{GS} = 0 V, V_{DS} = 40 V, f = 1 MHz		5880		pF
Output Capacitance	C_{OSS}			1690		
Reverse Transfer Capacitance	C_{RSS}			25		
Output Charge	Q_{OSS}			121		nC
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 6 V, V_{DD} = 40 V; I_D = 50 A		51		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 10 V, V_{DD} = 40 V; I_D = 50 A		83		
Threshold Gate Charge	$Q_{G(TH)}$			18		
Gate−to−Source Charge	Q_{GS}			27		
Gate−to−Drain Charge	Q_{GD}			13		
Gate Plateau Voltage	V_{GP}			4.6		V
Gate Resistance	R_G	f = 1 MHz		0.6		Ω
SWITCHING CHARACTERISTICS						
Turn−On Delay Time	$t_{d(ON)}$	Resistive Load, V_{GS} = 0/10 V, V_{DD} = 40 V, I_D = 50 A, R_G = 2.5 Ω		24		ns
Rise Time	t_r			9		
Turn−Off Delay Time	$t_{d(OFF)}$			43		
Fall Time	t_f			9		
SOURCE−TO−DRAIN DIODE CHARACTERISTICS						
Forward Diode Voltage	V_{SD}	V_{GS} = 0 V, I_S = 50 A, T_J = 25°C		0.81	1.2	V
		V_{GS} = 0 V, I_S = 50 A, T_J = 125°C		0.66		
Reverse Recovery Time	t_{RR}	V_{GS} = 0 V, I_S = 50 A, dI/dt = 1000 A/μs, V_{DD} = 40 V		32		ns
Charge Time	t_a			19		
Discharge Time	t_b			13		
Reverse Recovery Charge	Q_{RR}			224		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL CHARACTERISTICS

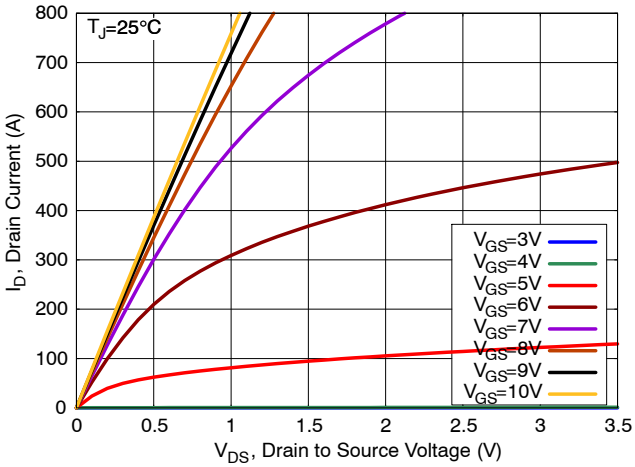

Figure 1. On−Region Characteristics

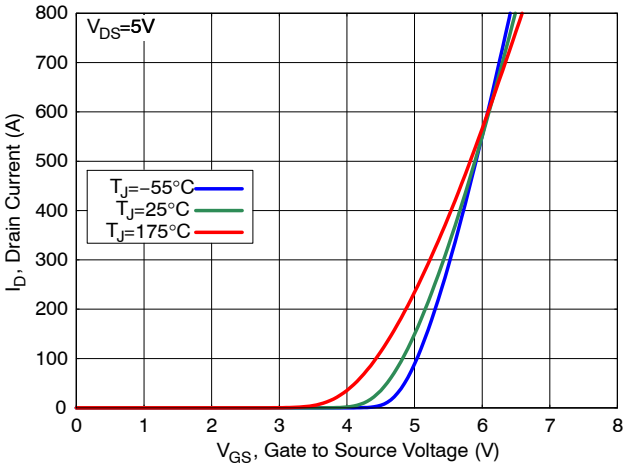

Figure 2. Transfer Characteristics

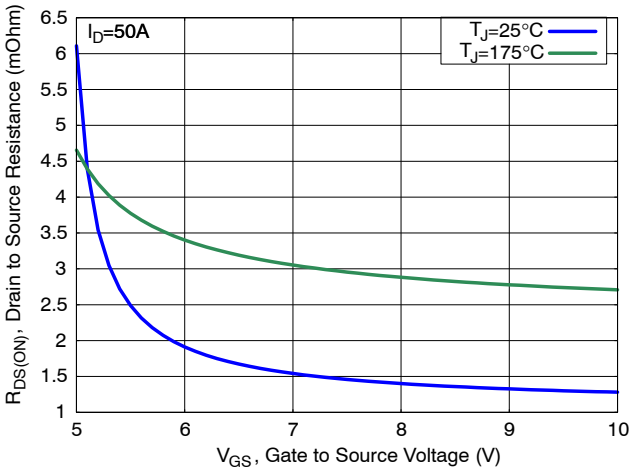

Figure 3. On−Resistance vs. Gate Voltage

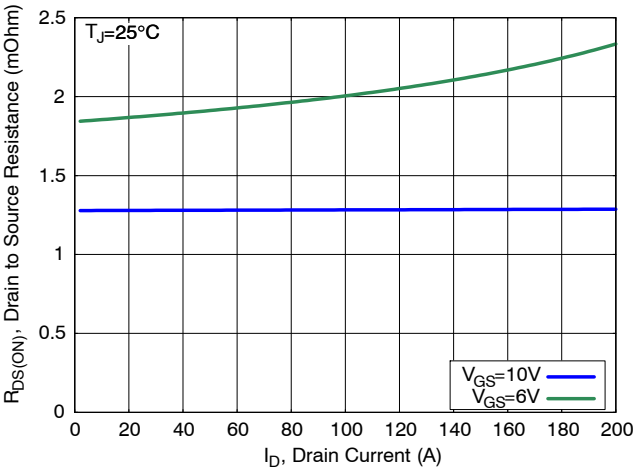

Figure 4. On−Resistance vs. Drain Current

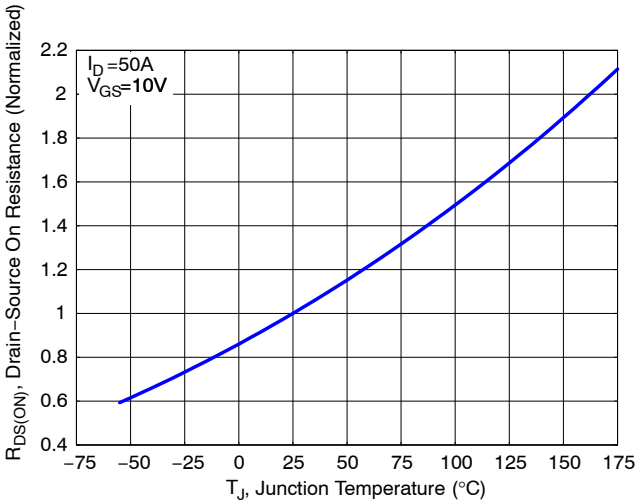

Figure 5. Normalized On−Resistance vs. Junction Temperature

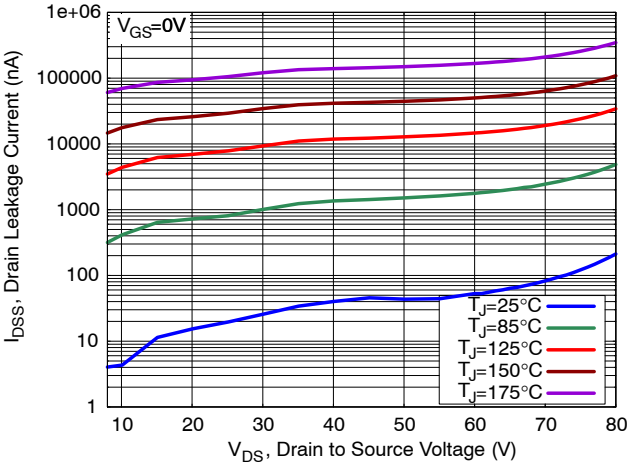

Figure 6. Drain Leakage Current vs. Drain Voltage

TYPICAL CHARACTERISTICS

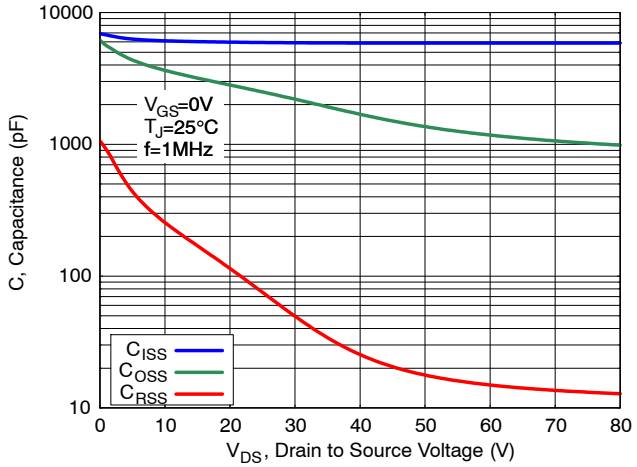

Figure 7. Capacitance Characteristics

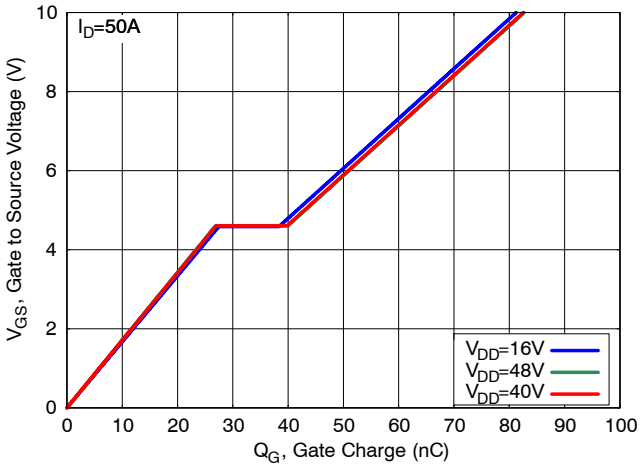

Figure 8. Gate Charge Characteristics

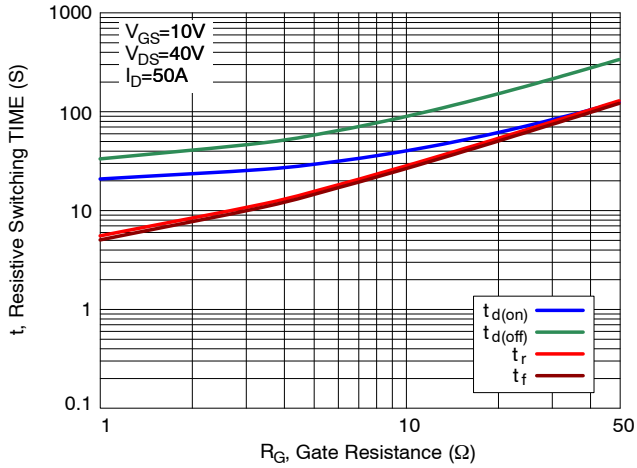

Figure 9. Resistive Switching Time Variation vs. Gate Resistance

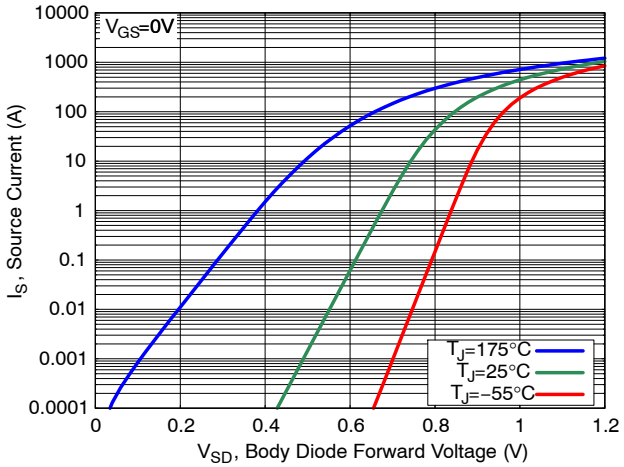

Figure 10. Diode Forward Characteristics

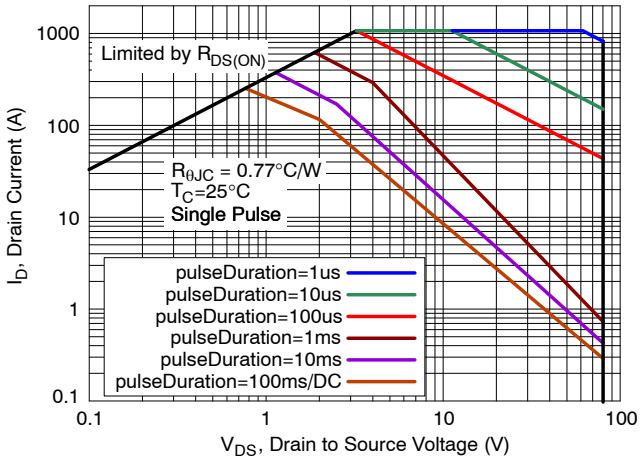

Figure 11. Safe Operating Area (SOA)

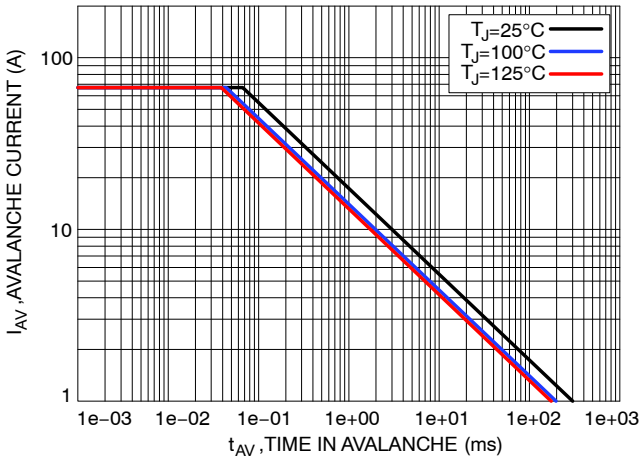

Figure 12. Avalanche Current vs. Pulse Time (UIS)

TYPICAL CHARACTERISTICS

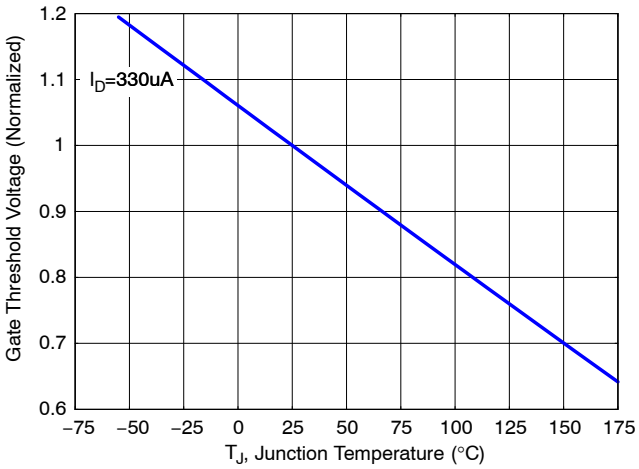

Figure 13. Gate Threshold Voltage vs. Junction Temperature

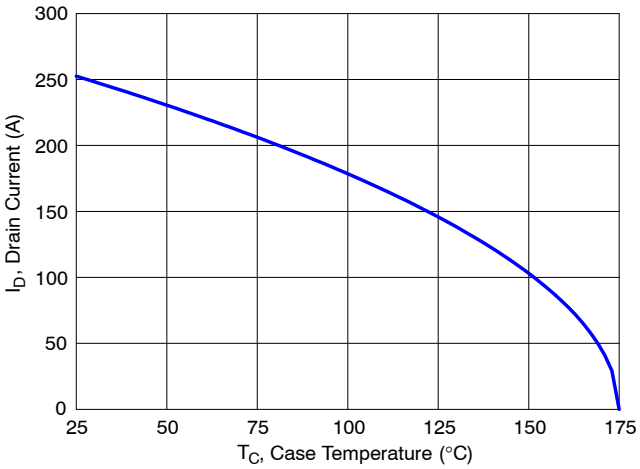

Figure 14. Maximum Current vs. Case Temperature

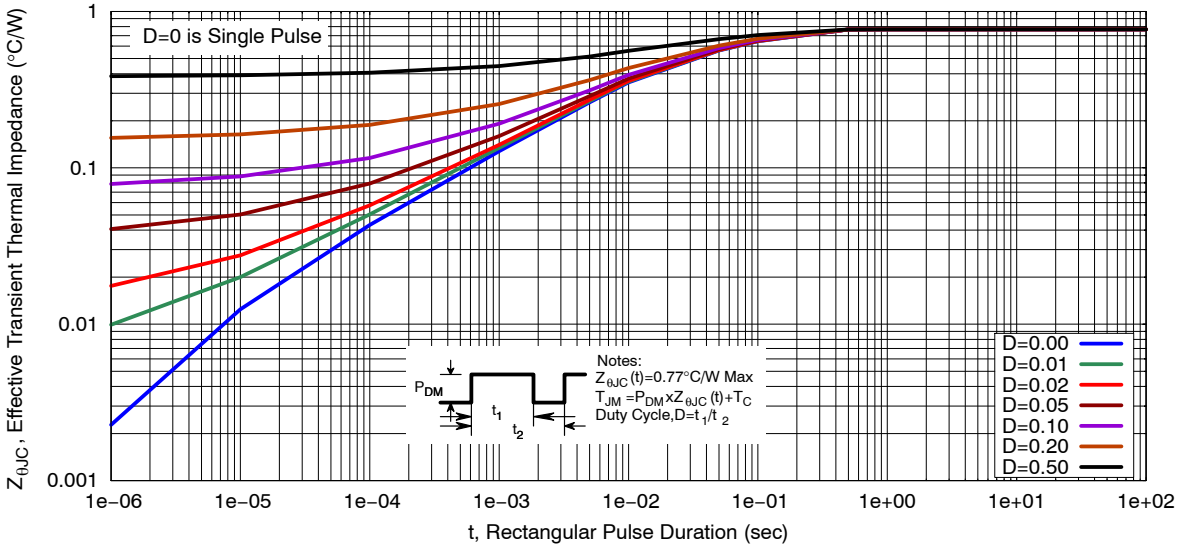

Figure 15. Transient Thermal Response

DEVICE ORDERING INFORMATION

Device	Marking	Package	Shipping†
NTMFWS1D5N08XT1G	1D5N08	DFNW5 (Pb−Free)	1500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



DFNW5 4.90x5.90x1.00, 1.27P
CASE 507BA
ISSUE B

DATE 15 JUL 2024

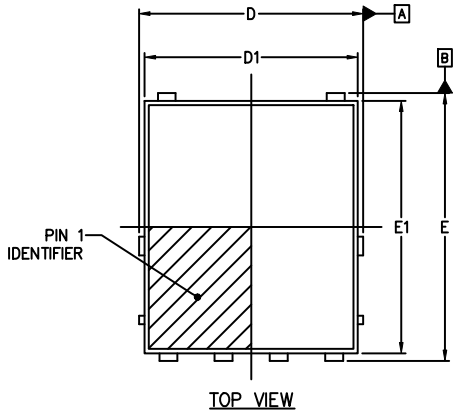





NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M−2018.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
4. THIS PACKAGE CONTAINS WETTABLE FLANK DESIGN FEATURES TO AID IN FILLET FORMATION ON THE LEADS DURING MOUNTING.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.00	0.25	0.05
b	0.33	0.41	0.51
c	0.23	0.28	0.33
D	5.00	5.15	5.30
D1	4.70	4.90	5.10
D2	3.80	4.00	4.20
E	6.00	6.15	6.30
E1	5.70	5.90	6.10
E2	3.45	3.65	3.85
E3	3.00	3.40	3.80
e	1.27 BSC		
k	1.20	1.35	1.50
L	0.51	0.57	0.71
L2	0.15 REF.		
θ	0°	6°	12°

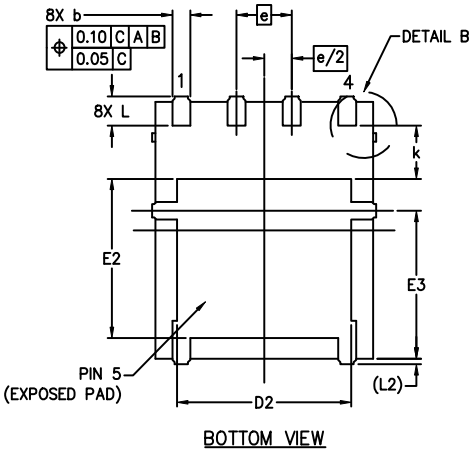

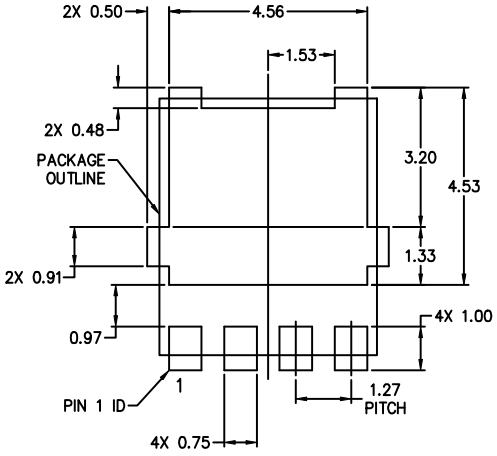

*FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXXXXX	=	Specific Device Code
A	=	Assembly Location
Y	=	Year
W	=	Work Week
ZZ	=	Lot Traceability

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON26450H**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**DFNW5 4.90x5.90x1.00, 1.27P**	**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales