IXYS

Trench™ Power MOSFET

IXTA180N10T
IXTP180N10T

V_{DSS} = 100V
I_{D25} = 180A
$R_{DS(on)}$ ≤ 6.4mΩ

N-Channel Enhancement Mode
Avalanche Rated



TO-263 (IXTA)



TO-220 (IXTP)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C	100	V
V_{DGR}	T_J = 25°C to 175°C, R_{GS} = 1MΩ	100	V
V_{GSS}	Continuous	± 20	V
V_{GSM}	Transient	± 30	V
I_{D25}	T_C = 25°C (Chip Capability)	180	A
$I_{L(RMS)}$	External Lead Current Limit	120	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	450	A
I_A	T_C = 25°C	25	A
E_{AS}	T_C = 25°C	750	mJ
P_D	T_C = 25°C	480	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-55 ... +175	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
F_C	Mounting Force (TO-263)	10..65 / 2.2..14.6	N/lb
M_d	Mounting Torque (TO-220)	1.13 / 10	Nm/lb.in
Weight	TO-263	2.5	g
	TO-220	3.0	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 250μA	100			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 250μA	2.5		4.5	V
I_{GSS}	V_{GS} = ± 20V, V_{DS} = 0V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			5	μA
	T_J = 150°C			100	μA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 25A, Notes 1& 2		5.7	6.4	mΩ

Features

- Ultra-Low On Resistance
- Avalanche Rated
- Low Package Inductance
  - Easy to Drive and to Protect
- 175°C Operating Temperature
- Fast Intrinsic Diode

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- Automotive
  - Motor Drives
  - 42V Power Bus
  - ABS Systems
- DC/DC Converters and Off-line UPS
- Primary Switch for 24V and 48V Systems
- Distributed Power Architechtures and VRMs
- Electronic Valve Train Systems
- High Current Switching Applications
- High Voltage Synchronous Recifier

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	70	110		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		6900		pF
C_{oss}			923		pF
C_{rss}			162		pF
$t_{d(on)}$	**Resistive Switching Times**		33		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 25A		54		ns
$t_{d(off)}$	R_G = 3.3Ω (External)		42		ns
t_f			31		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 25A		151		nC
Q_{gs}			39		nC
Q_{gd}			45		nC
R_{thJC}				0.31	°C/W
R_{thCH}	TO-220		0.50		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			180	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			450	A
V_{SD}	I_F = 25A, V_{GS} = 0V, Note 1			0.95	V
t_{rr}	I_F = 90A, V_{GS} = 0V		72		ns
I_{RM}	-di/dt = 100A/μs, V_R = 50V		5.1		A
Q_{RM}			0.18		μC

Notes: 1. Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.
2. On through-hole packages, $R_{DS(on)}$ Kelvin test contact location must be 5mm or less from the package body.

TO-263 Outline

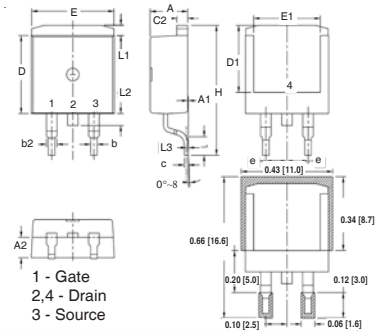

1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES MIN	INCHES MAX	MILLIMETER MIN	MILLIMETER MAX
A	.170	.185	4.30	4.70
A1	.000	.008	0.00	0.20
A2	.091	.098	2.30	2.50
b	.028	.035	0.70	0.90
b2	.046	.060	1.18	1.52
C	.018	.024	0.45	0.60
C2	.049	.060	1.25	1.52
D	.340	.370	8.63	9.40
D1	.300	.327	7.62	8.30
E	.380	.410	9.65	10.41
E1	.270	.330	6.86	8.38
e	.100 BSC		2.54 BSC	
H	.580	.620	14.73	15.75
L	.075	.105	1.91	2.67
L1	.039	.060	1.00	1.52
L2	—	.070	—	1.77
L3	.010 BSC		0.254 BSC	

TO-220 Outline

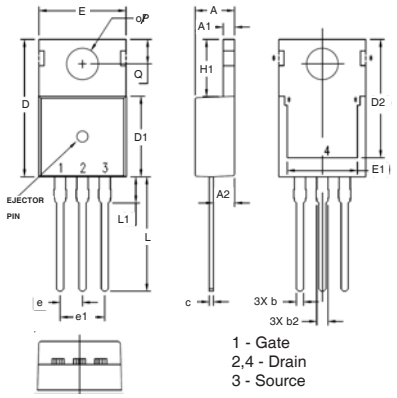

1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.169	.185	4.30	4.70
A1	.047	.055	1.20	1.40
A2	.079	.106	2.00	2.70
b	.024	.039	0.60	1.00
b2	.045	.057	1.15	1.45
c	.014	.026	0.35	0.65
D	.587	.626	14.90	15.90
D1	.335	.370	8.50	9.40
(D2)	.500	.531	12.70	13.50
E	.382	.406	9.70	10.30
(E1)	.283	.323	7.20	8.20
e	.100 BSC		2.54 BSC	
e1	.200 BSC		5.08 BSC	
H1	.244	.268	6.20	6.80
L	.492	.547	12.50	13.90
L1	.110	.154	2.80	3.90
øP	.134	.150	3.40	3.80
Q	.106	.126	2.70	3.20

Fig. 1. Output Characteristics @ T_J = 25°C

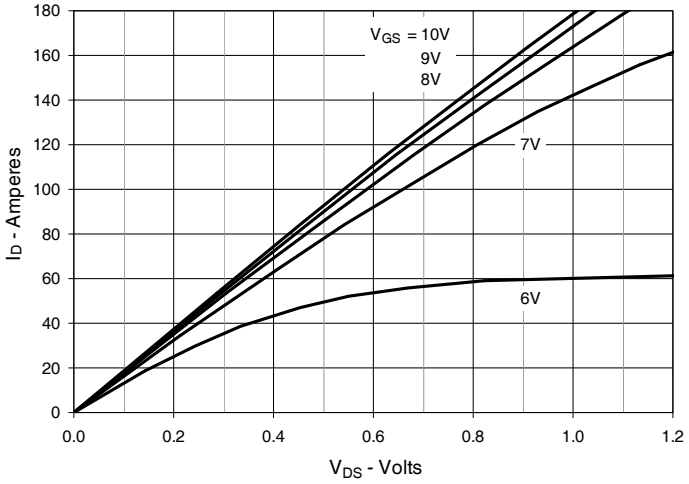

Fig. 2. Extended Output Characteristics @ T_J = 25°C

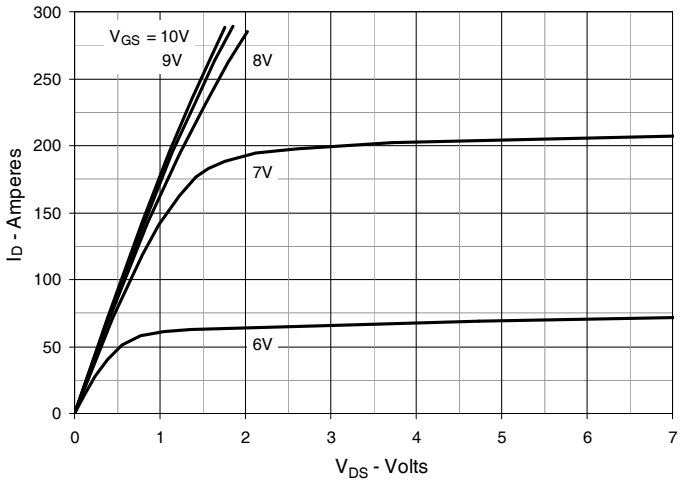

Fig. 3. Output Characteristics @ T_J = 150°C

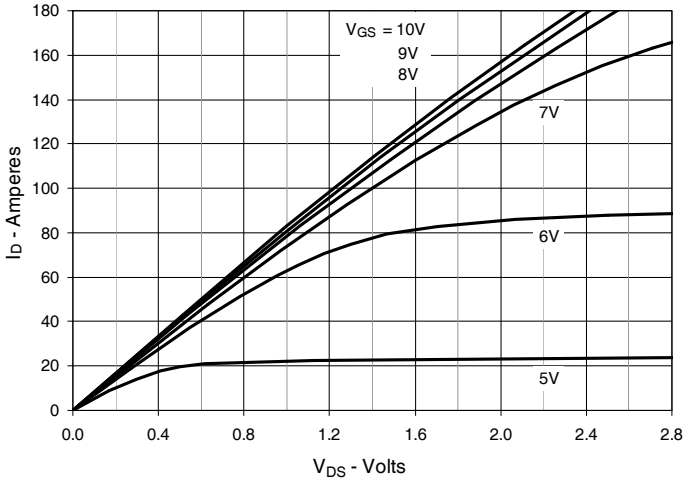

Fig. 4. $R_{DS(on)}$ Normalized to I_D = 90A Value vs. Junction Temperature

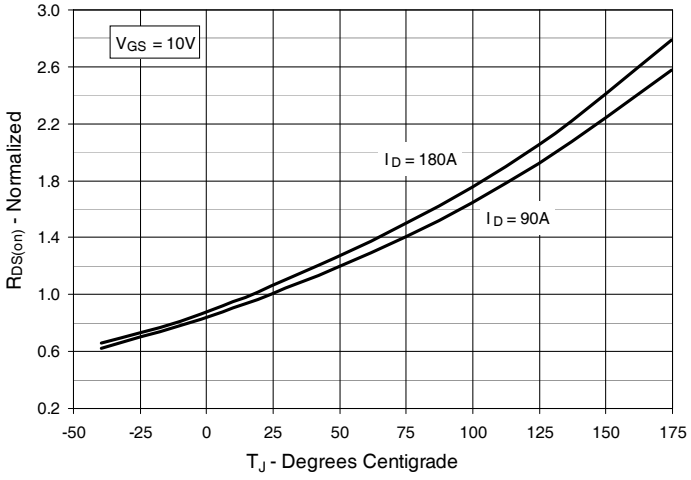

Fig. 5. $R_{DS(on)}$ Normalized to I_D = 90A Value vs. Drain Current

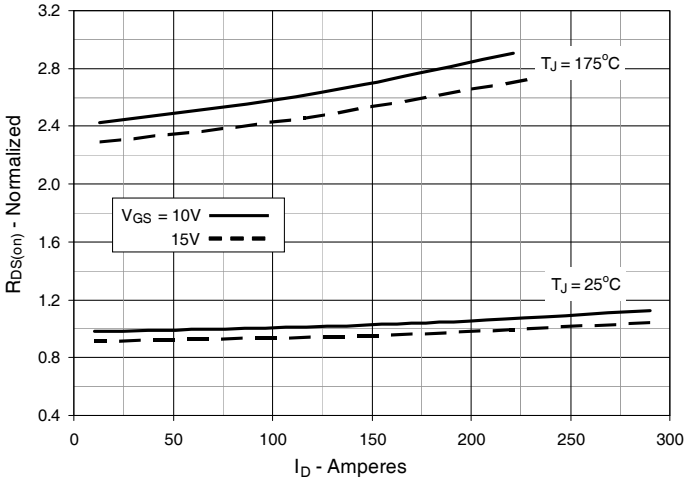

Fig. 6. Drain Current vs. Case Temperature

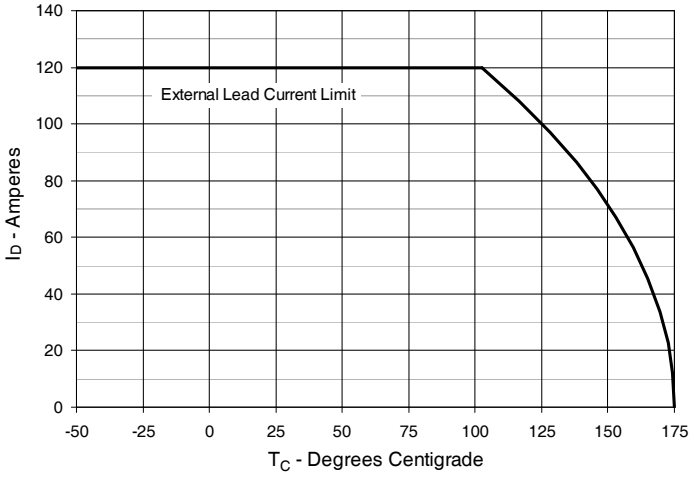

Fig. 7. Input Admittance

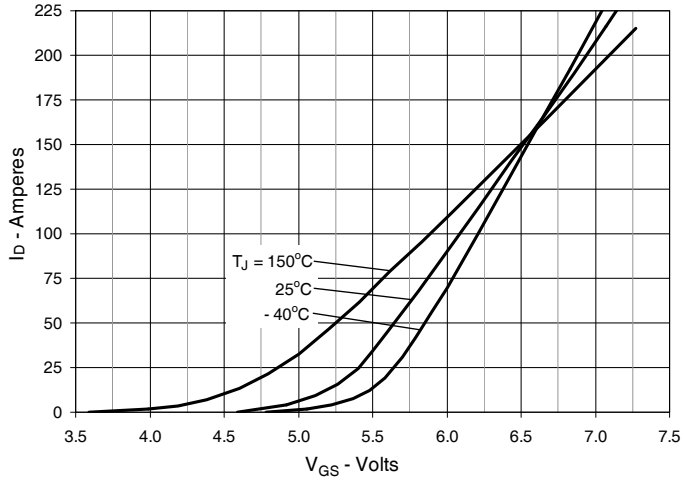

Fig. 8. Transconductance

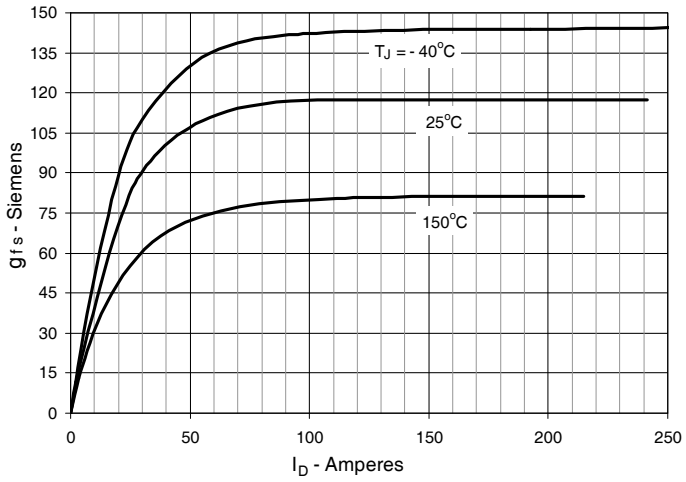

Fig. 9. Forward Voltage Drop of Intrinsic Diode

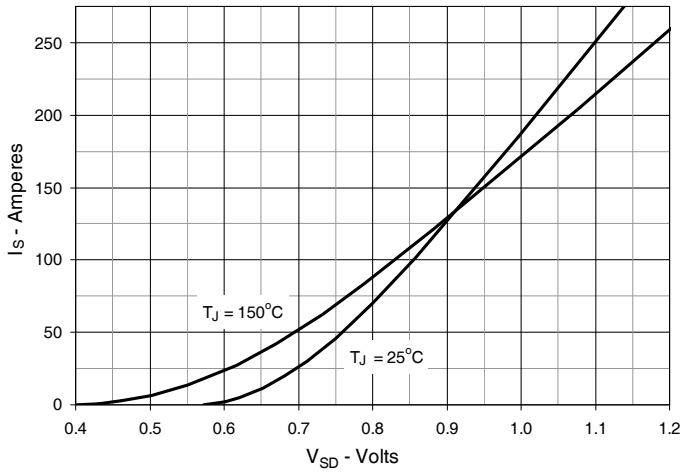

Fig. 10. Gate Charge

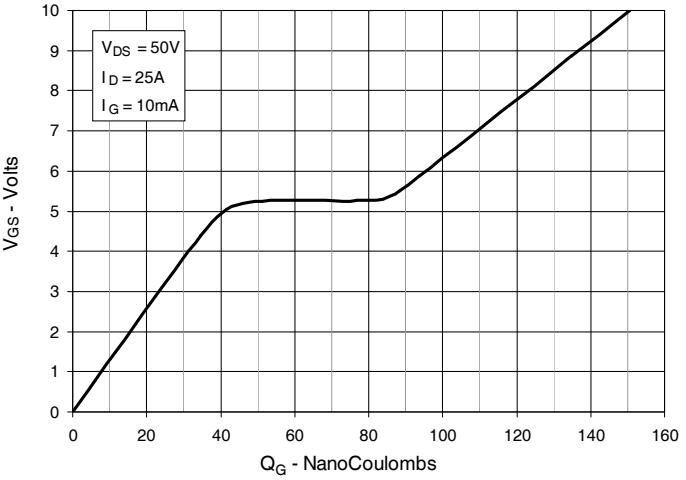

Fig. 11. Capacitance

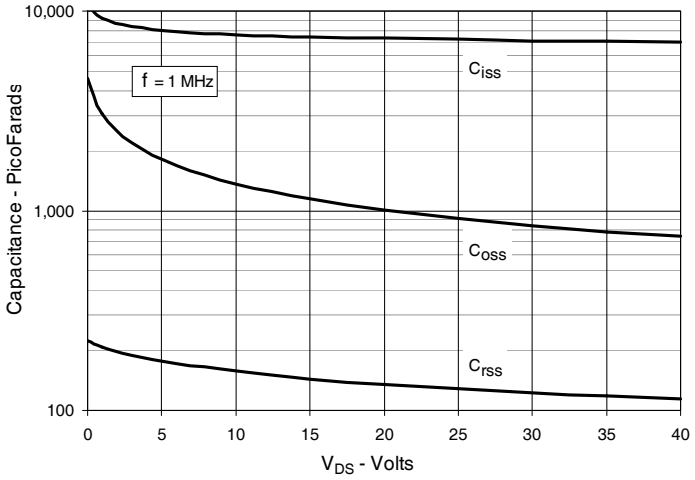

Fig. 12. Forward-Bias Safe Operating Area

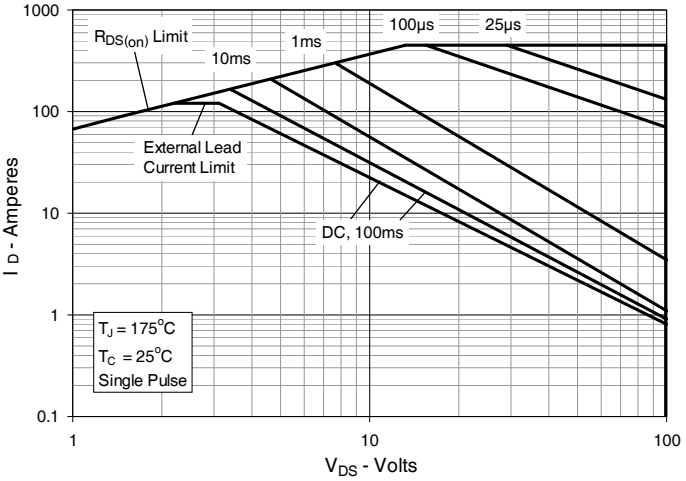

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

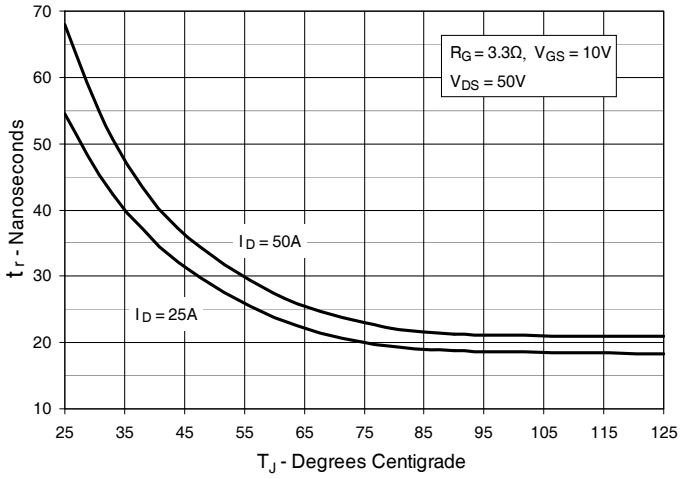

Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

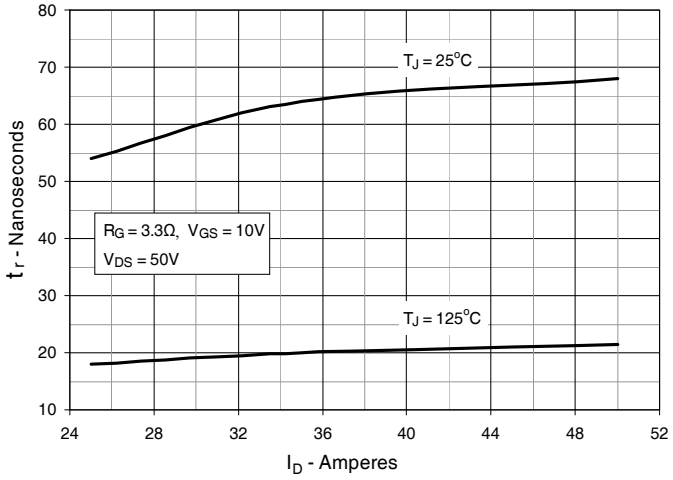

Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

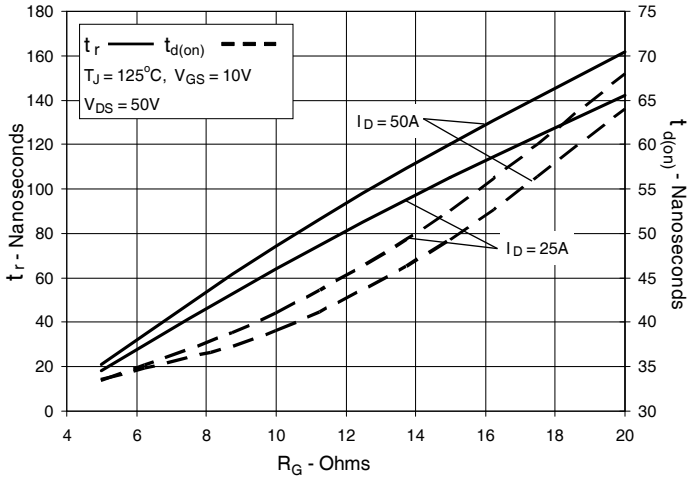

Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

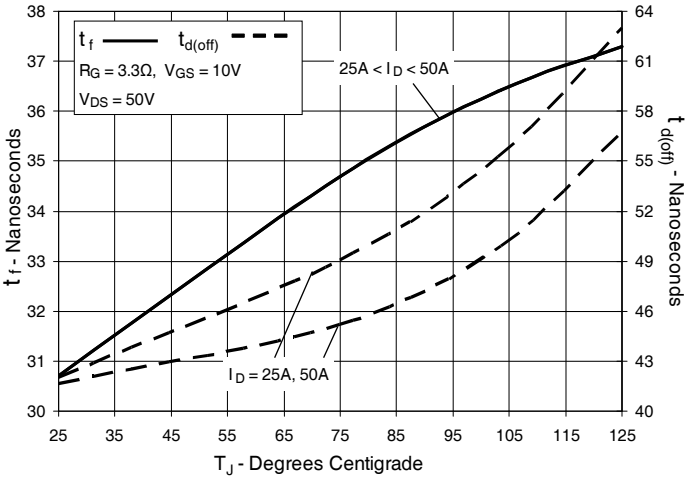

Fig. 17. Resistive Turn-off Switching Times vs. Drain Current

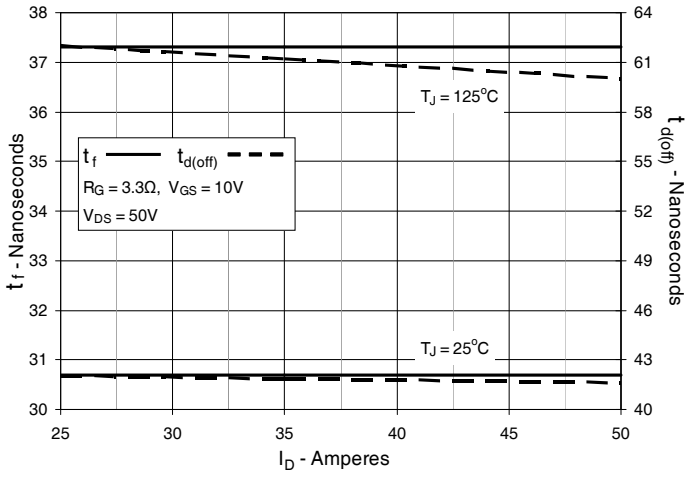

Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance

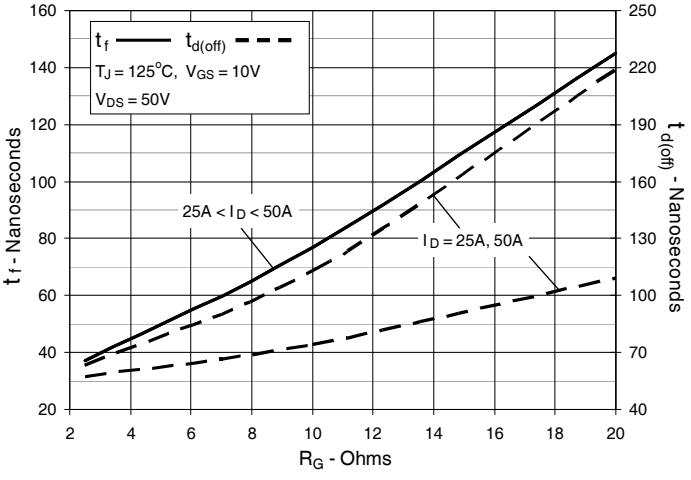

Fig. 19. Maximum Transient Thermal Impedance

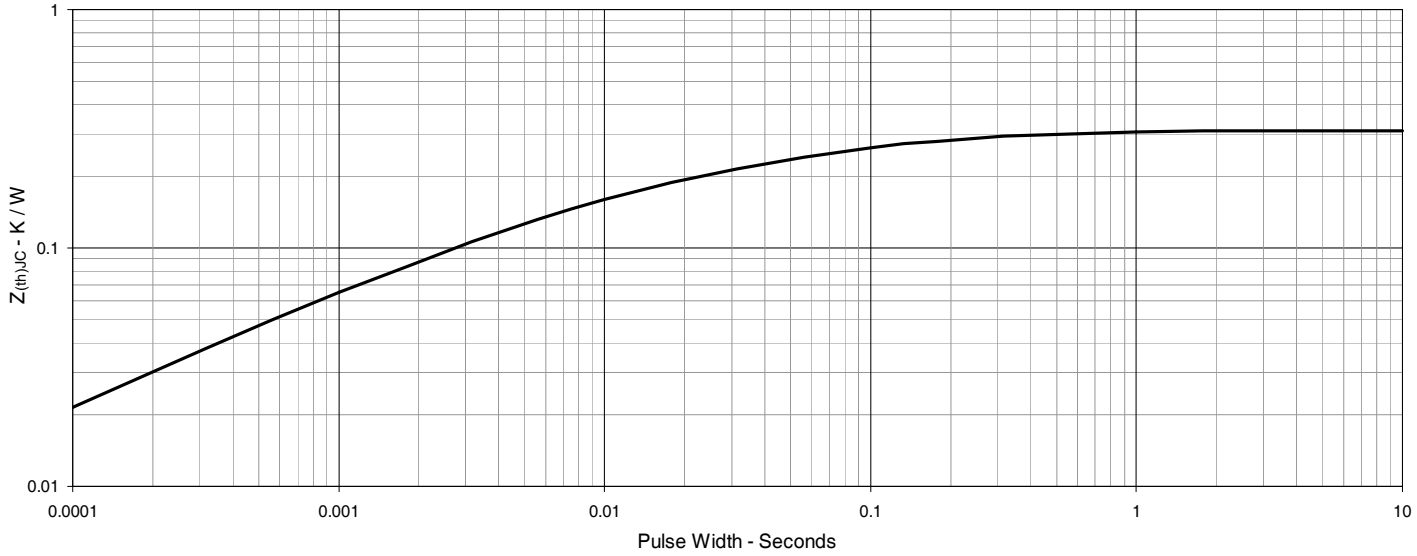

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IXYS:

IXTA180N10T-TRL