MOSFET - Power, Single N-Channel, DUAL COOL®, DFN8

80 V, 4.0 mΩ, 136 A

NTMFSC004N08MC

V_{SSS}	$R_{SS(ON)}$ MAX	I_D MAX
80 V	4.0 mΩ @ 10 V	136 A
	8.5 mΩ @ 6 V	

N−Channel MOSFET

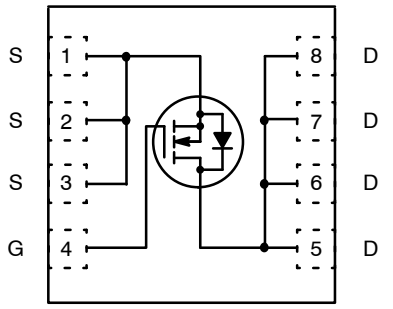

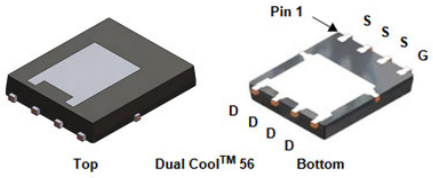

DFN8 5x6.15
CASE 506EG

Features

- Advanced Dual−Sided Cooled Packaging
- Ultra Low $R_{DS(on)}$ to Minimize Conduction Losses
- MSL1 Robust Packaging Design
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

Typical Applications

- Orring FET/Load Switching
- Synchronous Rectifier
- DC−DC Conversion

MAXIMUM RATINGS (T_J = 25°C, Unless otherwise specified)

Parameter			Symbol	Value	Unit
Drain−to−Source Voltage			V_{DSS}	80	V
Gate−to−Source Voltage			V_{GS}	±20	V
Continuous Drain Current $R_{\theta JC}$ (Note 2)	Steady State	T_C = 25°C	I_D	136	A
Power Dissipation $R_{\theta JC}$ (Note 2)	Steady State	T_C = 25°C	P_D	127	W
Continuous Drain Current $R_{\theta JA}$ (Note 1, 2)	Steady State	T_A = 25°C	I_D	80	A
Power Dissipation $R_{\theta JA}$ (Note 1, 2)	Steady State	T_A = 25°C	P_D	3.2	W
Pulsed Drain Current	T_A = 25°C, t_p = 10 μs		I_{DM}	487	A
Operating Junction and Storage Temperature Range			T_J, T_{stg}	−55 to +150	°C
Source Current (Body Diode)			I_S	157	A
Single Pulse Drain−to−Source Avalanche Energy (I_{AV} = 55 A, L = 0.1 mH)			E_{AS}	178	mJ
Lead Temperature Soldering Reflow for Soldering Purposes (1/8″ from case for 10 s)			T_L	300	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface−mounted on FR4 board using 1 in^2 pad size, 1 oz Cu pad.
2. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.

MARKING DIAGRAM



3F = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
Z = Assembly Lot Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

THERMAL CHARACTERISTICS

Symbol	Parameter	Max	Unit
$R_{\theta JC}$	Junction–to–Case – Steady State	0.98	°C/W
$R_{\theta JT}$	Junction–to–Case Top – Steady State	1.49	
$R_{\theta JA}$	Junction–to–Ambient – Steady State (Note 1)	39	

ORDERING INFORMATION

Device	Device Marking	Package	Shipping†
NTMFSC004N08MC	4N08MC	DFN8 5x6.15 (Pb–Free/Halogen Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Drain – to – Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 μA		80			V
Drain – to – Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}$ / T_J	I_D = 250 μA, ref to 25°C			0.05		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0 V, V_{DS} = 80 V	T_J = 25°C			10	μA
			T_J = 125°C			250	
Gate – to – Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±20 V				±100	nA
ON CHARACTERISTICS (Note 3)							
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 250 μA		2.0	2.9	4.0	V
Negative Threshold Temperature Coefficient	$V_{GS(TH)}$ / T_J	I_D = 250 μA, ref to 25°C			–6.5		mV/°C
Drain – to – Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V, I_D = 44 A			3.1	4.0	mΩ
		V_{GS} = 6 V, I_D = 22 A			5.0	8.5	
Gate–Resistance	R_G	T_A = 25°C			1.3		Ω
CHARGES & CAPACITANCES							
Input Capacitance	C_{ISS}	V_{GS} = 0 V, f = 1 MHz, V_{DS} = 40 V			2980		pF
Output Capacitance	C_{OSS}				950		
Reverse Transfer Capacitance	C_{RSS}				50		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 6 V, V_{DS} = 40 V, I_D = 22 A			27.8		nC
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 10 V, V_{DS} = 40 V, I_D = 22 A			43.4		
Gate–to–Source Charge	Q_{GS}				15		
Gate–to–Drain Charge	Q_{GD}				7		
SWITCHING CHARACTERISTICS (Note 3)							
Turn – On Delay Time	$t_{d(ON)}$	V_{GS} = 10 V, V_{DS} = 40 V, I_D = 44 A, R_G = 2.5 Ω			11.7		ns
Rise Time	t_r				21.5		
Turn – Off Delay Time	$t_{d(OFF)}$				28.7		
Fall Time	t_f				5.4		
DRAIN–SOURCE DIODE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	V_{GS} = 0 V, I_S = 44 A	T_J = 25°C		0.83	1.30	V
			T_J = 125°C		0.69		
Reverse Recovery Time	t_{RR}	V_{GS} = 0 V, dI_S/dt = 100 A/μs, I_S = 44 A			44		ns
Reverse Recovery Charge	Q_{RR}				50		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

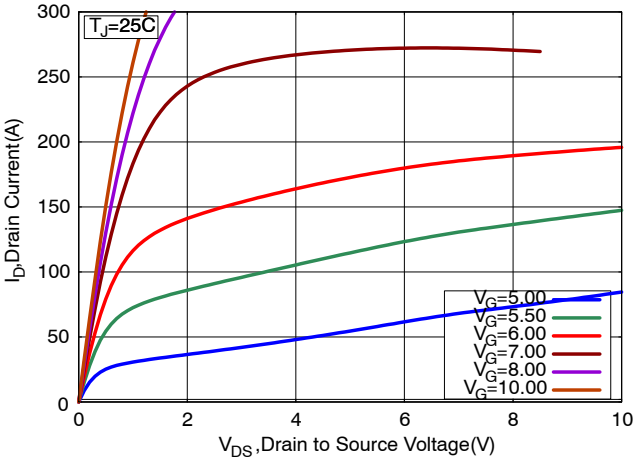

Figure 1. On−Region Characteristics

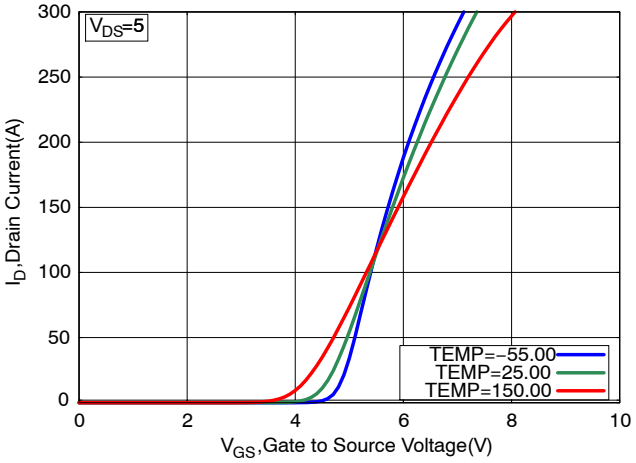

Figure 2. Transfer Characteristics

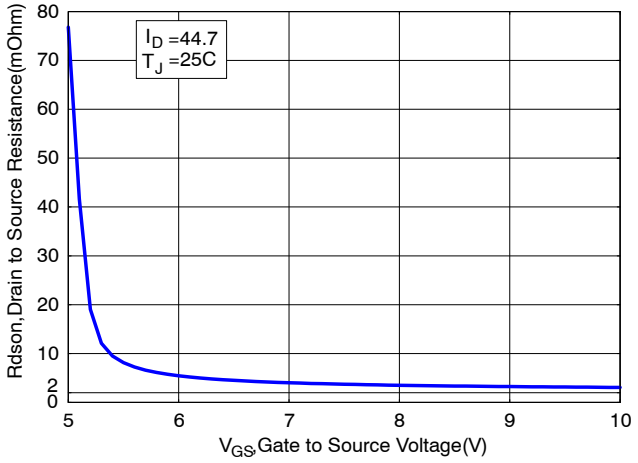

Figure 3. On−Resistance vs. V_{GS}

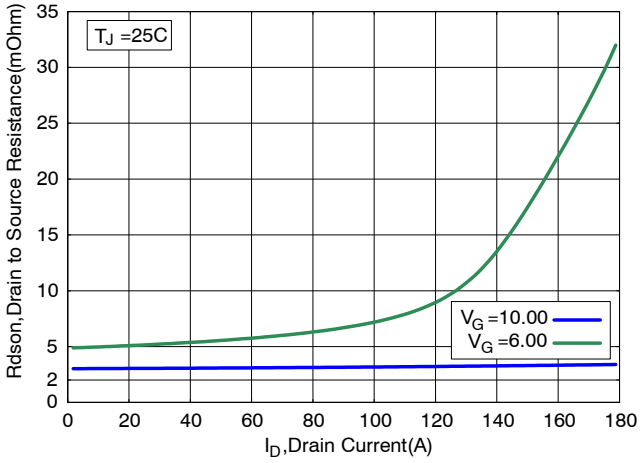

Figure 4. On−Resistance vs. Drain Current and Gate Voltage

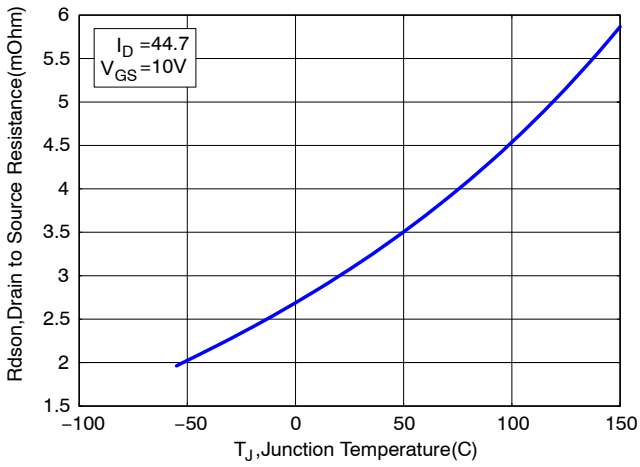

Figure 5. On−Resistance Variation with Temperature

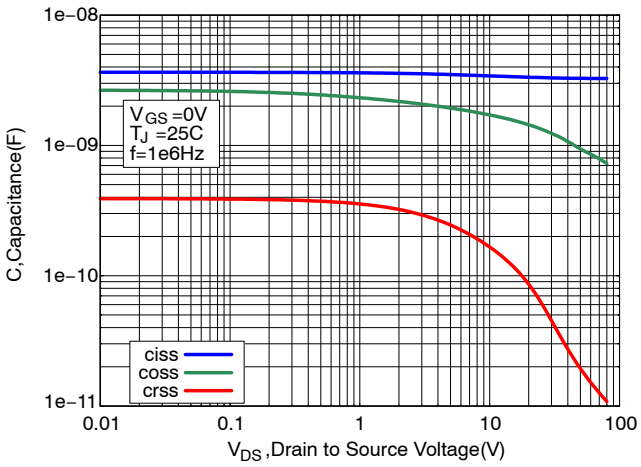

Figure 6. Capacitance Variation

TYPICAL CHARACTERISTICS

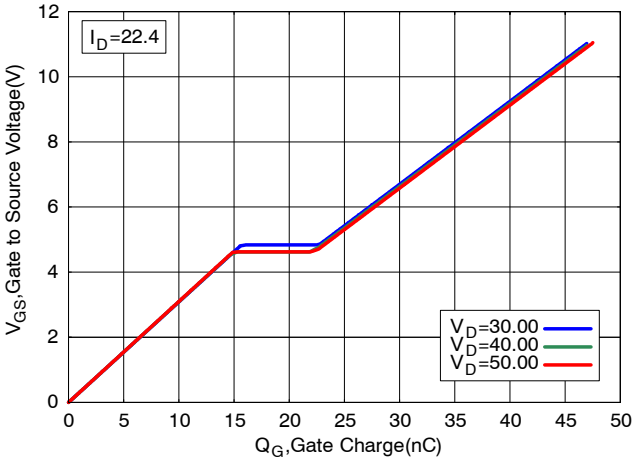

Figure 7. Gate−to−Source Voltage vs. Total Charge

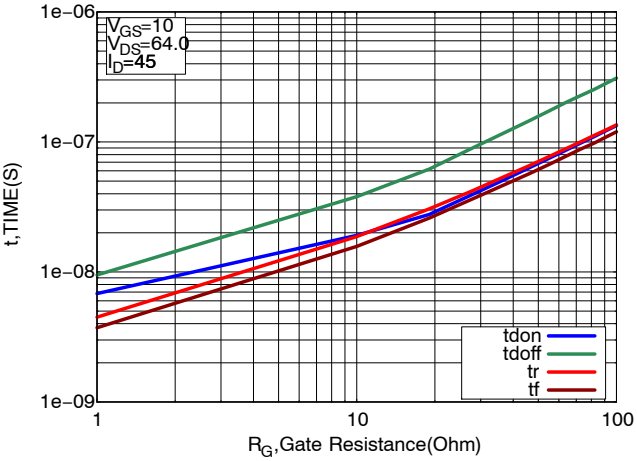

Figure 8. Resistive Switching Time Variation vs. Gate Resistance

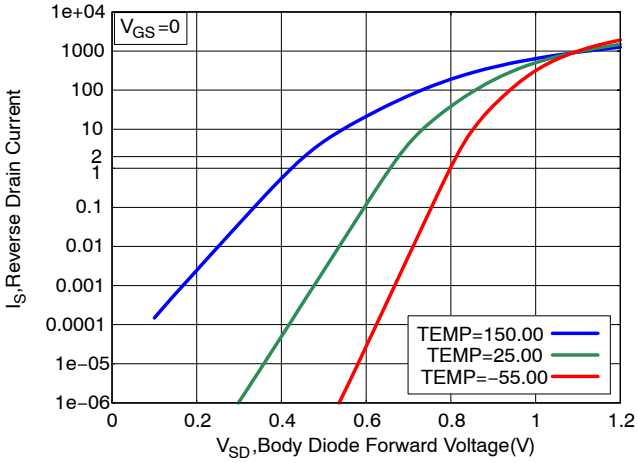

Figure 9. Diode Forward Voltage vs. Current

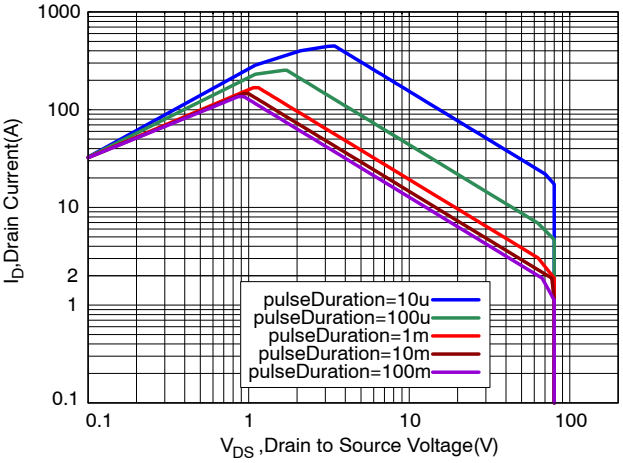

Figure 10. Maximum Rated Forward Biased Safe Operating Area

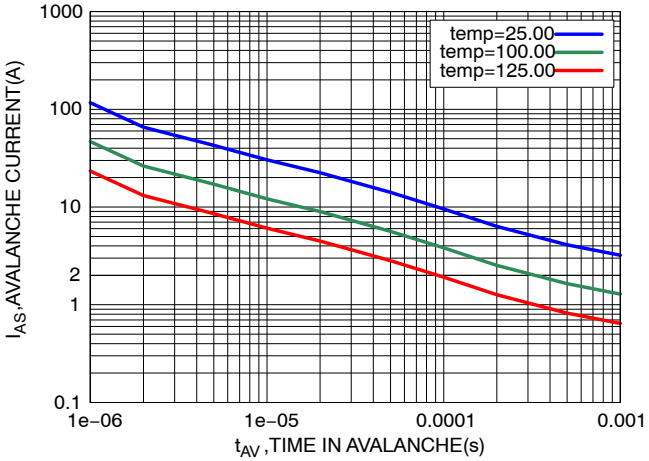

Figure 11. I_{PEAK} vs. Time in Avalanche

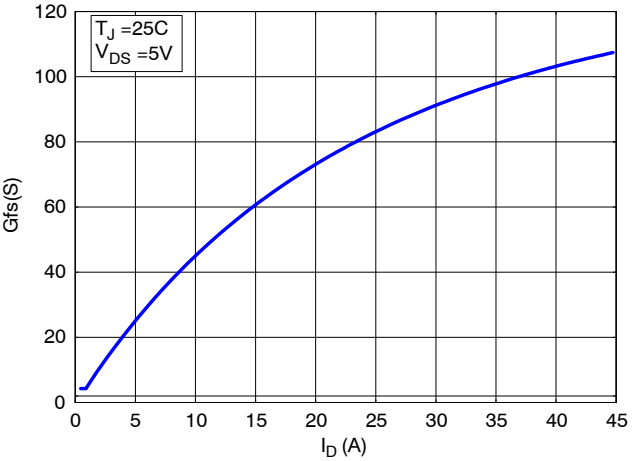

Figure 12. G_{FS} vs. I_D

TYPICAL CHARACTERISTICS

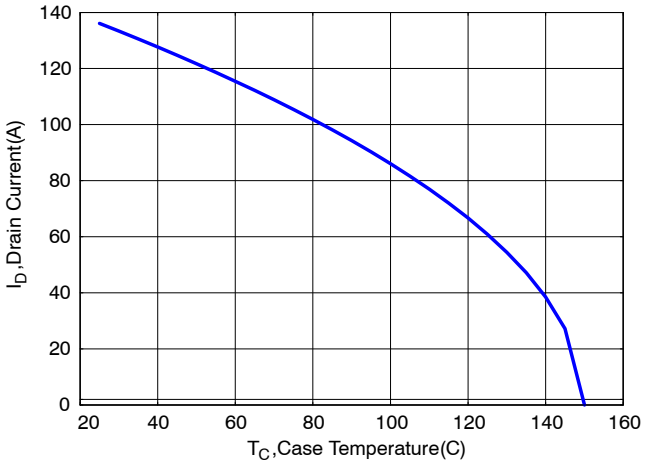

Figure 13. Maximum Current vs. Case Temperature

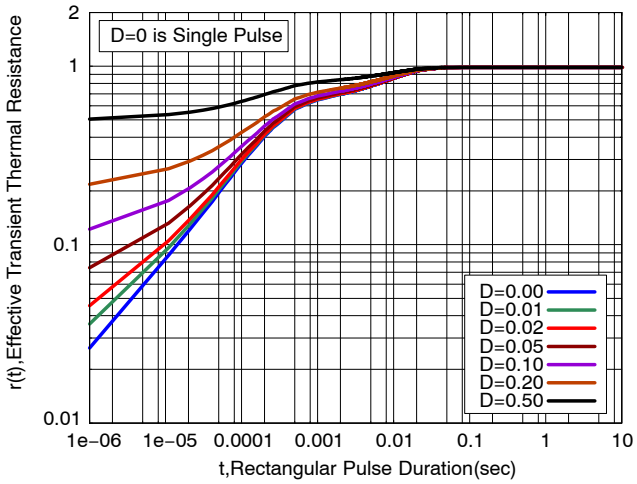

Figure 14. Thermal Response

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS

ON Semiconductor®

DFN8 5x6.15, 1.27P, DUAL COOL
CASE 506EG
ISSUE D

DATE 25 AUG 2020



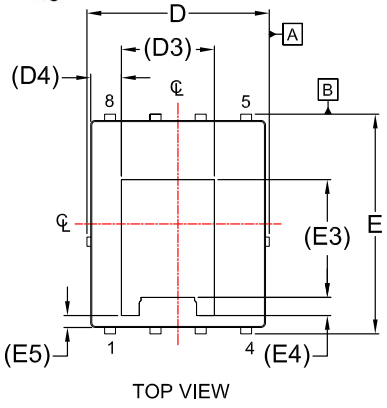

TOP VIEW



SIDE VIEW



DETAIL "A"
SCALE: 2:1

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. COPLANARITY APPLIES TO THE EXPOSED PADS AS WELL AS THE TERMINALS.
4. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
5. SEATING PLANE IS DEFINED BY THE TERMINALS. "A1" IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.



FRONT VIEW

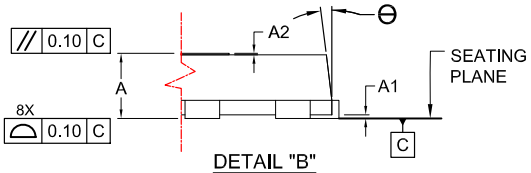

DETAIL "B"
SCALE: 2:1

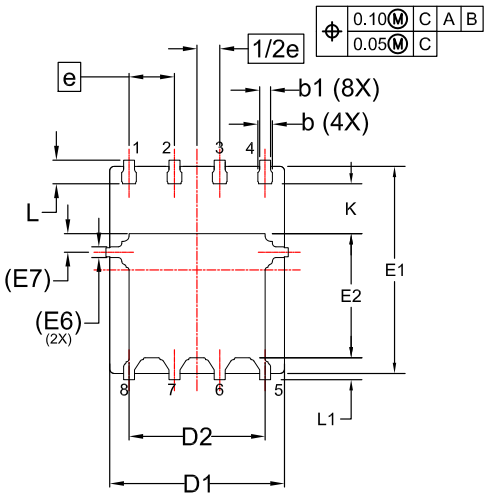

BOTTOM VIEW

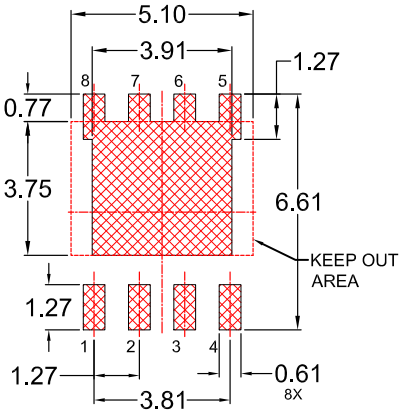

LAND PATTERN
RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.85	0.90	0.95
A1	-	-	0.05
A2	-	-	0.05
b	0.31	0.41	0.51
b1	0.21	0.31	0.41
c	0.20	0.25	0.30
D	4.90	5.00	5.10
D1	4.80	4.90	5.00
D2	3.67	3.82	3.97
D3	2.60 REF		
D4	0.86 REF		
E	6.05	6.15	6.25
E1	5.70	5.80	5.90
E2	3.38	3.48	3.58
E3	3.30 REF		
E4	0.50 REF		
E5	0.34 REF		
E6	0.30 REF		
E7	0.52 REF		
e	1.27 BSC		
1/2e	0.635 BSC		
K	1.30	1.40	1.50
L	0.56	0.66	0.76
L1	0.52	0.62	0.72
Θ	0°	---	12°

GENERIC MARKING DIAGRAM*



XXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON84257G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**DFN8 5x6.15, 1.27P, DUAL COOL**	**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales