




【도 1】

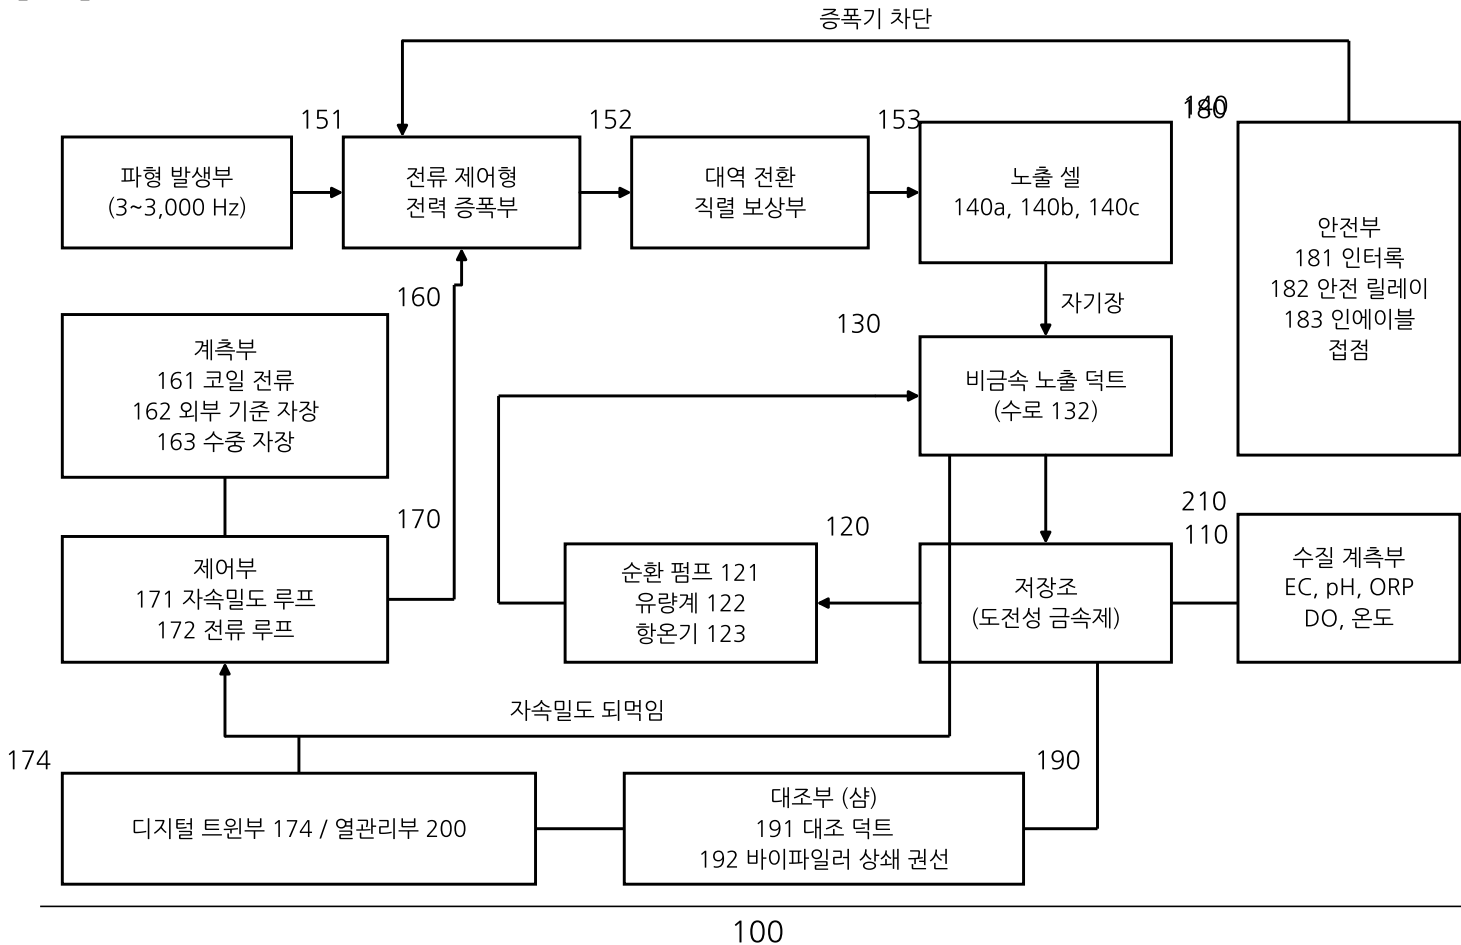


【図 2】

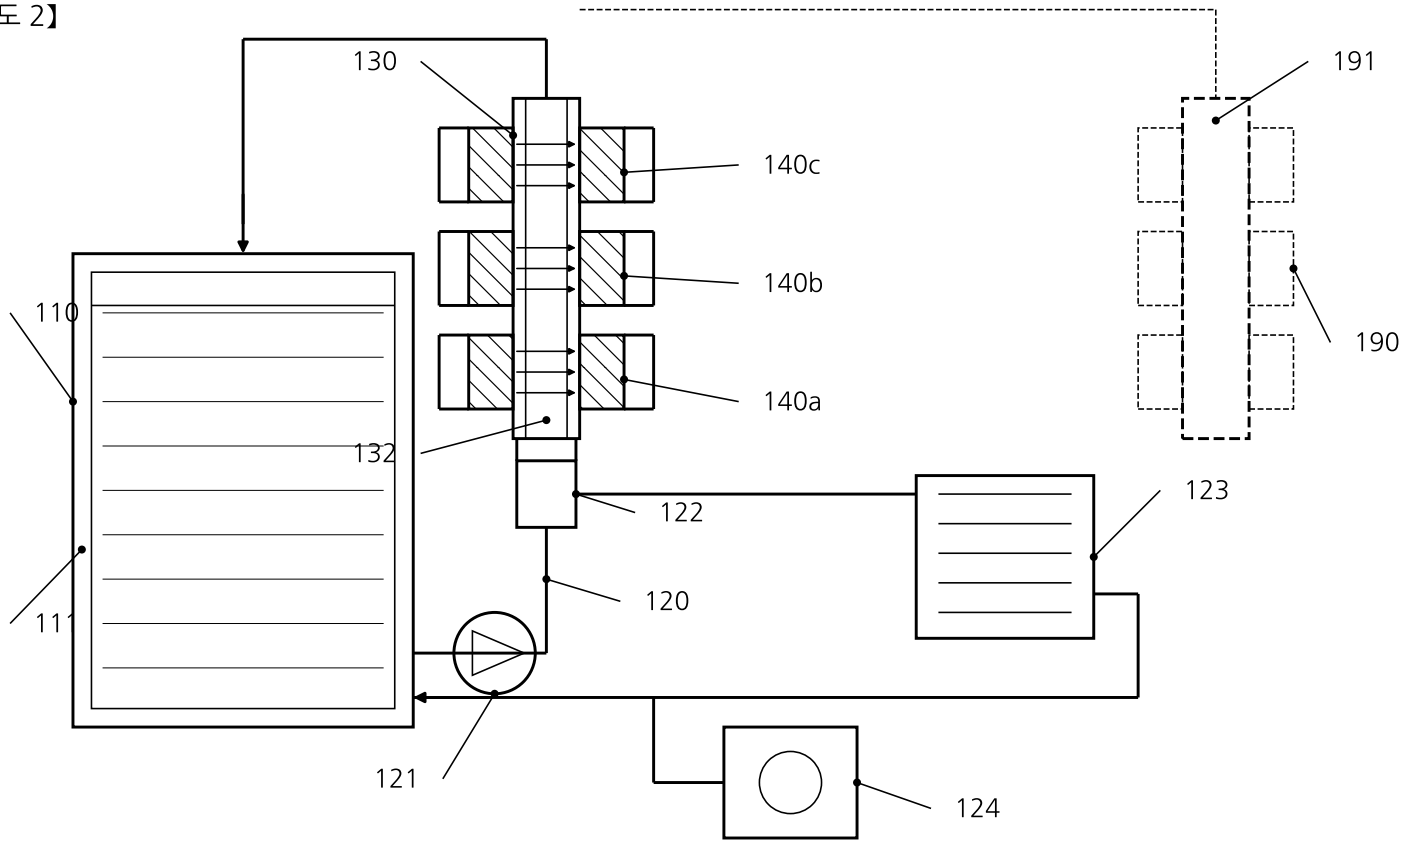



【도 3】

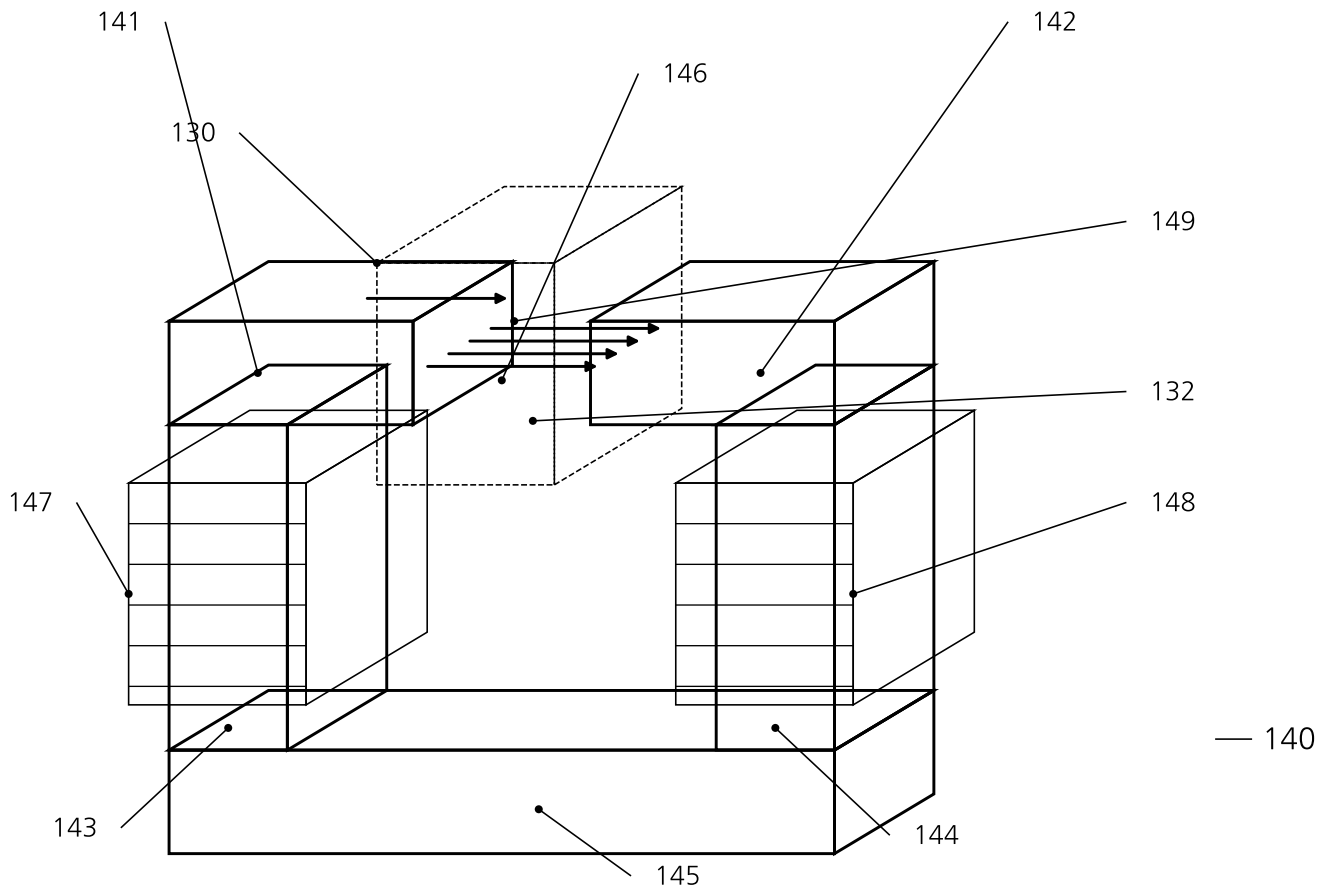

【도 4】

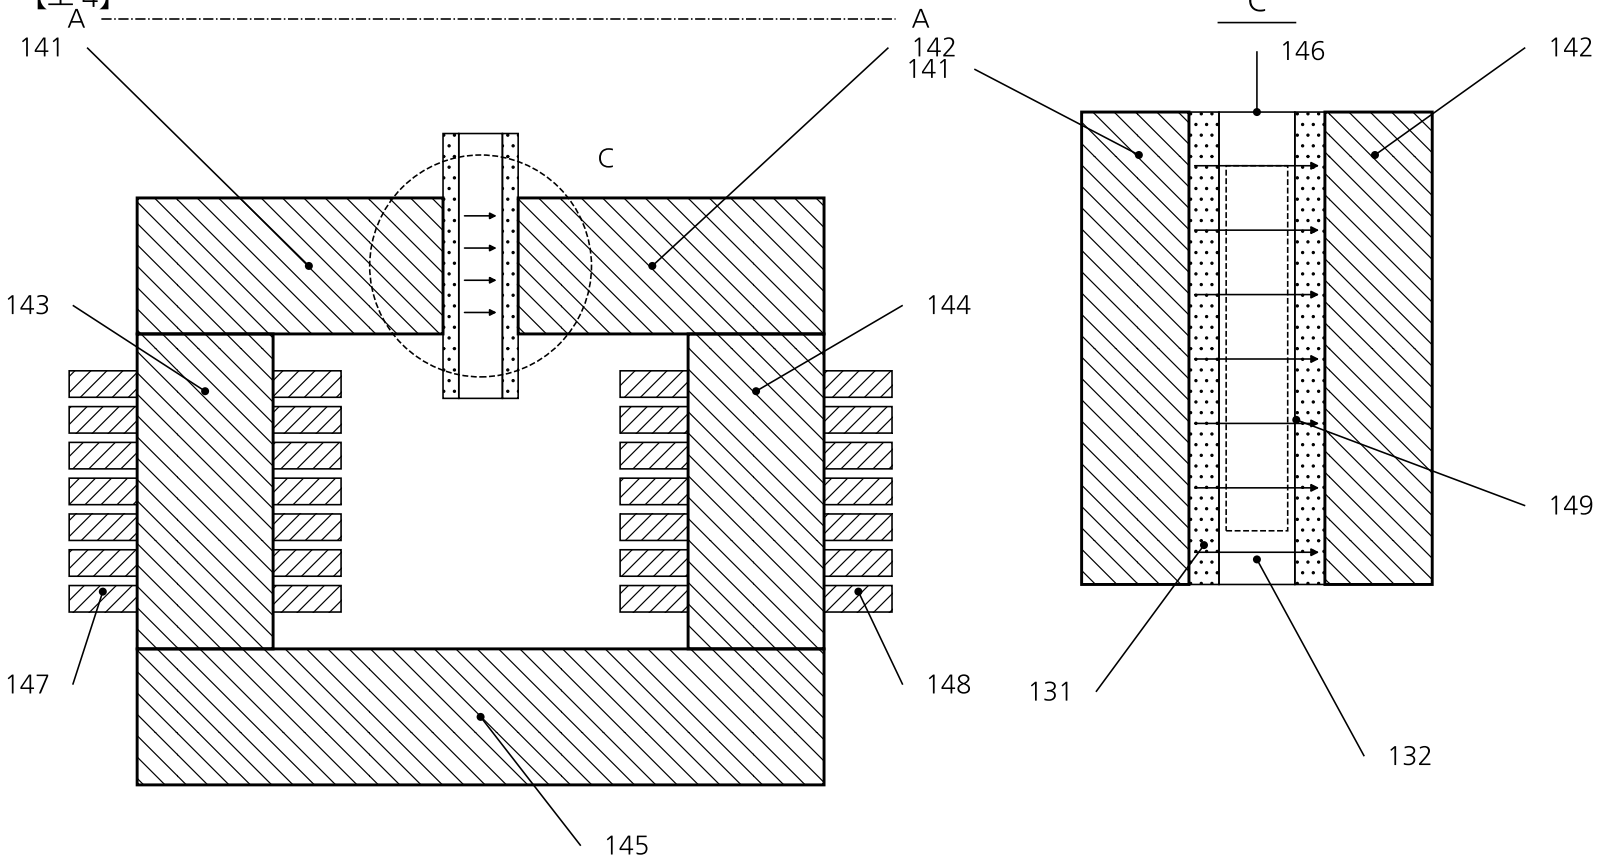

【도 5】

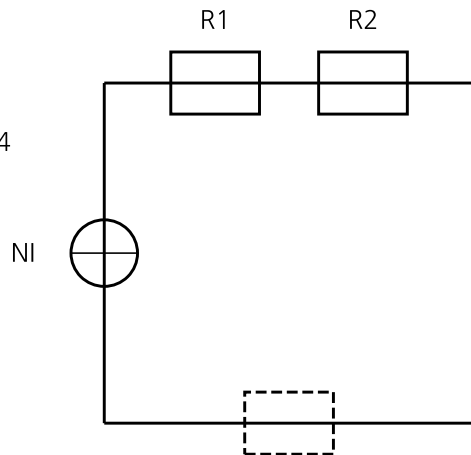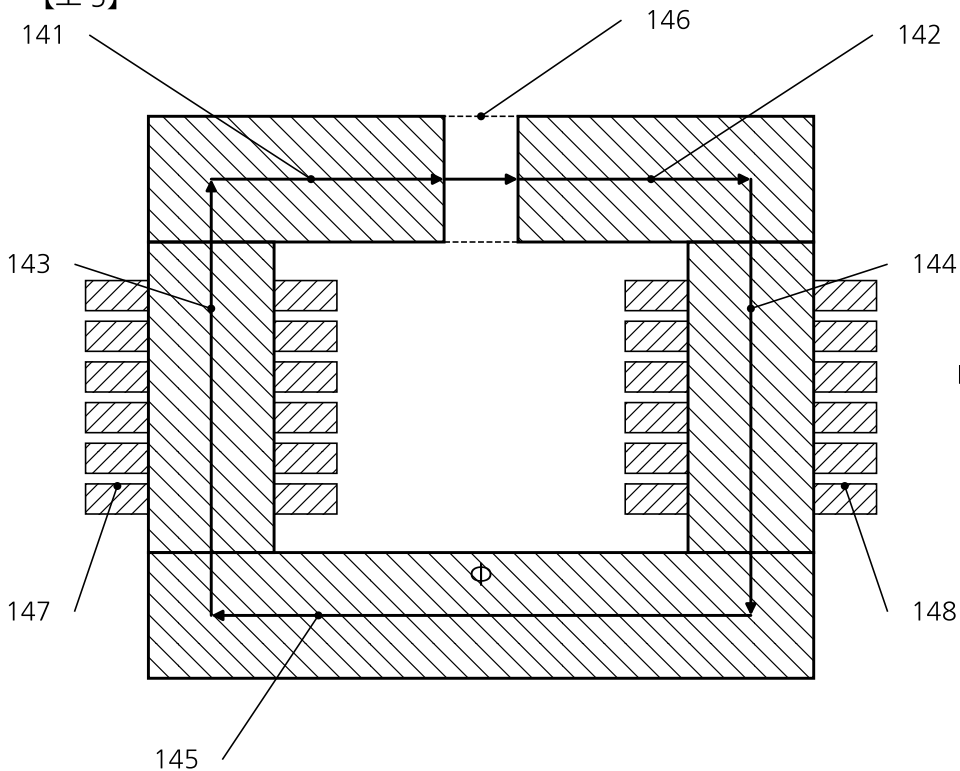


R1 : 공극 자기저항

R2 : 자심 자기저항



R3 : 누설 자기저항

【도 6】

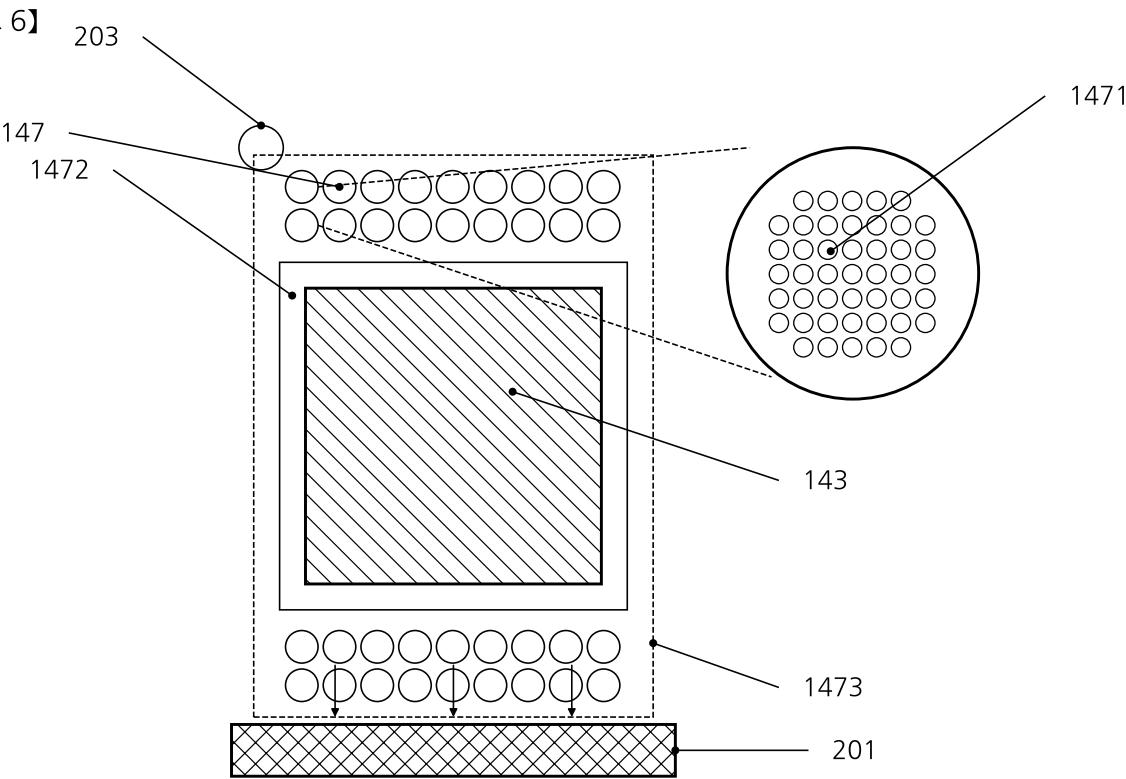


【도 7】


N1 : 자속 반전에 의한 자속밀도 영점

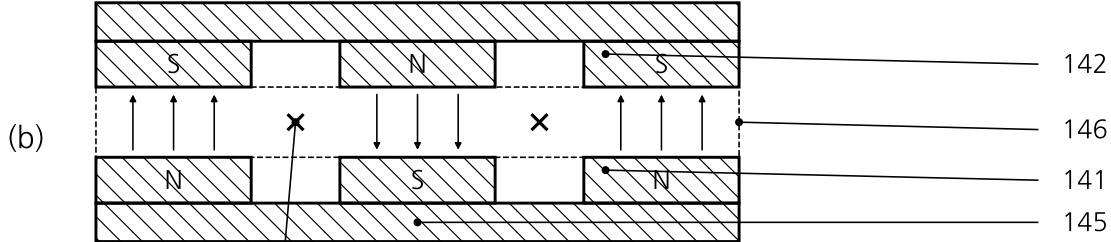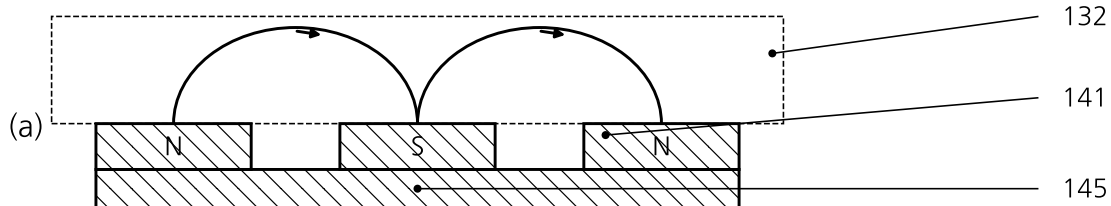


N1

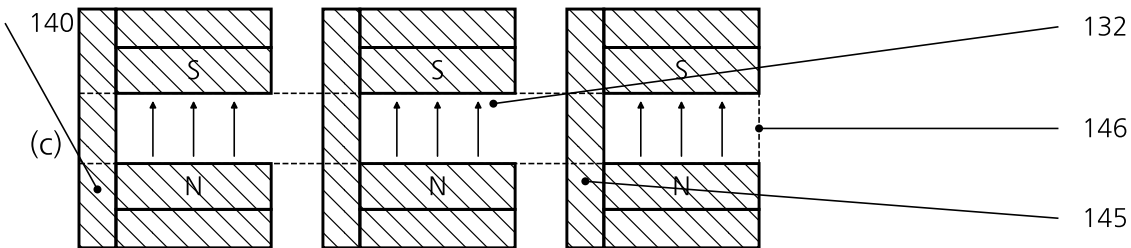

【도 8】

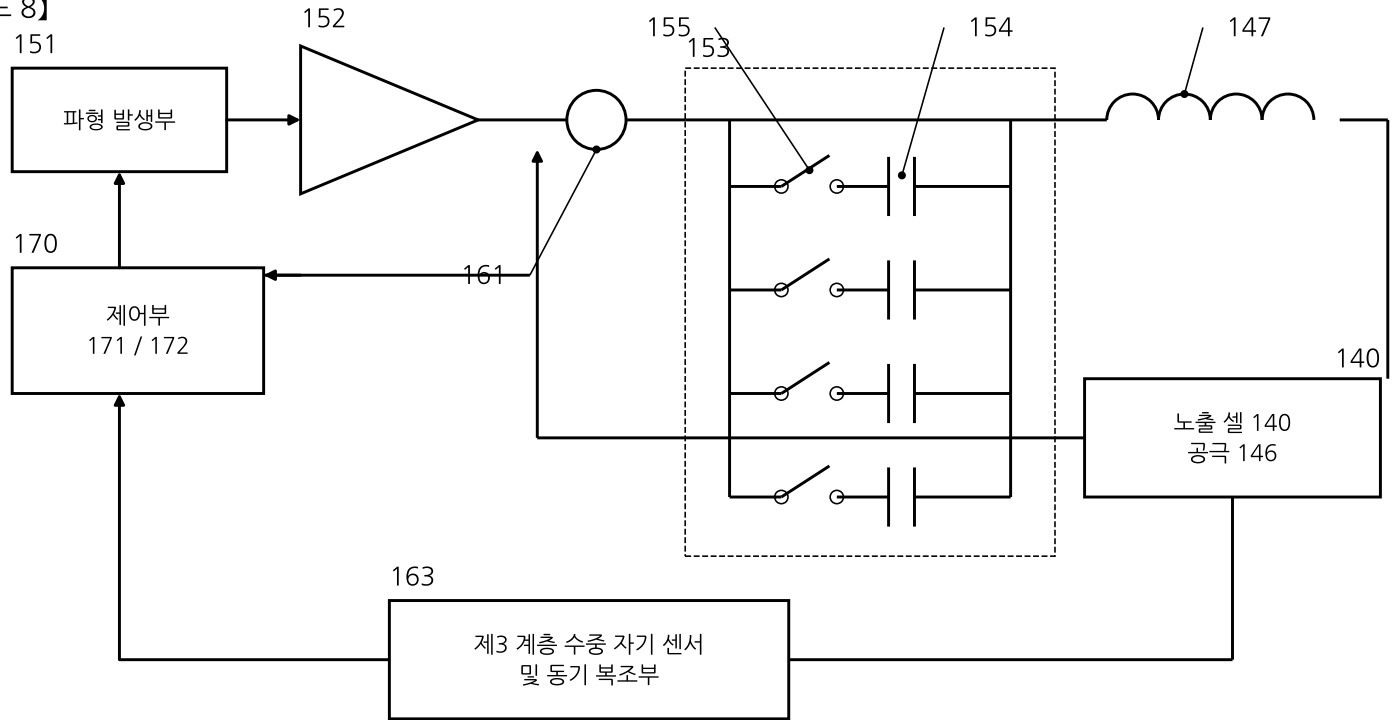


【도 9】

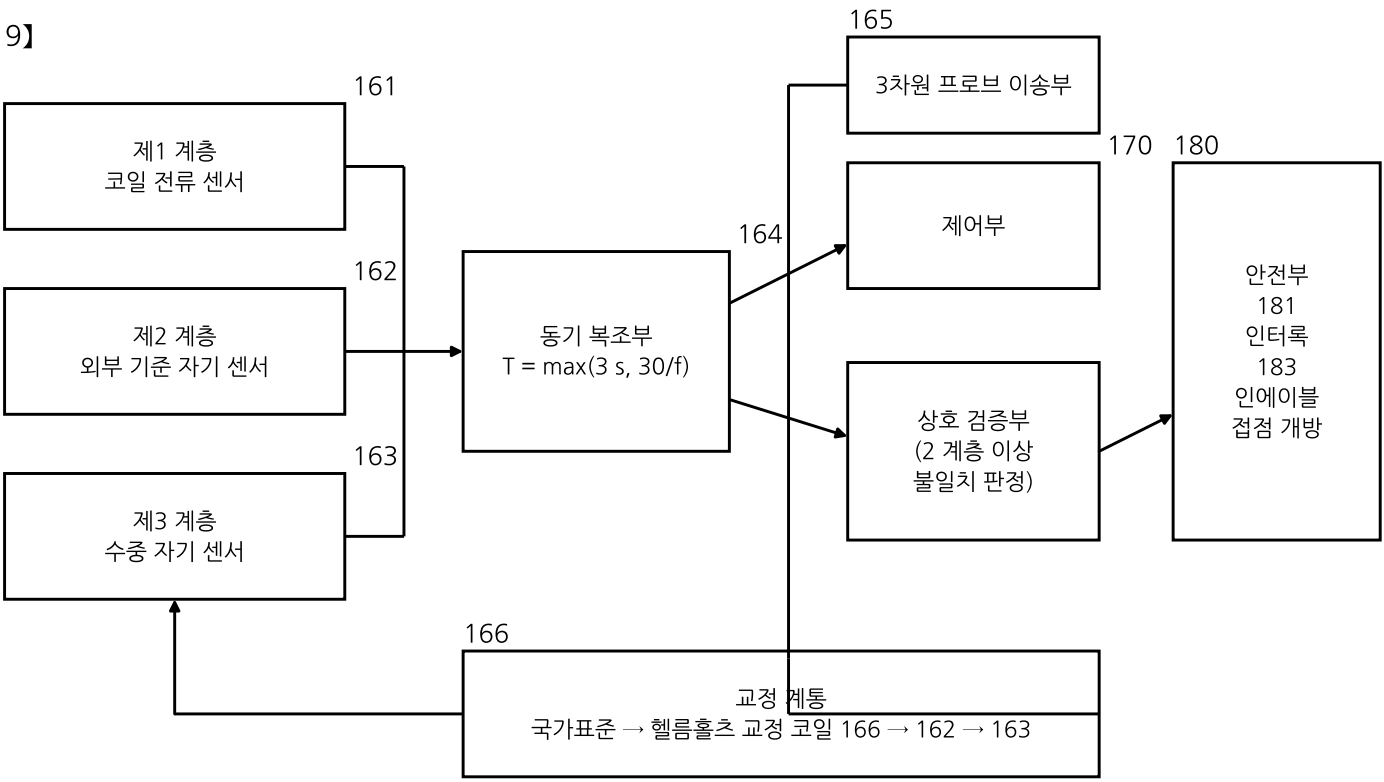


【도 10】


(a)

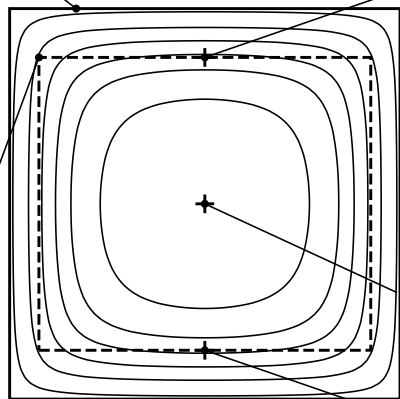


(b)

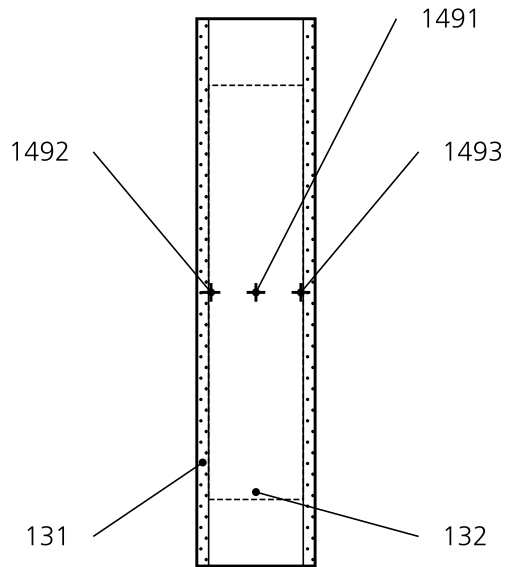


【도 11】

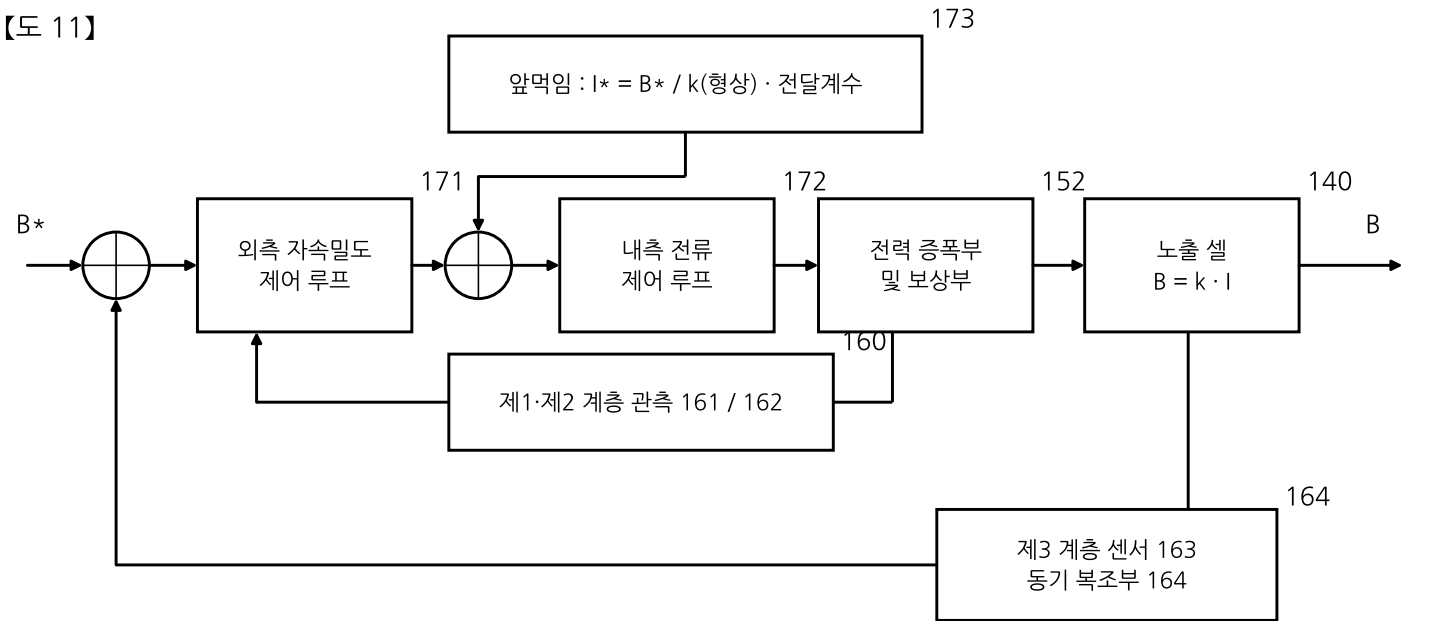

【도 12】

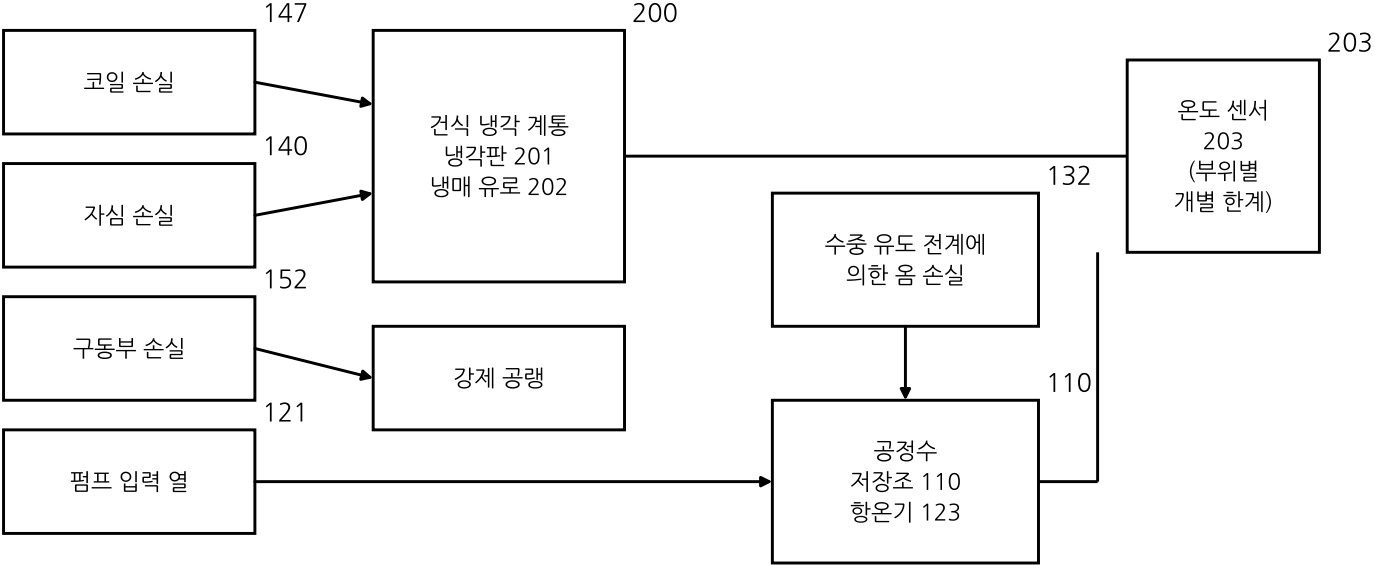

【도 13】

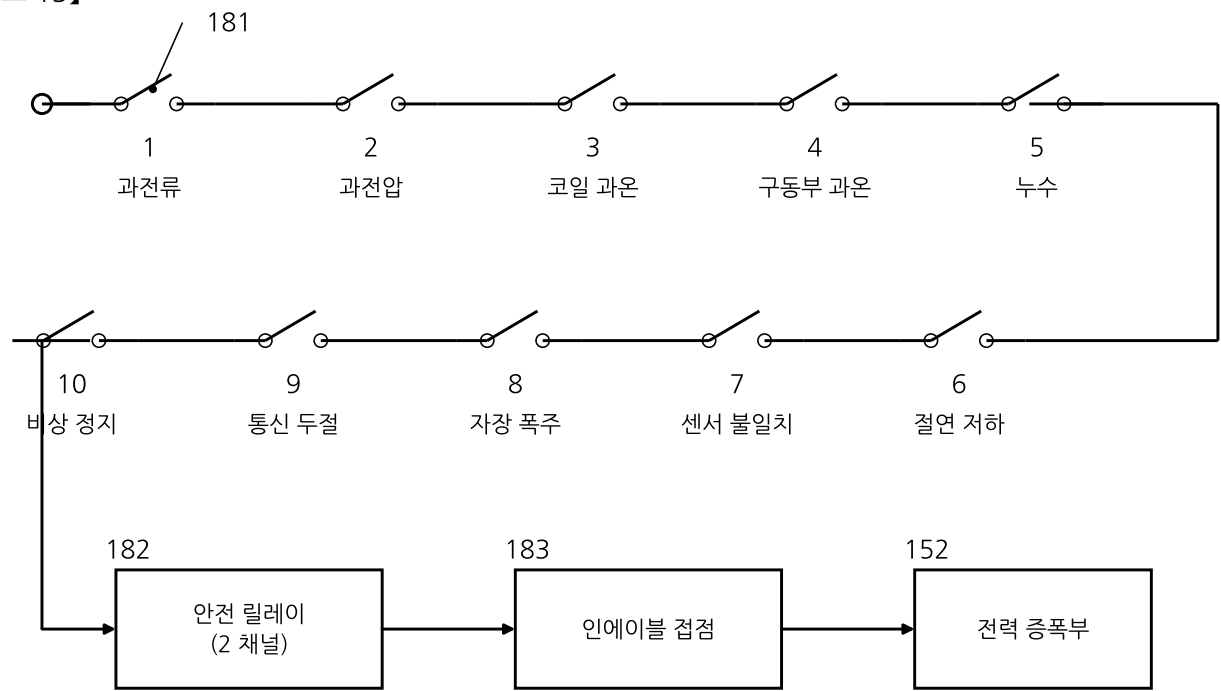

제어 소프트웨어 경보는 통보 전용이며, 어떠한 소프트웨어 경로도 인에이블 접점을 유지시킬 수 없다. 무전압 시 차단되는 구조이다.

【도 14】


실험군

140




대조군 (삼)


190

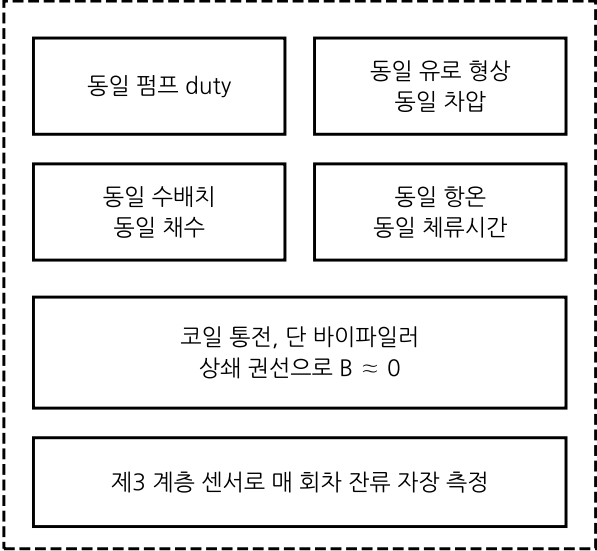


【도 15】

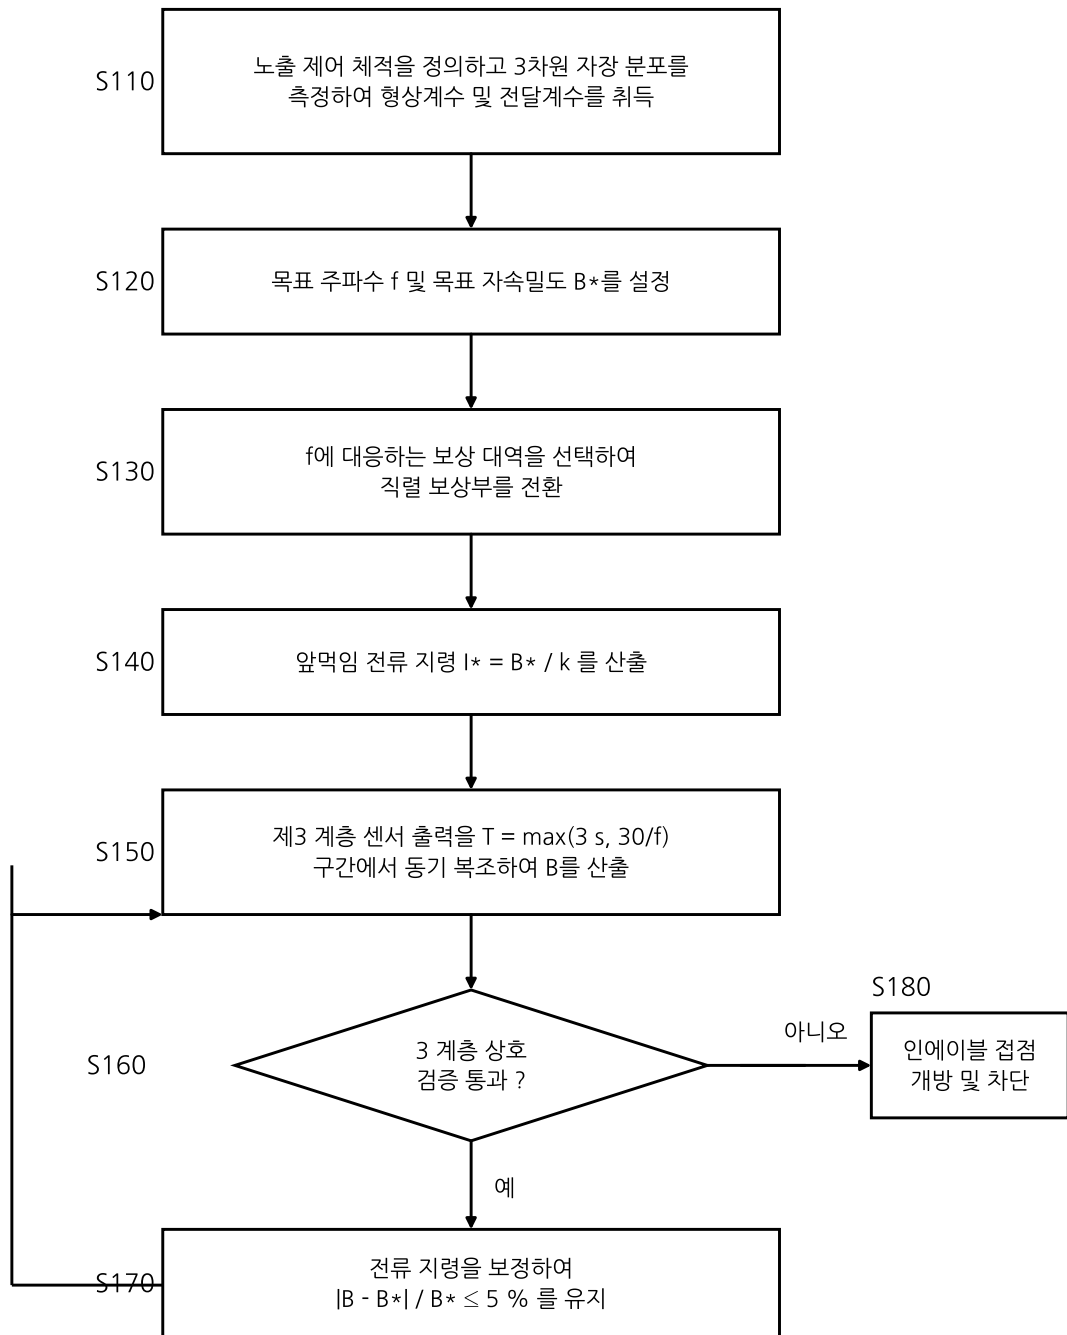


【도 16】

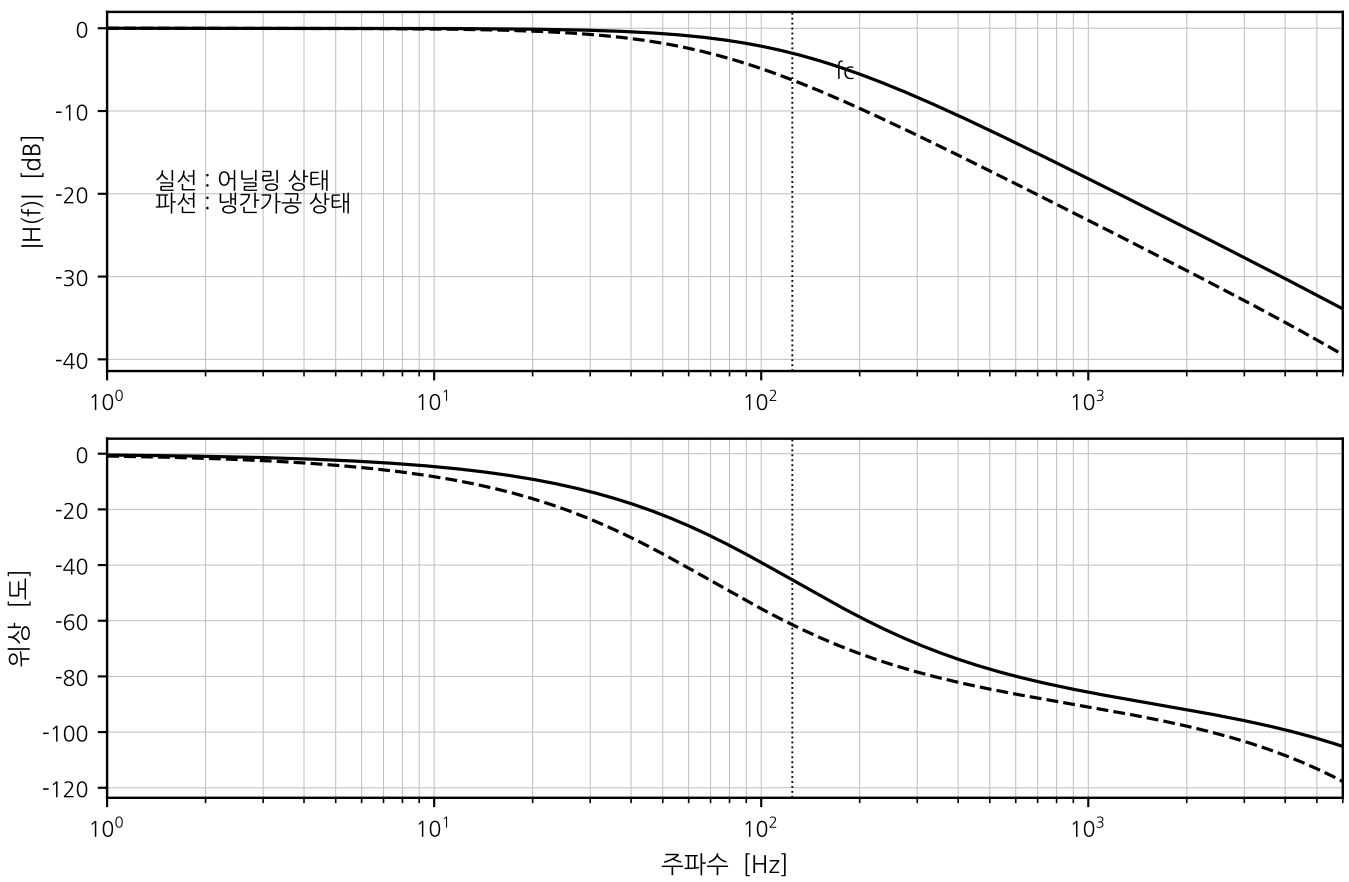

【도 17】

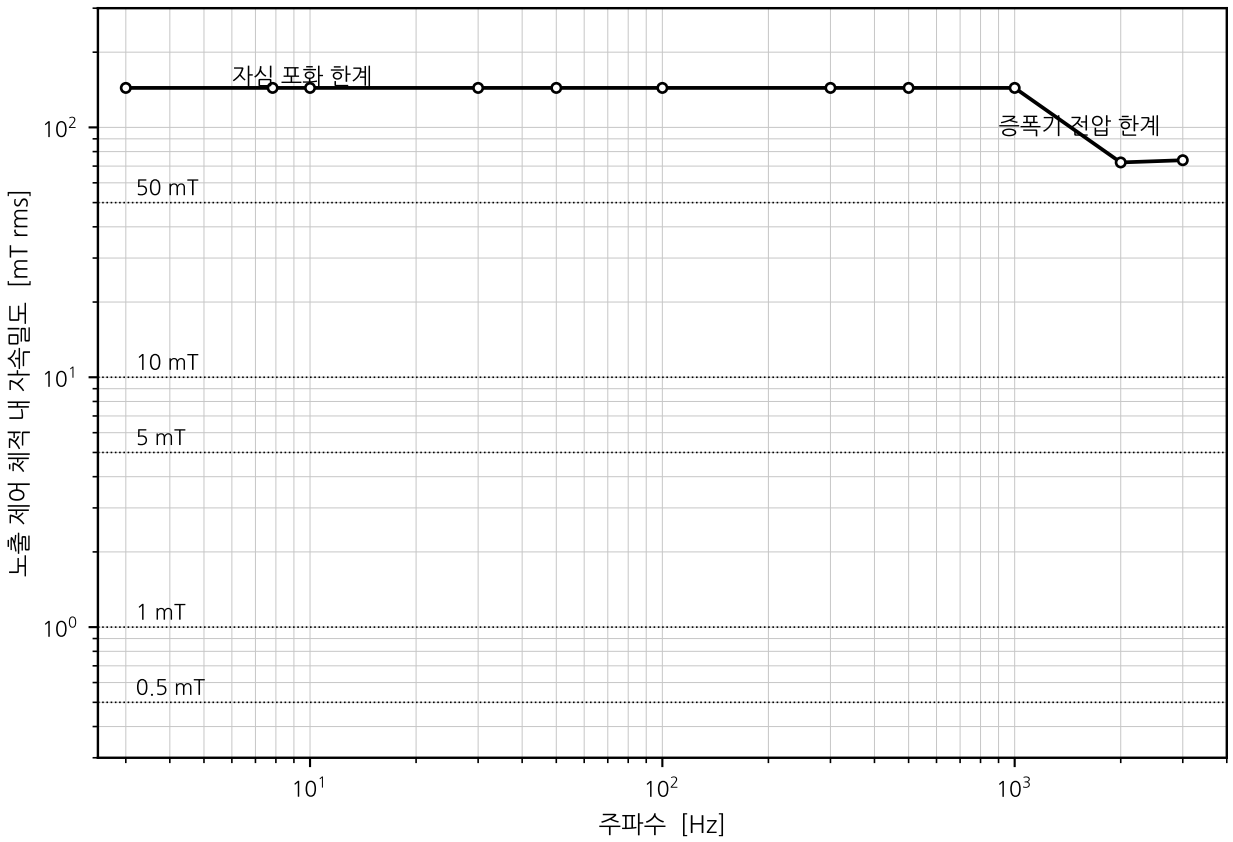

【도 18】

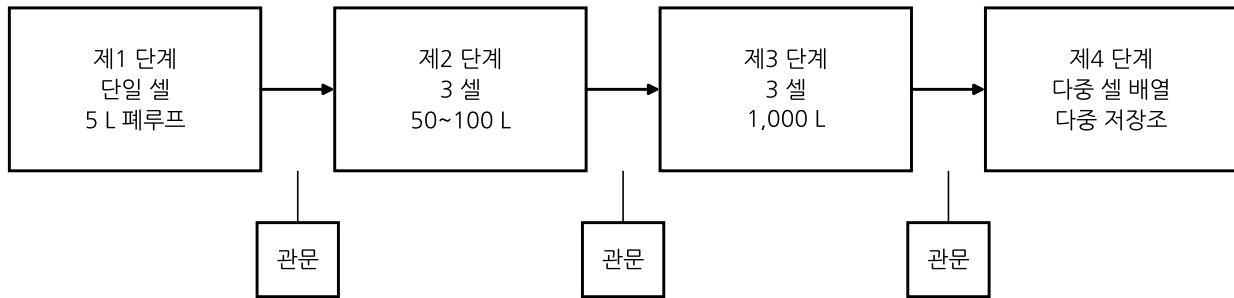

각 관문에서 검증 항목 전 항 통과 및 노출 제어 체적 대 처리 체적비의 재산출을 요구한다.