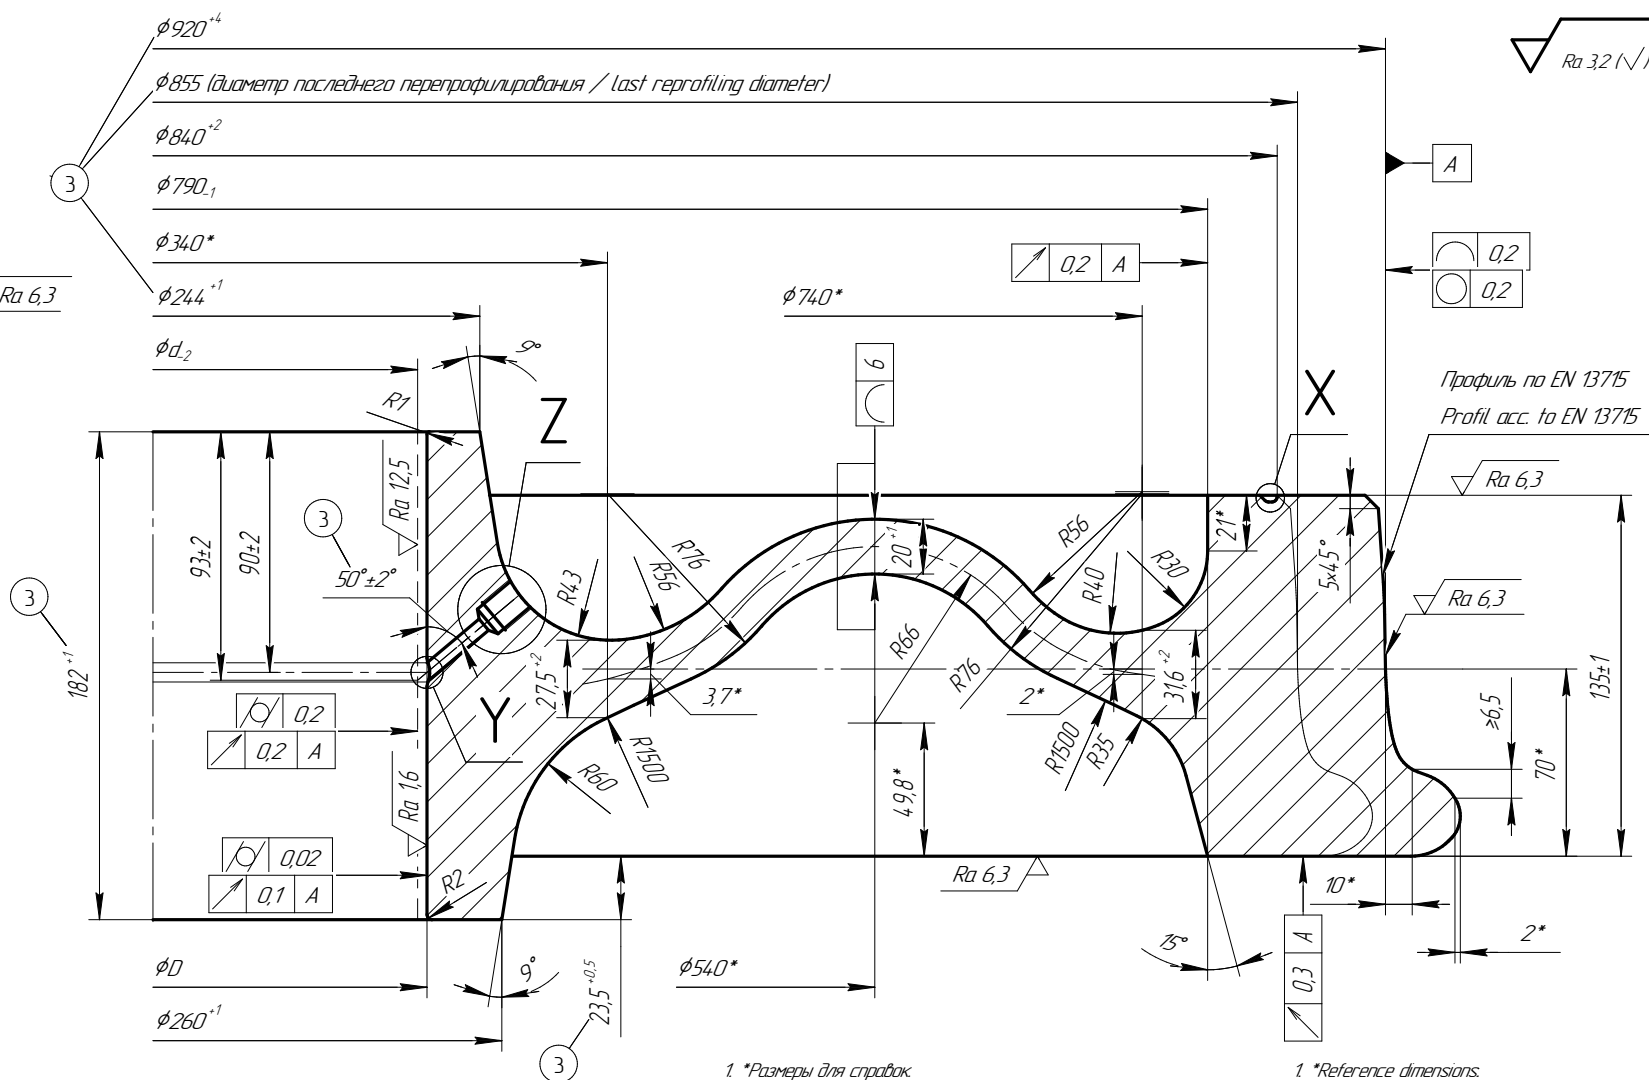
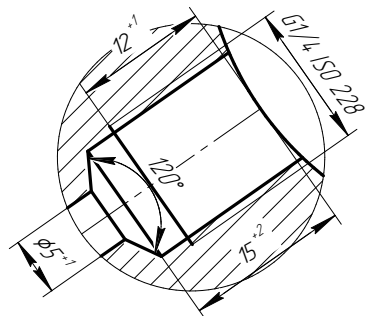



$Z(2:1)$ 

1. \*Reference dimensions.
2. Sharp edges should be blunt.
3. Non-standard limited tolerances as per ISO 2768-mK.
4. Residual imbalance value is no more than 125 gm.
5. Anticorrosive coating is in accordance with the requirements of the customer.
6. Axle load – 25 t.

KP-0050-16			
	<i>Machined wheels</i> <i>UL T 25</i>		
	<i>Лит</i>	<i>Мака</i>	<i>Макумаб</i>
		<i>от мабл</i>	<i>1:2</i>
<i>Сталь ER7 по EN 13262</i> <i>Steel ER7 acc. to EN 13262</i>		<i>Лит</i>	<i>Литмаб 1</i>
		<i>PJSC "INTERPIPE NTRP"</i> <i>Dnipro</i>	

Формат А3