LG NeON®2 BiFacial



72

LG410N2T-J5

410W

The LG NeON® 2 BiFacial is designed to absorb sunlight both from the front and the rear sides of its NeON® cell by using a transparent backsheet. The dual faces of the cell result in higher energy generation.

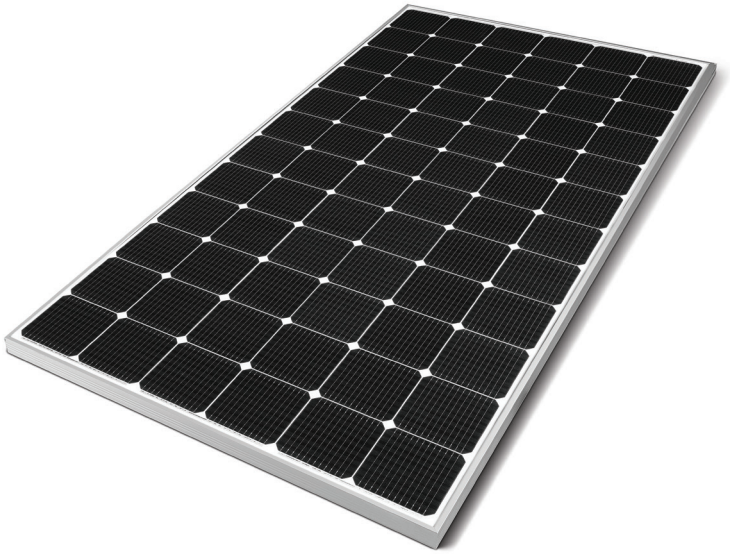

Features

Enhanced Product Warranty

LG provides the product warranty of the LG NeON® 2 BiFacial to an industry-leading 25 years.

Bifacial Energy Yield

LG NeON® 2 BiFacial modules use highly efficient bifacial solar cell, "NeON" applied Cello technology. Through the Cello technology, LG NeON® 2 BiFacial can achieve up to 30% more energy than standard PV module.

Better Performance on a Sunny Day

LG NeON® 2 BiFacial now performs better on sunny days, thanks to its improved temperature coefficient.

More Generation on a Cloudy Day

The LG NeON® 2 BiFacial performs well on cloudy days; weak sunlight conditions cause a low energy reduction.

When you go solar, ask for the brand you can trust: LG Solar

About LG Electronics

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX® series to the market, which is now available in 32 countries. The NeON® (previous MonoX® NeON), NeON®2, NeON®2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.

LG Life's Good

LG NeON®2 BiFacial

LG410N2T-J5

General Data

Cell Properties (Material/Type)	Monocrystalline/N-type
Cell Maker	LG
Cell Configuration	72 Cells (6 x 12)
Number of Busbars	12EA
Module Dimensions (L x W x H)	2,024mm x 1,024mm x 40 mm
Weight	20.3 kg
Glass (Thickness/Material)	2.8mm/Tempered Glass with AR Coating
Backsheet (Color)	Transparent
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,200mm x 2EA
Connector (Type/Maker)	MC 4/MC

Temperature Characteristics

NMOT*	[°C]	42 ± 3
Pmax	[%/°C]	-0.36
Voc	[%/°C]	-0.26
Isc	[%/°C]	0.03

*NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², Ambient temperature 20°C, Wind speed 1 m/s, Spectrum AM 1.5

Electrical Properties

Model		LG410N2T-J5		
		STC*	BiFi100**	BiFi200**
Maximum Power (Pmax)	[W]	410	435	460
MPP Voltage (Vmpp)	[V]	42.3	42.3	42.3
MPP Current (Impp)	[A]	9.71	10.28	10.87
Open Circuit Voltage (Voc)	[V]	49.9	49.9	49.9
Short Circuit Current (Isc)	[A]	10.30	10.91	11.55
Module Efficiency	[%]	19.8	21.0	22.2
Pmax Bifaciality Coefficient	[%]	70 ± 5		
Power Tolerance	[%]	0 ~ +3		

*STC (Standard Test Condition): Irradiance 1000W/m², Cell temperature 25°C, AM 1.5, Measure Tolerance: ±3%
**The electrical properties of BiFi100 and BiFi200 measure under the front side irradiance 1000W/m² + (100W/m² or 200W/m²)* BiFi. Use 100W/m² for BiFi100 and 200W/m² for BiFi200.
2) IEC/ UL Certifications is scheduled to proceed.

Electrical Properties (NMOT)

Model		LG410N2T-J5		
		STC	BiFi100	BiFi200
Maximum Power (Pmax)	[W]	308	326	345
MPP Voltage (Vmpp)	[V]	39.8	39.8	39.8
MPP Current (Impp)	[A]	7.74	8.20	8.67
Open Circuit Voltage (Voc)	[V]	47.1	47.1	47.1
Short Circuit Current (Isc)	[A]	8.28	8.77	9.28

I-V Curves

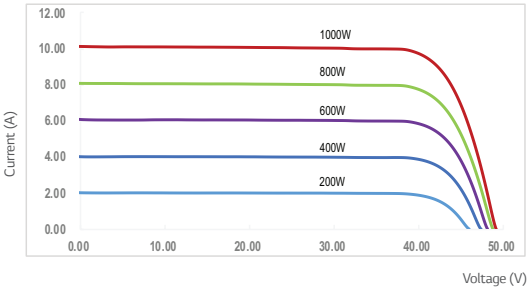

Certifications and Warranty

Certifications	IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016, UL 1703
	ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6
Ammonia Corrosion Test	IEC 62716:2013
Module Fire Performance	Type 1 (UL 1703)
Fire Rating	Class C (UL 790)
Solar Module Product Warranty	25 Years
Solar Module Output Warranty	Linear Warranty*

*Improved: 1st year 104.4%, from 2-24th year: 0.35%/year down, at 25th year: 95.9%

Operating Conditions

Operating Temperature	[°C]	-40 ~+90
Maximum System Voltage	[V]	1,000(IEC)/1500(UL)
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load (Front)	[Pa/psf]	5,400/113
Mechanical Test Load (Rear)	[Pa/psf]	3,000/63

*Test Load = Design Load x Safety Factor (1.5)

Packaging Configuration

Number of Modules per Pallet	[EA]	25
Number of Modules per 40ft HQ Container	[EA]	550
Packaging Box Dimensions (L x W x H)	[mm]	2,080 x 1,120 x 1,226
Packaging Box Gross Weight	[kg]	551

Dimensions (mm/inch)

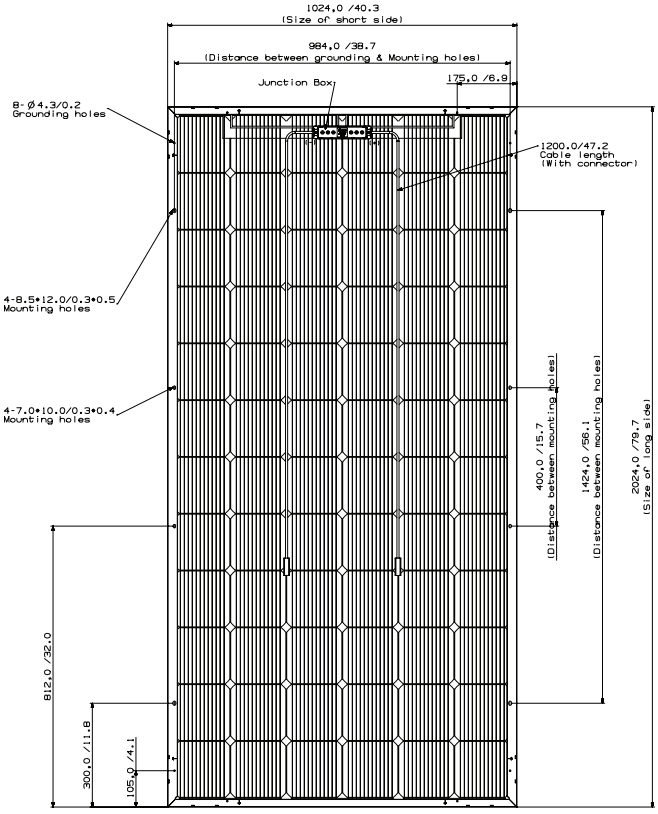

LG Electronics, Inc.
Solar Business Division
2000 Millbrook Drive
Lincolnshire, IL 60069

www.lg-solar.com

Life's Good

Product specifications are subject to change without notice.
LG410N2T-J5.pdf