


LabOSP

Cable Joint Box

Outside Plant Cable Access Utilities

Designed for Fiber Optic and others communication cables

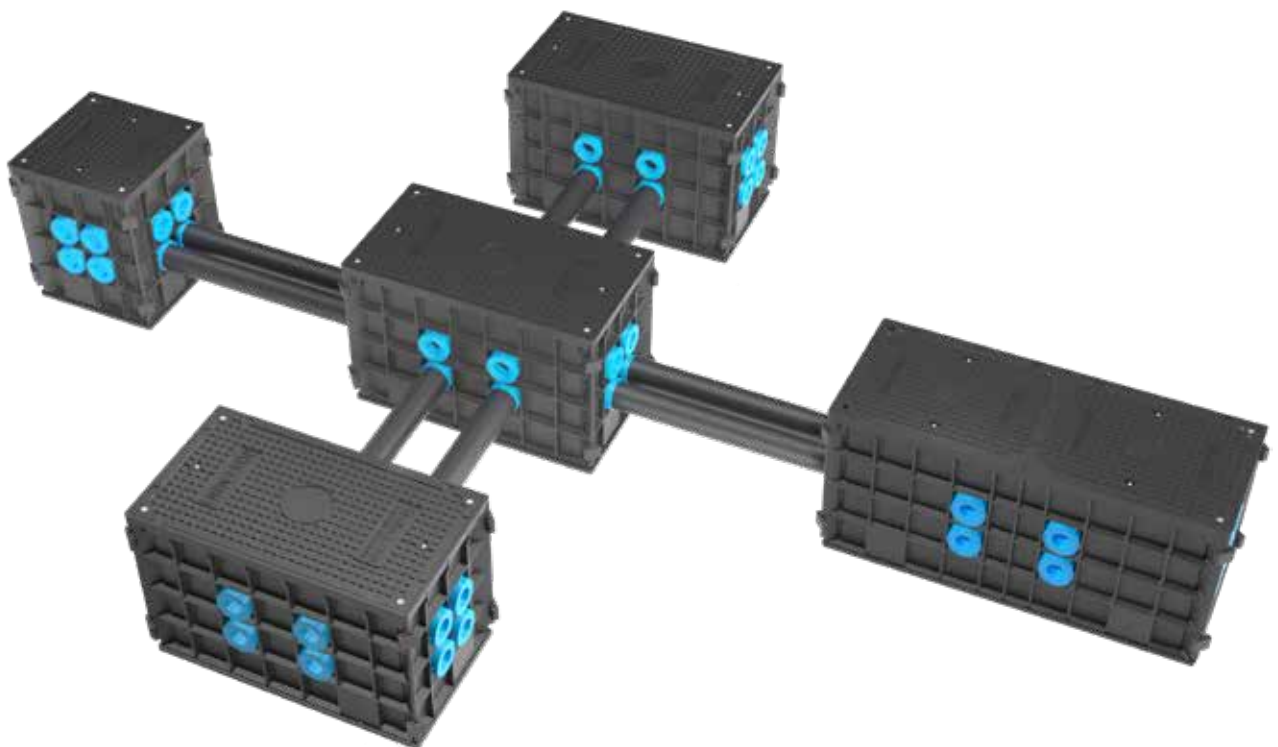

1978 - 2017
IN LOVING MEMORY OF TLM



SMC (Sheet Molding Compound)

SMC (Sheet Moulding Compound) is a glass fibre reinforced compound, in a thermoset resin matrix, with mineral fillers and different additives. Generally thermoset unsaturated polyester or vinyl-ester resins are used as organic matrix.

With the aim of enhancing its characteristics and improve its transformation, other components are added: catalysts, inhibitors, thermoplastic additives, demoulding agents, thickeners and pigments.

SMC is used in hot press compression moulding for the production of large parts with high mechanical properties and excellent surface finish.

Benefits of SMC (Sheet Molding Compound)

- Low weight compared to steel, iron making installation faster and cheaper
- Range of UV stable colors available that will not flake or crack
- High dimensional accuracy from very low to very high temperatures
- Flame retardant and low smoke systems
- Highly resistant to weathering, water and humidity
- Excellent mechanical and physical properties
- Excellent electrical insulation and creep resistance
- Excellent sound dampening qualities
- Tough and durable. Resistant to vandalism .
- Resistant to corrosion and corrosive environments
- Eliminates risk of theft due to no resale value
- Design freedom (complex geometries and integration of parts and functions)

Specification of SMC (Sheet Molding Compound)

PROPERTY	STANDARD	UNITY	VALUE
Glass Fiber Content	EN ISO 1172	%	18.5
Molding temperature	M		135-150
Molding Pressure	M	Bar	80-100
Desnsity	ISO 1183	g/cm³	1.8
Shrinkage	ISO 2577		0.1
Young's modulus	EN ISO 527-4	Gpa	
Tensile Strength	EN ISO 527-4	Mpa	60
Flexural strength	EN ISO 14125	Mpa	149
Flexural E-Modulus	EN ISO 14125	Gpa	10500
Impact Strength (charpy)	EN ISO 179	kJ/m²	58
Water Absorption	ISO 62		
Surface resistivity	IEC 60093	Ohm	10 ¹²
Poisson's ratio	ISO 527	-	
Oxygen Index	EN ISO 4589-2	%	
Heat Distortion Temperature	IEC 60695-2-12		
Fire-proof level	UI94	Level	

The value will depend on the specific formulation



1978 - 2017
IN LOVING MEMORY OF TLM



Overview

LabOSP SMC products are adaptable to your needs. All our formulations are designed according to your specific requirements.

KEY PROPERTY	MARKET				TARGET
	A&T	E&E	B&C	SAO	
Abrasion			✓	✓	Formulations with enhanced abrasion resistance
Acoustic	✓		✓	✓	Applications requiring better acoustic damping properties
Antistatic				✓	Formulations that prevent the growth of new bacteria and eliminate existing bacteria
Arc Resistance		✓			Conductive materials with antistatic properties for explosion proof parts
Carbon Resistance		✓			Applications requiring arc resistance
Carbon Fiber	✓				Material with chopped carbon fibers for light weight structural parts with high mechanical properties
Chemical	✓	✓	✓	✓	Formulations with increased resistance to most chemical agents
Class A	✓				Excellent surface quality for painted body panels
Dielectric		✓			Materials with specific dielectrical properties
Finish			✓	✓	Special appearance effects: granite, marble, stone, etc.
Flame Resistant		✓		✓	Formulations designed to meet your required flame retardancy. UL "Yellow Cards" available.
Flow	✓	✓	✓	✓	Better flow properties during the moulding process to fill intricate parts
Food Contact			✓	✓	Food contact applications
High Temperature	✓	✓	✓	✓	High temperature stability for applications requiring high service temperature
Hydrophobe			✓	✓	Applications requiring and increased resistance to water absorption
Low Density	✓				Low density formulations to reduce weight of parts
Low Emission	✓				Formulations with low emission of volatile organic components
Low Shrink	✓	✓	✓	✓	Parts requiring precise tolerances for mounting of various components
Low profile	✓				Parts requiring very precise tolerances for mounting of various components
Low Pressure	✓		✓	✓	Applications requiring moulding at low press tonnage
Low Smoke Emission	✓	✓	✓		Formulations designed to meet low smoke emission requirements
Paintable	✓	✓	✓	✓	Materials adapted to all painting processes
PIMC			✓	✓	Materials adapted to powder In-Mould Coating Process
Reactive	✓	✓	✓	✓	High reactivity formulations to reduce curing time
Scratch Resistance			✓	✓	Formulations with an enhanced scratch resistance
Strength	✓	✓	✓	✓	Applications requiring high mechanical performance
Surface	✓	✓	✓	✓	Applications requiring excellent surface quality
Unidirectional	✓	✓	✓	✓	High strength materials with unidirectional reinforcement to strengthen especially the fiber direction
UV Stable	✓	✓	✓	✓	Formulations with an enhanced UV resistance

Application

SMC applications are widely used in the Automotive & Transportation, Electrical & Energy, Building & Construction, Industrial, Service, Sanitary, Domestic and Medical markets



1978 - 2017
IN LOVING MEMORY OF TLM






LabOSP Cable Joint Box 0

Size: 450 x 450 (mm)

- **Anti UV**
- **Light Weight**
- **High Durabilities**
- **Anti-Corrosive**
- **Fire Resistant**


Overview

LabOSP Cable Joint Box manhole system is designed for underground network access, especially for fiber optical and electricity industries. Manufactured with innovated composite material, making LabOSP Cable Joint Box system an ideal solution of strong, light, flexible, time & cost saving comparing to concrete manholes.

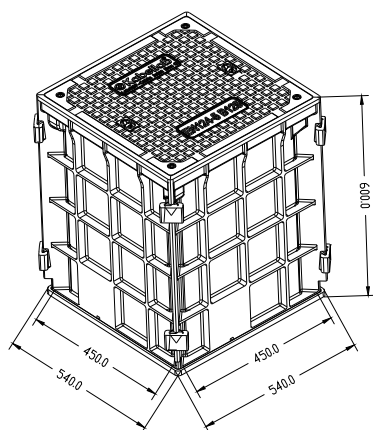

Specifications

CHAMBER MODEL		Standard Model	Extended Model
Internal Size (mm)	Internal Length	450	450
	Internal Width	450	450
External Size (mm)	Internal Length	540	540
	Internal Width	540	540
Weight (kg)	Chamber	23.2	36.4
	Base	2.5	2.5
Height (mm)		600	900

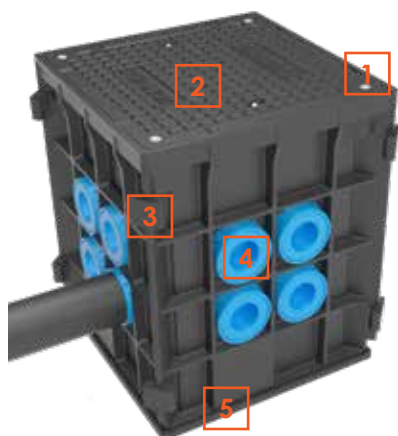

1 Locking System

Thief prevention

2 Access Box Cover

Options for B125 or D400

3 Fast-Clip connection kit

No Bolt or tool required, Knock and Lock

4 Duct Access Socket

Comptiable Duct Size 50mm & 110mm

5 Bottom Plate

- Base provide a clean finish
- Anti-slip and prevent vegetation

6 95% Time Saving

- Low Transport Cost
- Fast set up on site
- 90% Time Saving compare to concrete
- No heavy truck required





1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.

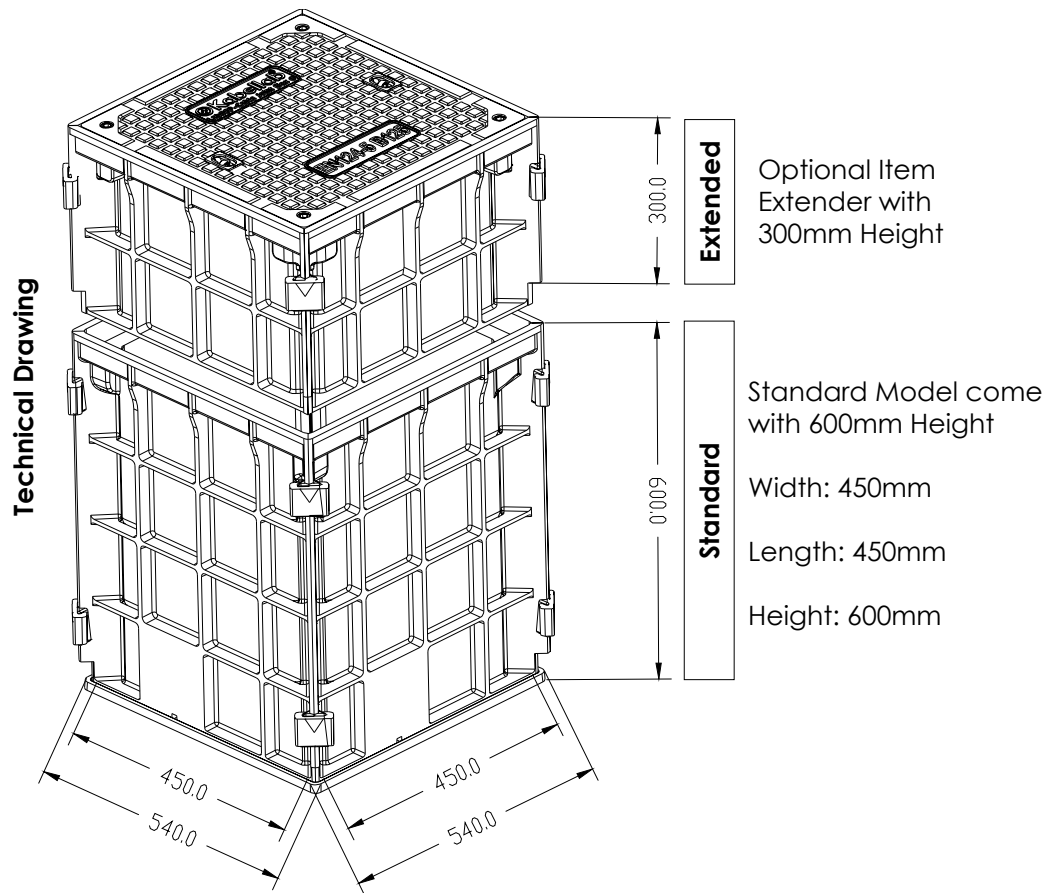

Cover Options Specifications

Cover	Size (mm)	Load Capacity	Weight (kg)	Application
EN124 - B125	510 x 510	12.5 Tonnes	13.4	Footpaths Grass Verges
EN124 - D400	510 x 510	40 Tonnes	20.5	Carriageway Traffic Lanes

Order Information

Part Number	Descriptions	Load Capacity	Applications
MH-LCJB0-STD	LabOSP Cable Joint Box 0 Width: 450, Length: 450, Height: 600 (mm) En124-B125 Cover	12.5T	Footpaths Grass Verges
MH-LCJB0-ETD	LabOSP Cable Joint Box 0 Width: 450, Length: 450, Height: 900 (mm) En124-B125 Cover	12.5T	Footpaths Grass Verges



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.




LabOSP Cable Joint Box 1

Size: 450 x 900 (mm)

- **Anti UV**
- **Light Weight**
- **High Durabilities**
- **Anti-Corrosive**
- **Fire Resistant**

Overview

LabOSP Cable Joint Box manhole system is designed for underground network access, especially for fiber optical and electricity industries. Manufactured with innovated composite material, making LabOSP Cable Joint Box system an ideal solution of strong, light, flexible, time & cost saving comparing to concrete manholes.

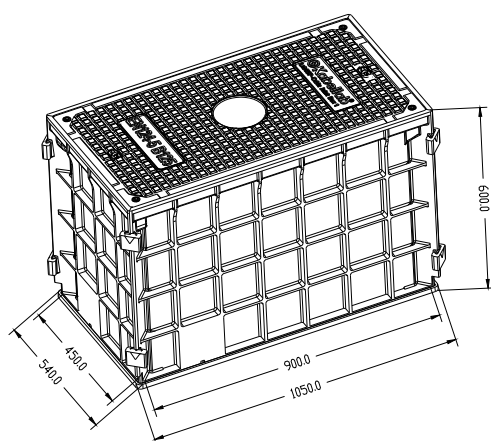

Specifications

CHAMBER MODEL		Standard Model	Extended Model
Internal Size (mm)	Internal Length	450	450
	Internal Width	900	900
External Size (mm)	Internal Length	540	540
	Internal Width	1050	1050
Weight (kg)	Chamber	33.6	52.8
	Base	5	5
Height (mm)		600	900



1 Locking System

Thief prevention

2 Access Box Cover

Options for B125 or D400

3 Fast-Clip connection kit

No Bolt or tool required, Knock and Lock

4 Duct Access Socket

Comptiable Duct Size 50mm & 110mm

5 Bottom Plate

- Base provide a clean finish
- Anti-slip and prevent vegetation

6 95% Time Saving

- Low Transport Cost
- Fast set up on site
- 90% Time Saving compare to concrete
- No heavy truck required





1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.

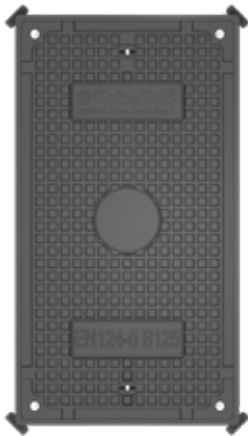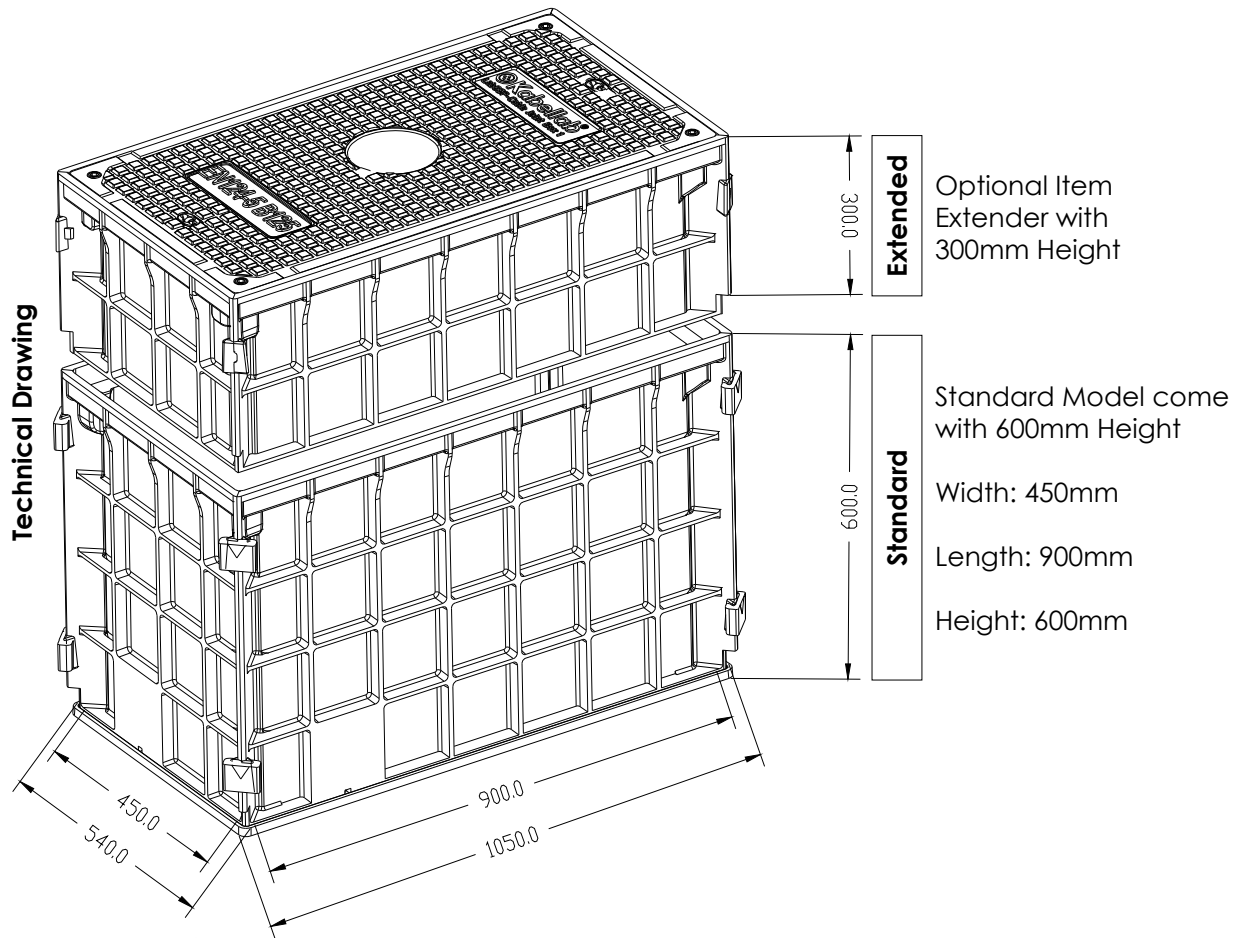

Cover Options Specifications

Cover	Size (mm)	Load Capacity	Weight (kg)	Application
EN124 - B125	510 x 1020	12.5 Tonnes	26.8	Footpaths Grass Verges
EN124 - D400	510 x 1020	40 Tonnes	41	Carriageway Traffic Lanes

Order Information

Part Number	Descriptions	Load Capacity	Applications
MH-LCJB1-STD	LabOSP Cable Joint Box 1 Width: 450, Length: 900, Height: 600 (mm) En124-B125 Cover	12.5T	Footpaths Grass Verges
MH-LCJB1-ETD	LabOSP Cable Joint Box 1 Width: 450, Length: 900, Height: 900 (mm) En124-B125 Cover	12.5T	Footpaths Grass Verges



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/ partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.



LabOSP Cable Joint Box 2


Size: 450 x 1200 (mm)

- **Anti UV**
- **Light Weight**
- **High Durabilities**
- **Anti-Corrosive**
- **Fire Resistant**


Overview

LabOSP Cable Joint Box manhole system is designed for underground network access, especially for fiber optical and electricity industries. Manufactured with innovated composite material, making LabOSP Cable Joint Box system an ideal solution of strong, light, flexible, time & cost saving comparing to concrete manholes.

Specifications

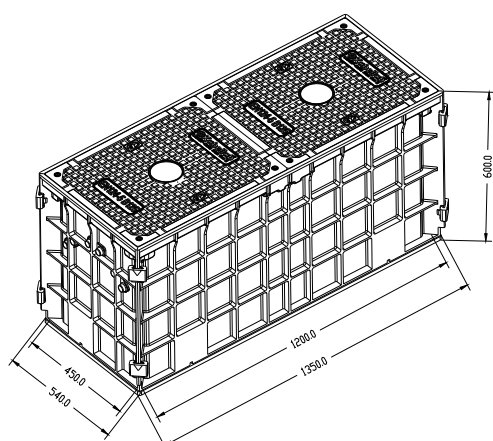

CHAMBER MODEL		Standard Model	Extended Model
Internal Size (mm)	Internal Length	450	450
	Internal Width	1200	1200
External Size (mm)	Internal Length	540	540
	Internal Width	1350	1350
Weight (kg)	Chamber	40.2	63.2
	Base	7	7
Height (mm)		600	900

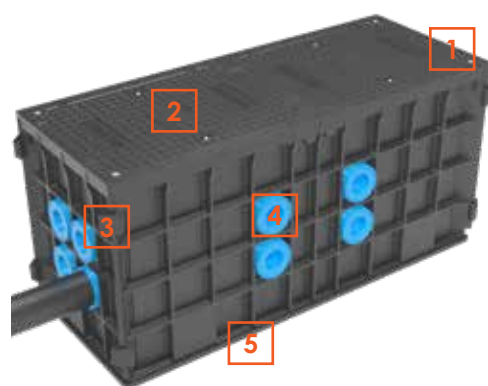

1 Locking System

Thief prevention

2 Access Box Cover

Options for B125 or D400

3 Fast-Clip connection kit

No Bolt or tool required, Knock and Lock

4 Duct Access Socket

Comptiable Duct Size 50mm & 110mm

5 Bottom Plate

- Base provide a clean finish
- Anti-slip and prevent vegetation

6 95% Time Saving

- Low Transport Cost
- Fast set up on site
- 90% Time Saving compare to concrete
- No heavy truck required





1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.

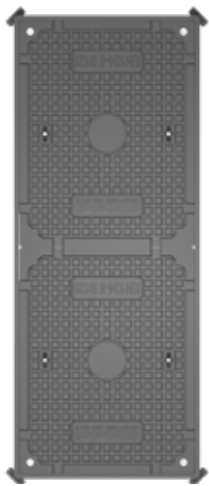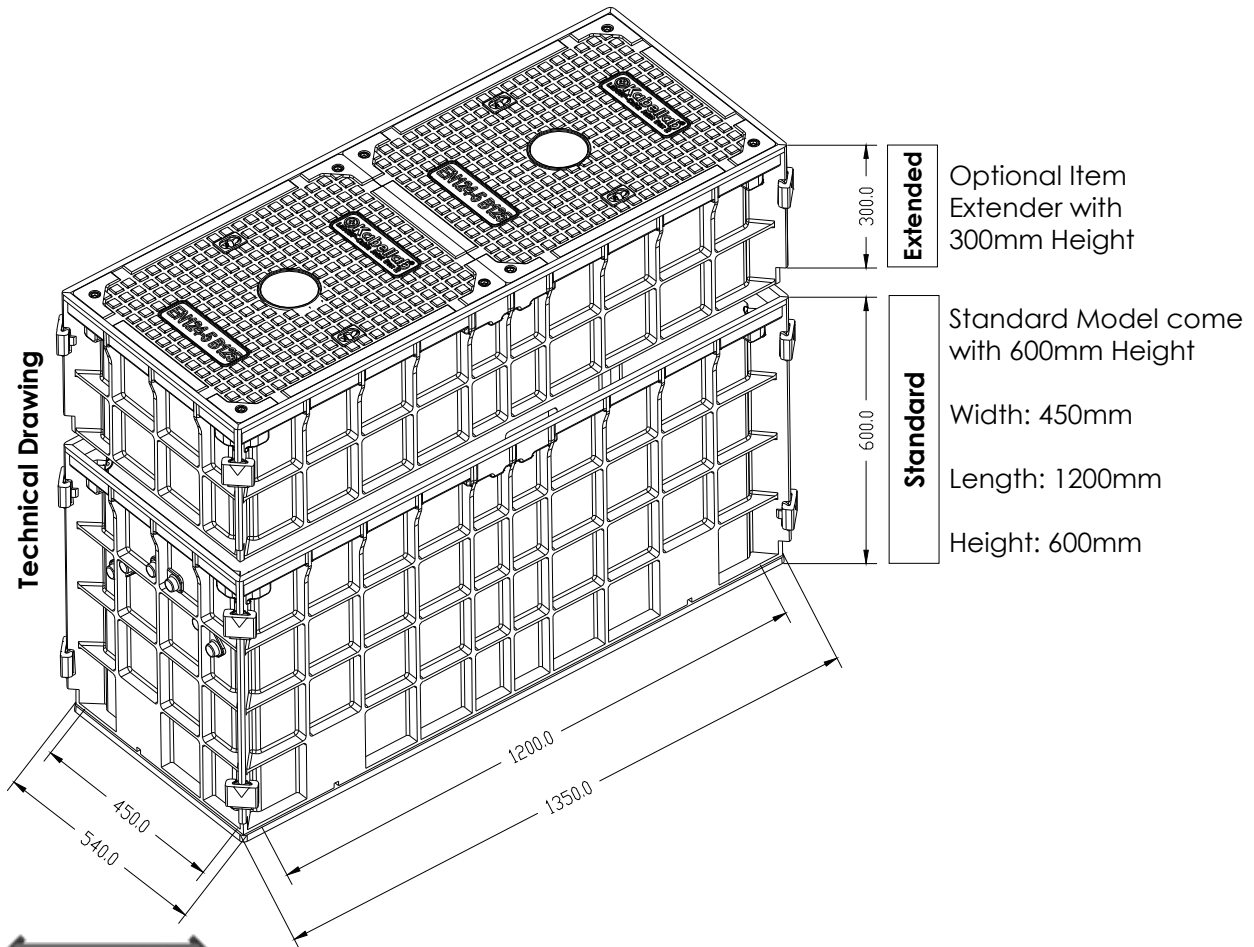

Cover Options Specifications

Cover	Size (mm)	Load Capacity	Weight (kg)	Application
EN124 - B125	510 x 660	12.5 Tonnes	35/lid (2 lids)	Footpaths Grass Verges
EN124 - D400	510 x 660	40 Tonnes	55/lid (2 lids)	Carriageway Traffic Lanes

Order Information

Part Number	Descriptions	Load Capacity	Applications
MH-LCJB2-STD	LabOSP Cable Joint Box 0 Width: 450, Length: 1200, Height: 600 (mm) En124-B125 Cover	12.5T	Footpaths Grass Verges
MH-LCJB2-ETD	LabOSP Cable Joint Box 0 Width: 450, Length: 1200, Height: 900 (mm) En124-B125 Cover	12.5T	Footpaths Grass Verges



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Philippine & China.