


LabPower PDU

Data Center Power Distribution Unit

Kabellab products are meticulously designed for easy installation while maintaining the highest quality with an aesthetically pleasing design. Kabellab combines innovative design with technology to create efficient products that achieve maximum impact. These are Kabellab's guiding principles.

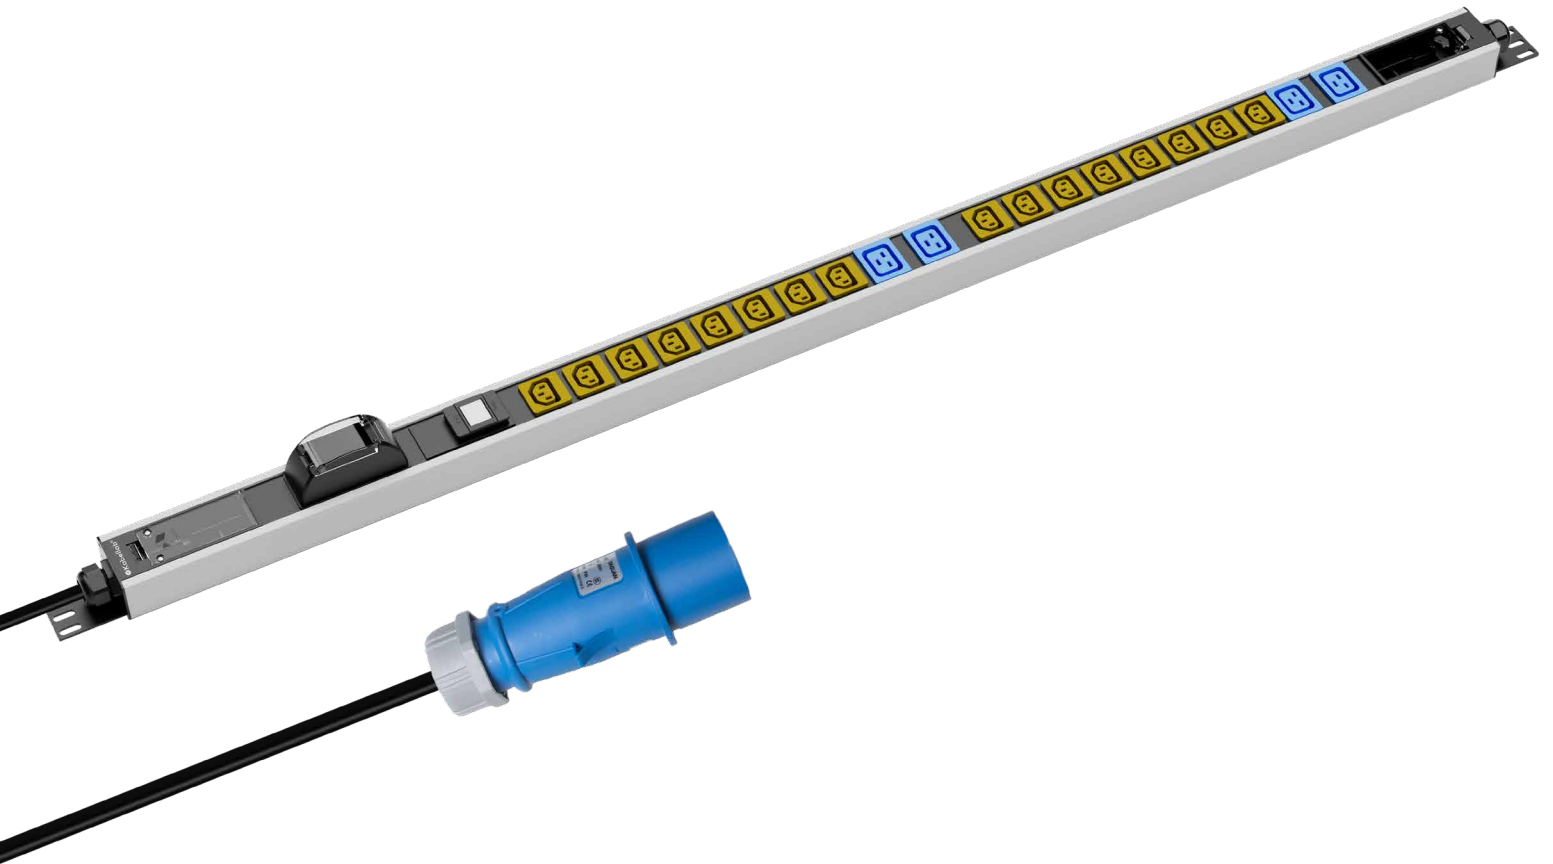

1978 - 2017
IN LOVING MEMORY OF TLM



LabPower-PDU BS20W

Reliable Power. Smart Design

-  **2-Way Circuit Breaker**
-  **V & A Reading Meter**
-  **IEC 60320 C13**
-  **IEC 60320 C19**
-  **BS1316 UK Socket**
-  **IEC 60309**



Overview

The Kabellab LabPower-PDU BS20W is a basic 20-way Power Distribution Unit designed for reliable and efficient power management in data centers, laboratories, and industrial environments.


This model series offers three socket configuration options, catering to diverse equipment connection needs. Each unit is equipped with a dual 3-digit 7-segment display for precise voltage and current monitoring, along with dual circuit breakers that provide enhanced protection and operational safety.

Built with a vertical rack-mount design and IEC outlet configurations, the BS20W ensures optimized space usage, convenient installation, and dependable performance.



Applications

- Vertical rack-mount design for optimized cabinet space
- IEC outlet models for versatile equipment compatibility
- Built-in circuit breaker and surge protection for enhanced electrical safety
- Dual 3-digit 7-segment LED displays showing real-time current and voltage readings

Application: Ideal for data centers, laboratories, and network or equipment racks requiring stable single-phase 230 V power distribution.

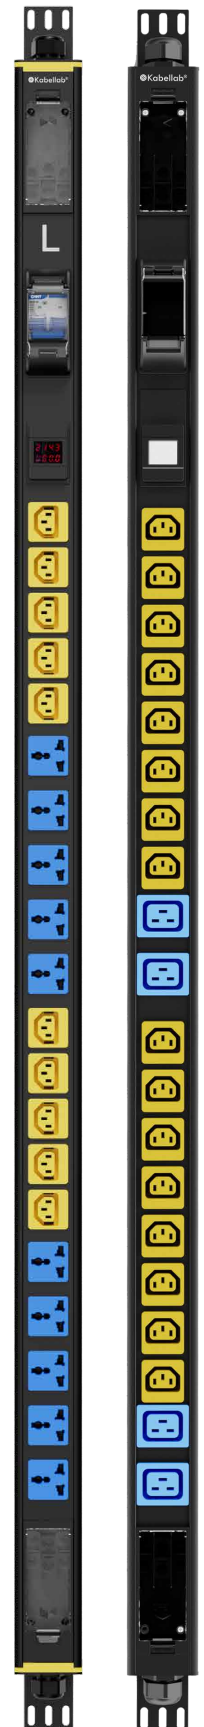


Specifications


			PDU BS20W-I		PDU BS20W-M		PDU BS20W-S	
Electrical								
Electrical Phase Configuration			Single Phase		Single Phase		Single Phase	
Nominal Input Voltage			100-240 VAC		100-240 VAC		100-240 VAC	
Maximum Input Current			32A Max		32A Max		32A Max	
Input Frequency			50-60 Hz		50-60 Hz		50-60 Hz	
Input Connection				32A IEC 60309 Industrial Power Connector		32A IEC 60309 Industrial Power Connector		32A IEC 60309 Industrial Power Connector
Input Power			7680VA (Max)		7680VA (Max)		7680VA (Max)	
Outlet Type		10A Max IEC 320 C13		16		10		12
		16A Max IEC 320 C19		4		X		4
		13A Max BS1316 UK		X		10		4
Meter Measurement				Voltage Reading Display		Voltage Reading Display		Voltage Reading Display
				Currents Reading Display		Currents Reading Display		Currents Reading Display
OPD (Overcurrent Protection Device)				2-Way Circuit Braker		2-Way Circuit Braker		2-Way Circuit Braker
Physical Properties								
Dimensions (L x W x H)			1512.4 x 62 x 45					
Weight								
Power Cord Length			3000mm (3×4.0mm2)		3000mm (3×4.0mm2)		3000mm (3×4.0mm2)	
Environmental								
Temperature (Operating / Storage)			0 – 40°C / -20 – 60°C		0 – 40°C / -20 – 60°C		0 – 40°C / -20 – 60°C	
Elevation (Operating / Storage)								




PDU-BS20W-I

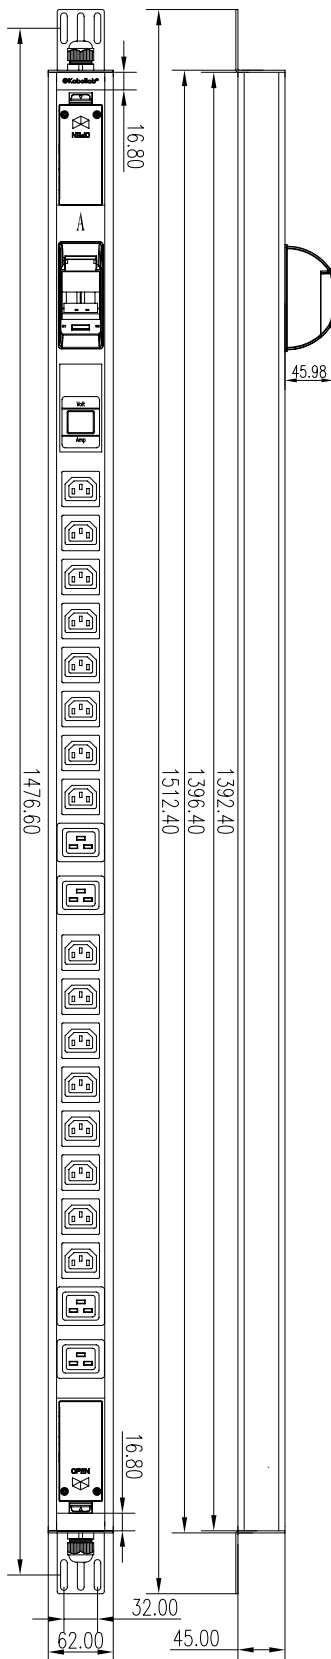

PDU-BS20W-M

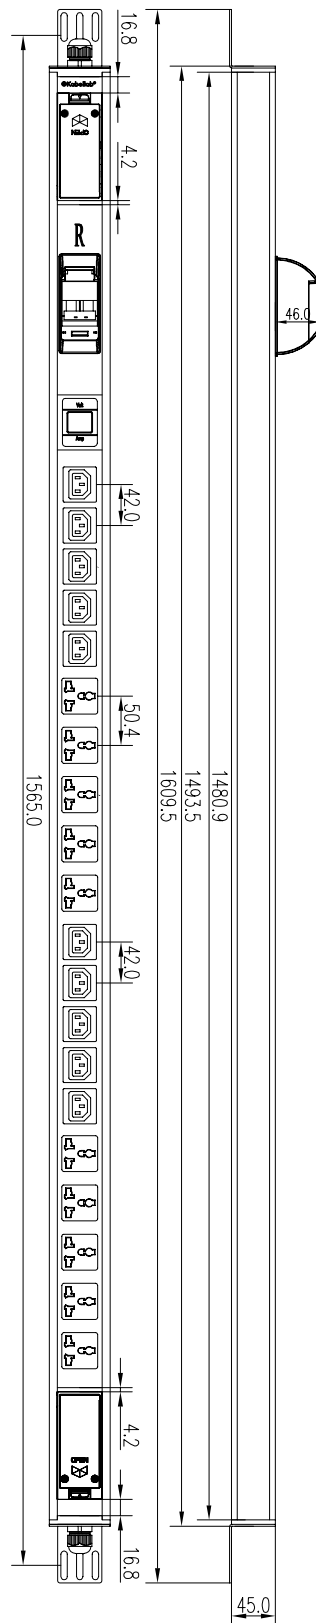

PDU-BS20W-S

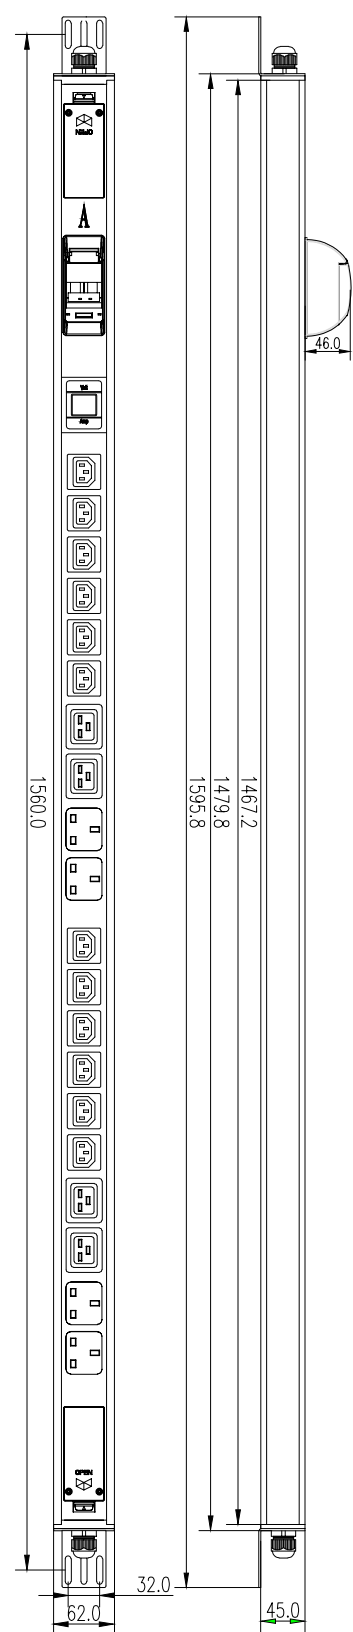

Order Information

Part Number	Products	Description
PDU-BS20W-I	Power Distribution Unit	Single-Phase 20-Way Socket 16x IEC320 C13, 4x IEC320 C19 2-Way Circuit Breaker, Volt & Amp Meter 32A IEC60309, 3.0M power cable
PDU-BS20W-M	Power Distribution Unit	Single-Phase 20-Way Socket 10x IEC320 C13, 10x BS1316 UK 13A 2-Way Circuit Breaker, Volt & Amp Meter 32A IEC60309, 3.0M power cable
PDU-BS20W-S	Power Distribution Unit	Single-Phase 20-Way Socket 12x IEC320 C13, 4x IEC320 C19, 4x BS1316 UK 13A 2-Way Circuit Breaker, Volt & Amp Meter 32A IEC60309, 3.0M power cable
KBL-PWCC1314-1.0M	C13-C14 Power Cord	IEC320 C13 - C14 3x 1.5mm ² Conductor 1.0M power cable
KBL-PWCC1314-1.5M	C13-C14 Power Cord	IEC320 C13 - C14 3x 1.5mm ² Conductor 1.5M power cable
KBL-PWCC1314-3.0M	C13-C14 Power Cord	IEC320 C13 - C14 3x 1.5mm ² Conductor 3.0M power cable
KBL-PWCC1920-1.5M	C19-C20 Power Cord	IEC320 C19 - C20 3x 2.5mm ² Conductor 1.5M power cable
KBL-PWCC1920-3.0M	C19-C20 Power Cord	IEC320 C19 - C20 3x 2.5mm ² Conductor 3.0M power cable



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

The Kabellab Logo is designed by Kabellab Technologies Company. Third-party trademarks mentioned are the property of their respective owners.